

Current transformer, 3-phase for contactor mounting and stand-alone installation 820 A / 1 A, 0.1 VA



Figure similar

product designation		current transformer for overload protection	
General technical data			
protection class IP		IP00	
reference code according to IEC 81346-2		T	
Substance Prohibitance (Date)		05/01/2012	
Inputs/ Outputs			
current at input		205 ... 820 A	
current at output maximum		1 A	
Precision			
measuring precision for current measurement 1		+/- 3 %, in range 205 A ... 4920 A, 50/60 Hz, 25 °C	
Installation/ mounting/ dimensions			
fastening method		screw mounting for mounting on contactors and stand-alone installations	
height		195 mm	
width		230 mm	
depth		170 mm	
Ambient conditions			
ambient temperature during operation		-25 ... +60 °C	
Main circuit			
number of poles for main current circuit		3	
Certificates/ approvals			
General Product Approval		For use in hazard- ous locations	Declaration of Conformity



[Confirmation](#)



other

[Confirmation](#)

[Miscellaneous](#)

Further information

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

<https://www.siemens.com/ic10>


<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3UF1868-3GA00>

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UF1868-3GA00>

<https://support.industry.siemens.com/cs/ww/en/ps/3UF1868-3GA00>

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3UF1868-3GA00&lang=en

<https://support.industry.siemens.com/cs/ww/en/view/109748152>

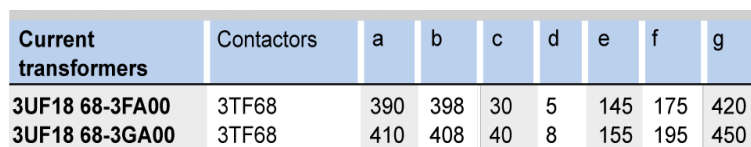

12/23/2020