



Operator panel with display for SIMOCODE pro V, installation in control cabinet door or front plate, can be plugged onto basic unit or extension modules, 7 LEDs for status display and 4 freely assignable keys for manual control, Color: titanium gray

product brand name

SIRIUS

product designation

operating module with display

General technical data

consumed active power

0.3 W

insulation voltage rated value

300 V

surge voltage resistance rated value

4 000 V

protection class IP on the front

IP54

vibration resistance

1-6 Hz / 15 mm; 6-500 Hz / 2 g

reference code according to IEC 81346-2

A

Substance Prohibitance (Date)

07/01/2006

Electromagnetic compatibility

EMC emitted interference according to IEC 60947-1

class A

EMC immunity according to IEC 60947-1

corresponds to degree of severity 3

conducted interference

- due to burst according to IEC 61000-4-4
- due to conductor-earth surge according to IEC 61000-4-5
- due to conductor-conductor surge according to IEC 61000-4-5

1 kV

2 kV

1 kV

field-based interference according to IEC 61000-4-3

10 V/m

Installation/ mounting/ dimensions

mounting position

vertical

fastening method

front plate mounting

height

60 mm

width

96 mm

depth

44 mm

Ambient conditions

installation altitude at height above sea level

- maximum
- 1 maximum
- 2 maximum
- 3 maximum

4 000 m

2 000 m

3 000 m; max. +50 °C (no protective separation)

4 000 m; max. +40 °C (no protective separation)

ambient temperature

- during operation
- during storage
- during transport

0 ... 60 °C

-20 ... +70 °C

-20 ... +70 °C

environmental category

- during operation according to IEC 60721
- during storage according to IEC 60721
- during transport according to IEC 60721





3K6 (no formation of ice, no condensation, relative humidity 10 ... 95%), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6

1K6 (no condensation, relative humidity 10 ... 95%), 1C2 (no salt mist), 1S2 (sand must not get into the devices), 1M4

2K2, 2C1, 2S1, 2M2

Certificates/ approvals

General Product Approval	EMC	Declaration of Conformity
 Confirmation		  

Declaration of Conformity	Test Certificates	Marine / Shipping	other
	Type Test Certificates/Test Report	  	Confirmation

other



Further information

Siemens has decided to exit the Russian market (see here).

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3UF7210-1AA01-0>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UF7210-1AA01-0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)



<https://support.industry.siemens.com/cs/ww/en/ps/3UF7210-1AA01-0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3UF7210-1AA01-0&lang=en

Test report No. A0258, protective separation

<https://support.industry.siemens.com/cs/ww/en/view/109748152>

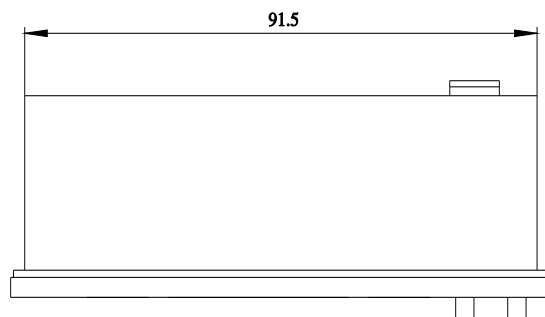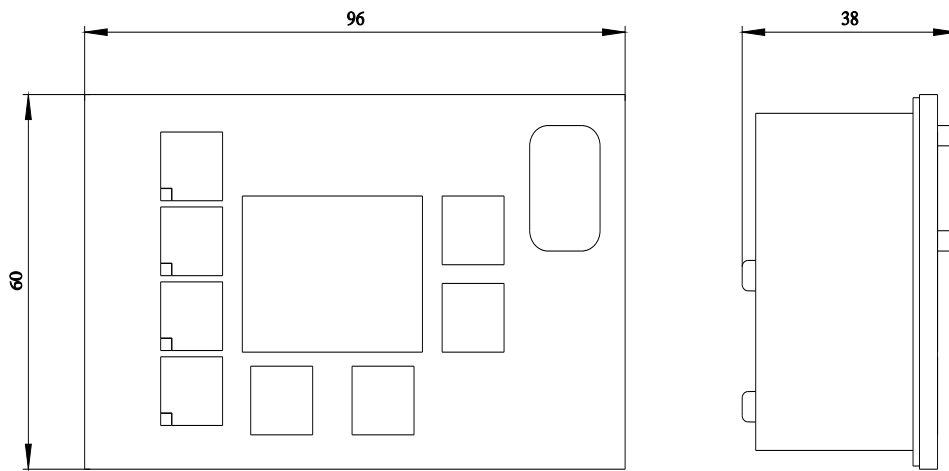

-A

SIEMENS

