



Digital monitoring relay 3-phase supply voltage for IO-Link 50...60 Hz AC 3 x 160 to 690 V Phase sequence, Phase failure Phase asymmetry Undervoltage and overvoltage Hysteresis 1-20 V Line stabilization delay Tripping delay time 1 change-over contact, spring-type connection system

product brand name	SIRIUS
product designation	Network monitoring relay with digital setting
design of the product	5 functions
product type designation	3UG4

### General technical data

product function	Phase monitoring relay
display version LED	No
design of the display	LCD
insulation voltage for overvoltage category III according to IEC 60664	
• with degree of pollution 2 rated value	690 V
degree of pollution	2
type of voltage	
• for monitoring	AC
• of the control supply voltage	DC
surge voltage resistance rated value	6 kV
protection class IP	IP20
shock resistance according to IEC 60068-2-27	sinusoidal half-wave 15g / 11 ms
vibration resistance according to IEC 60068-2-6	1 ... 6 Hz: 15 mm, 6 ... 500 Hz: 2g
mechanical service life (operating cycles) typical	10 000 000
electrical endurance (operating cycles) at AC-15 at 230 V typical	100 000
thermal current of the switching element with contacts maximum	5 A
reference code according to IEC 81346-2	K
relative repeat accuracy	1 %
Substance Prohibitance (Date)	05/01/2012

### Product Function

product function	
• undervoltage detection	Yes
• overvoltage detection	Yes
• phase sequence recognition	Yes
• phase failure detection	Yes
• asymmetry detection	Yes
• overvoltage detection 3 phase	Yes
• undervoltage detection 3 phases	Yes
• voltage window recognition 3 phase	Yes
• adjustable open/closed-circuit current principle	Yes
• external reset	Yes
• auto-RESET	Yes

### Control circuit/ Control

control supply voltage at AC

<ul style="list-style-type: none"> <li>• at 50 Hz rated value</li> <li>• at 60 Hz rated value</li> </ul>	0 ... 0 V
<b>control supply voltage at DC</b>	0 ... 0 V
<ul style="list-style-type: none"> <li>• rated value</li> </ul>	24 ... 24 V
<b>Measuring circuit</b>	
<b>measurable voltage at AC</b>	160 ... 690 V
<b>adjustable response delay time</b>	
<ul style="list-style-type: none"> <li>• when starting</li> <li>• with lower or upper limit violation</li> </ul>	0 ... 999.9 s
<b>accuracy of digital display</b>	0 ... 999.9 s
	+/-1 digit
<b>Precision</b>	
<b>relative metering precision</b>	5 %
<b>Communication/ Protocol</b>	
protocol is supported IO-Link protocol	Yes
<b>IO-Link transfer rate</b>	COM2 (38,4 kBaud)
<b>point-to-point cycle time between master and IO-Link device minimum</b>	10 ms
<b>type of voltage supply via input/output link master data volume</b>	Yes
<ul style="list-style-type: none"> <li>• of the address range of the inputs with cyclical transfer total</li> <li>• of the address range of the outputs with cyclical transfer total</li> </ul>	4 byte
	2 byte
<b>Auxiliary circuit</b>	
number of NC contacts delayed switching	0
number of NO contacts delayed switching	0
<b>number of CO contacts</b>	
<ul style="list-style-type: none"> <li>• for auxiliary contacts</li> <li>• delayed switching</li> </ul>	1
	1
<b>operating frequency with 3RT2 contactor maximum</b>	5 000 1/h
<b>Main circuit</b>	
<b>number of poles for main current circuit</b>	3
<b>ampacity of the output relay at AC-15</b>	
<ul style="list-style-type: none"> <li>• at 250 V at 50/60 Hz</li> <li>• at 400 V at 50/60 Hz</li> </ul>	3 A
	3 A
<b>ampacity of the output relay at DC-13</b>	
<ul style="list-style-type: none"> <li>• at 24 V</li> <li>• at 125 V</li> <li>• at 250 V</li> </ul>	1 A
	0.2 A
	0.1 A
<b>ampacity of the semiconductor output in SIO mode</b>	200 mA
<b>operational current at 17 V minimum</b>	20 mA
<b>continuous current of the DIAZED fuse link of the output relay</b>	4 A
<b>Electromagnetic compatibility</b>	
<b>conducted interference</b>	
<ul style="list-style-type: none"> <li>• due to burst according to IEC 61000-4-4</li> <li>• due to conductor-earth surge according to IEC 61000-4-5</li> <li>• due to conductor-conductor surge according to IEC 61000-4-5</li> </ul>	2 kV
	2 kV
	1 kV
<b>field-based interference according to IEC 61000-4-3</b>	10 V/m
<b>electrostatic discharge according to IEC 61000-4-2</b>	6 kV contact discharge / 8 kV air discharge
<b>Galvanic isolation</b>	
<b>galvanic isolation</b>	
<ul style="list-style-type: none"> <li>• between input and output</li> <li>• between the voltage supply and other circuits</li> </ul>	Yes
	Yes
<b>Connections/ Terminals</b>	
<b>product component removable terminal for auxiliary and control circuit</b>	Yes
<b>type of electrical connection</b>	spring-loaded terminals
<b>type of connectable conductor cross-sections</b>	
<ul style="list-style-type: none"> <li>• solid</li> <li>• finely stranded with core end processing</li> </ul>	2x (0.25 ... 1.5 mm <sup>2</sup> )
	2 x (0.25 ... 1.5 mm <sup>2</sup> )

<ul style="list-style-type: none"> <li>finely stranded without core end processing</li> <li>at AWG cables solid</li> <li>at AWG cables stranded</li> </ul>	2x (0.25 ... 1.5 mm <sup>2</sup> ) 2x (24 ... 16) 2x (24 ... 16)
<b>connectable conductor cross-section</b>	
<ul style="list-style-type: none"> <li>solid</li> <li>finely stranded with core end processing</li> <li>finely stranded without core end processing</li> </ul>	0.25 ... 1.5 mm <sup>2</sup> 0.25 ... 1.5 mm <sup>2</sup> 0.25 ... 1.5 mm <sup>2</sup>
<b>AWG number as coded connectable conductor cross section</b>	
<ul style="list-style-type: none"> <li>solid</li> <li>stranded</li> </ul>	24 ... 16 24 ... 16

### Installation/ mounting/ dimensions

<b>mounting position</b>	any
<b>fastening method</b>	snap-on mounting
<b>height</b>	103 mm
<b>width</b>	22.5 mm
<b>depth</b>	91 mm
<b>required spacing</b>	
<ul style="list-style-type: none"> <li>with side-by-side mounting <ul style="list-style-type: none"> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>downwards</li> <li>at the side</li> </ul> </li> <li>for grounded parts <ul style="list-style-type: none"> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> </ul> </li> <li>for live parts <ul style="list-style-type: none"> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>downwards</li> <li>at the side</li> </ul> </li> </ul>	0 mm 0 mm 0 mm 0 mm 0 mm  0 mm 0 mm 0 mm 0 mm 0 mm  0 mm 0 mm 0 mm 0 mm 0 mm

### Ambient conditions

installation altitude at height above sea level maximum	2 000 m
<b>ambient temperature</b>	
<ul style="list-style-type: none"> <li>during operation</li> <li>during storage</li> <li>during transport</li> </ul>	-25 ... +60 °C -40 ... +85 °C -40 ... +85 °C

### Certificates/ approvals

<b>General Product Approval</b>	<b>EMC</b>
---------------------------------	------------

[Confirmation](#)



[Manufacturer Declaration](#)



<b>Declaration of Conformity</b>	<b>Test Certificates</b>	<b>Marine / Shipping</b>	<b>other</b>
----------------------------------	--------------------------	--------------------------	--------------



[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



[Confirmation](#)

### Railway

[Vibration and Shock](#)

## Further information

**Siemens has decided to exit the Russian market (see here).**

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

**Siemens is working on the renewal of the current EAC certificates.**

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

**Information on the packaging**

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<https://www.siemens.com/ic10>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3UG4815-2AA40>

**Cax online generator**

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UG4815-2AA40>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**


<https://support.industry.siemens.com/cs/ww/en/ps/3UG4815-2AA40>



**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3UG4815-2AA40&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3UG4815-2AA40&lang=en)

**Characteristic: Derating**

<https://support.industry.siemens.com/cs/ww/en/ps/3UG4815-2AA40/manual>

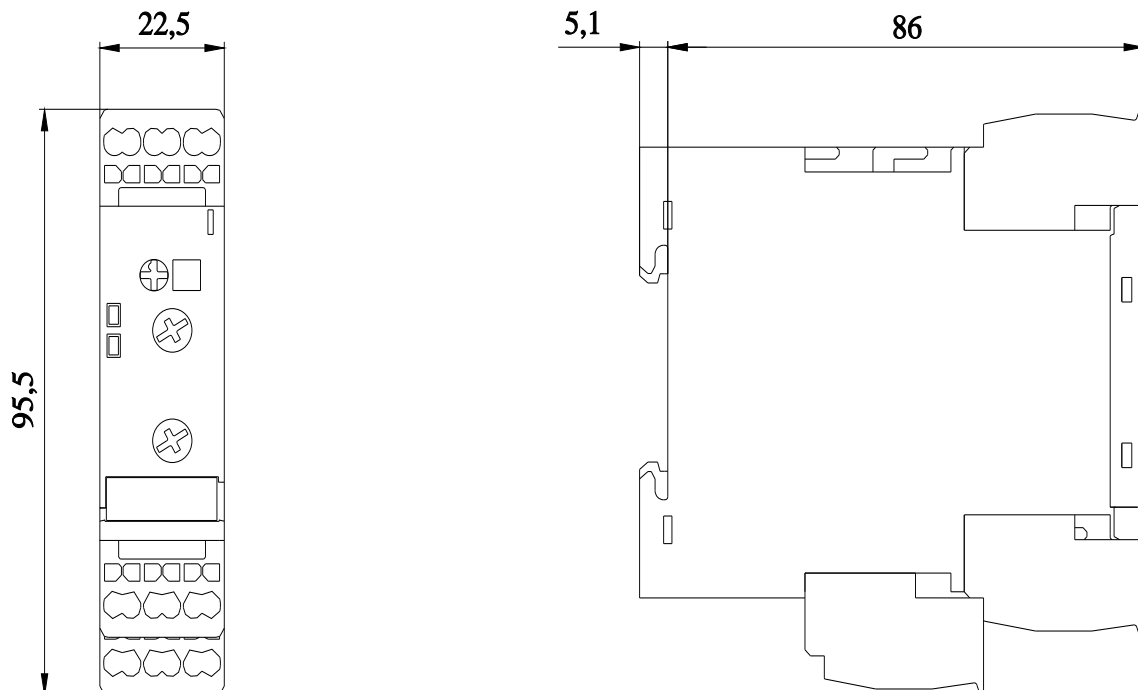

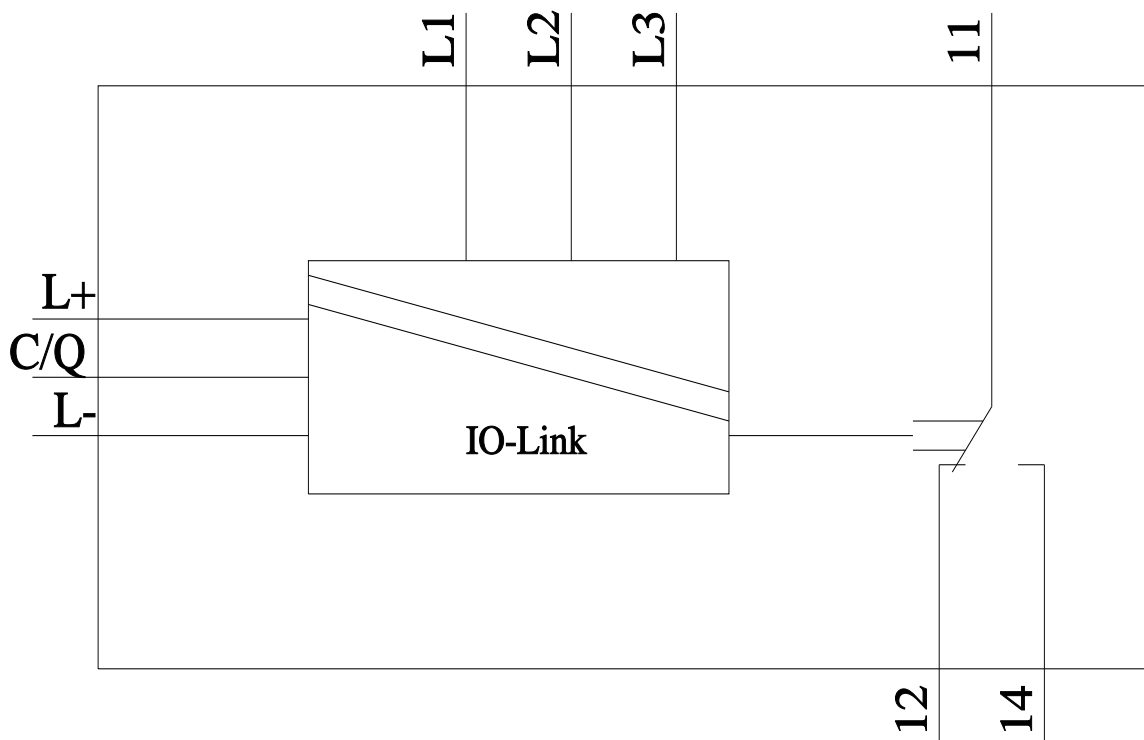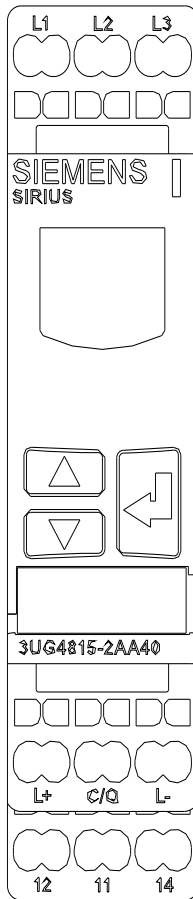

last modified:

3/22/2023 