

wire connector CU with control wire voltage tap-off 3 units accessory for:
3VA5 250



Model	
product brand name	SETRON
product designation	accessories
Product version	circular conductor terminal
Accessories	Wire connector
General technical data	
designation / of the terminal	TC1.4
Voltage	
Current	
Mechanical Design	
Connections according IEC	
IEC-marking / of terminals	16-185 mm ² CU>NNL
stripped length	20 mm
Connections according UL	
UL-marking / of terminals	TC1.4 CMC 6-350 CU9 UR CSA
permissible temperature / of connectable conductor / according to UL 486A-486B	90 °C
stripped length	0.8 in
connectable conductor cross-section	
• for copper cable / stranded / minimum	6 AWG
• for copper cable / stranded / maximum	350 kcmil
• for copper cable / finely stranded / minimum	6 AWG
• for copper cable / finely stranded / maximum	350 kcmil
tightening torque / when using copper cables	
• stranded	6 - 2 AWG: 140 lb-in 1 AWG - 350 kcmil: 275 lb-in
• finely stranded	6 - 2 AWG: 140 lb-in 1 AWG - 350 kcmil: 275 lb-in
Certificates	
General Product Approval	



General Product Approval

EMC

Declaration of Conformity

[Miscellaneous](#)



Declaration of Conformity

Shipping
Approval

other



[Manufacturer
Declaration](#)

[Miscellaneous](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9233-0JK12>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)



<https://support.industry.siemens.com/cs/ww/en/ps/3VA9233-0JK12>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9233-0JK12

Tender specifications

<http://www.siemens.com/specifications>

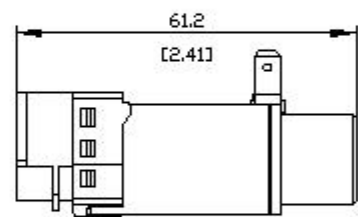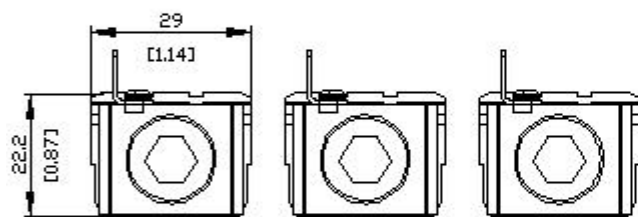

last modified:

12/20/2020 