## **SIEMENS**

Data sheet 3VA9978-0AA12



auxiliary switch changeover contacts type HQ (7mm) accessory for: 3VA4/5/6

| Model   |                                      |
|---|--------------------------------------|
| product brand name                                      | SENTRON                              |
| product designation                                     | auxiliary switch                     |
| Product version   | Accessories for 3VA circuit breakers |
| Accessories   | Auxiliary switch                     |
| General technical data                                  |                                      |
| degree of pollution                                     | 3                                    |
| overvoltage category                                    |                                      |
| Voltage   |                                      |
| surge voltage resistance                                | 4 kV                                 |
| operating voltage / at AC / according to CSA and UL     | 300 V                                |
| operating voltage / at DC / according to CSA and UL     | 250 V                                |
| Rated operational voltage Ue at AC 50 Hz                | 240 V                                |
| operating voltage / at DC / rated value / minimum       | 250 V                                |
| Current   |                                      |
| Thermal current limit Ith                               | 6 A                                  |
| operational current                                     |                                      |
| • at AC-12 / at 12 V                                    | 6 A                                  |
| • at AC-12 / at 24 V                                    | 6 A                                  |
| • at AC-12 / at 48 V                                    | 6 A                                  |
| • at AC-12 / at 125 V                                   | 6 A                                  |
| • at AC-12 / at 220/240 V                               | 6 A                                  |
| • at DC-12 / at 12 V                                    | 6 A                                  |
| • at DC-12 / at 24 V                                    | 4 A                                  |
| • at DC-12 / at 48 V                                    | 2 A                                  |
| • at DC-12 / at 110 V                                   | 0.5 A                                |
| • at DC-12 / at 250 V                                   | 0.25 A                               |
| • at DC-13 / at 12 V                                    | 1 A                                  |
| • at DC-13 / at 24 V                                    | 0.8 A                                |
| • at DC-13 / at 48 V                                    | 0.4 A                                |
| • at DC-13 / at 110 V                                   | 0.2 A                                |
| • at DC-13 / at 250 V                                   | 0.1 A                                |
| • at AC-15 / at 12 V                                    | 3 A                                  |
| • at AC-15 / at 24 V                                    | 3 A                                  |
| • at AC-15 / at 48 V                                    | 3 A                                  |
| • at AC-15 / at 125 V                                   | 3 A                                  |
| • at AC-15 / at 220/240 V                               | 3 A                                  |
| Mechanical Design                                       |                                      |
| tightening torque / with screw-type terminals / minimum | 0.4 N·m                              |
| tightening torque / with screw-type terminals / maximum | 0.5 N·m                              |
| Connections according IEC                               |                                      |

| stripped length AWG number / as coded connectable conductor cross section / for auxiliary contacts | 15 mm      |
|--|------------|
| • minimum  | 20         |
| • maximum  | 16         |
| Connetctions according UL  |            |
| stripped length [in]   | 0.6 in     |
| tightening torque [lbf·in] / with screw-type terminals / minimum                                   | 3.5 lbf·in |
| tightening torque [lbf·in] / with screw-type terminals / maximum                                   | 4.4 lbf·in |
| Further information  |            |

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9978-0AA12

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3VA9978-0AA12

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=3VA9978-0AA12


**CAx-Online-Generator** 


http://www.siemens.com/cax

**Tender specifications** 

http://www.siemens.com/specifications

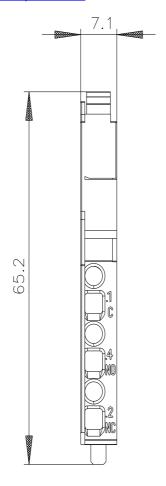

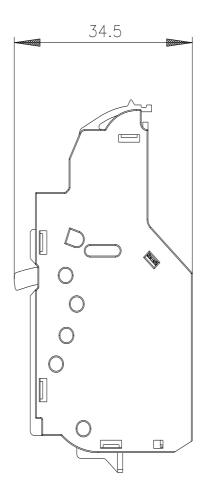

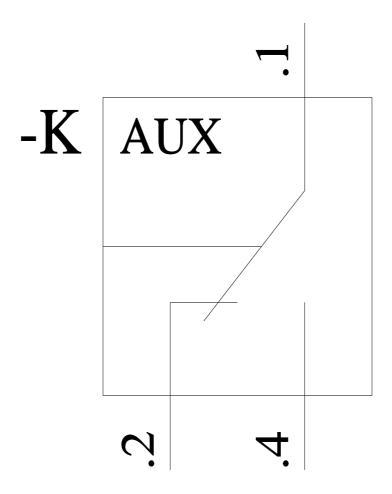

last modified: 12/20/2020 🖸