

TRIP ALARM SWITCH CHANGEOVER CONTACTS TYPE HQ
(7MM) ACCESSORY FOR 3VA4/5/6-BREAKER



Model	
product brandname	SETRON
General technical data	
Degree of pollution	3
Overvoltage category	III
Voltage	
Tension assignée d'isolement Ui	690 V
Tension assignée de tenue aux chocs	4 kV
Operating voltage / at AC / acc. to CSA and UL	300 V
Operating voltage / at DC / acc. to CSA and UL	250 V
Rated operational voltage Ue at AC 50 Hz	240 V
Rated operational voltage Ue with DC	250 V
Electricity	
Thermal current	6 A
Operating current	
• at AC-12 / at 12 V	6 A
• at AC-12 / at 24 V	6 A
• at AC-12 / at 48 V	6 A

- at AC-12 / at 110 V
- at AC-12 / at 230 V
- at DC-12 / at 12 V
- at DC-12 / at 24 V
- at DC-12 / at 48 V
- at DC-12 / at 110 V
- at DC-12 / at 230 V
- at DC-13 / at 12 V
- at DC-13 / at 24 V
- at DC-13 / at 48 V
- at DC-13 / at 110 V
- at DC-13 / at 220 V
- at AC-15 / at 12 V
- at AC-15 / at 24 V
- at AC-15 / at 48 V
- at AC-15 / at 110 V
- at AC-15 / at 230 V

6 A
6 A
6 A
4 A
2 A
0.5 A
0.25 A
1 A
0.8 A
0.4 A
0.2 A
0.1 A
3 A
3 A
3 A
3 A
3 A

Mechanical Design

Width / Note	1 slot (7 mm)
Wire stripping length	15 mm
Wire stripping length [in]	0.6 in

Certificates

EMC	Declaration of Conformity	other
-----	---------------------------	-------



[sonstig](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3VA9978-0AB12>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3VA9978-0AB12/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9978-0AB12

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

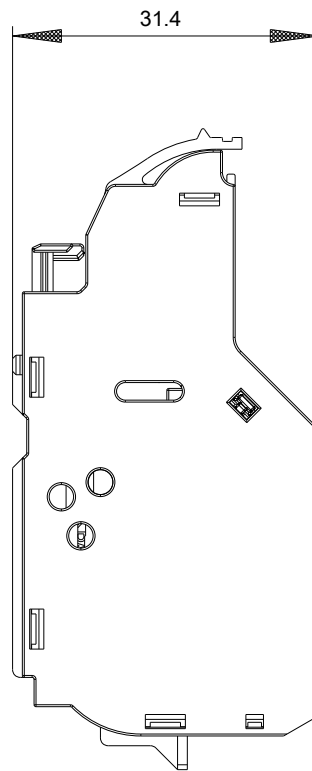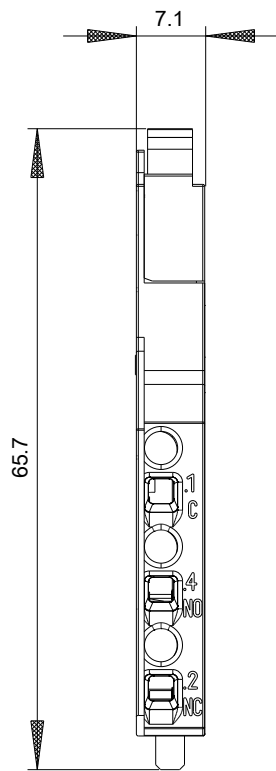

2.

4.

TAS

1.

last modified:

11/25/2016