

Model	
product brandname	SENTRON
General technical data	
Degree of pollution	3
Overtoltage category	III
Consumed active power / at DC / maximum	20 W
Voltage	
Tension assignée d'isolement Ui	690 V
Surge voltage resistance	4 kV
Mechanical Design	
Height	65.1 mm
Width	25.7 mm
Number of slots	3
Depth	28.8 mm
Net weight	91 g
Wire stripping length	10 mm
Wire stripping length [in]	0.4 in

Certificates

EMC	Declaration of Conformity	other
-----	---------------------------	-------



[sonstig](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3VA9978-0BD12>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3VA9978-0BD12/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9978-0BD12

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

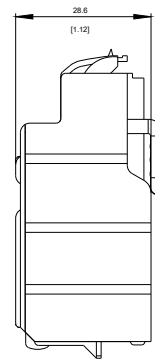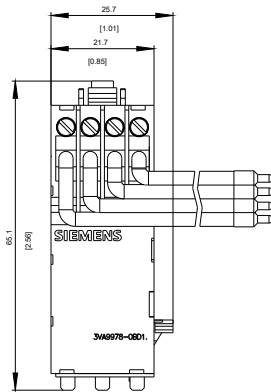

last modified:

11/25/2016