





shunt trip left 24V AC 50/60Hz/24-30V DC accessory for: 3VA4/5/6

Model	
product brand name	SENTRON
product designation	Accessories
design of the product	Auxiliary release
accessories	Auxiliary release
General technical data	
degree of pollution	3
overvoltage category	III
apparent power consumption / maximum	30 VA
consumed active power / at DC / maximum	45 W
Voltage	
surge voltage resistance	4 kV
Mechanical Design	
height	65.1 mm
width	25.7 mm
number of slots	3
depth	31.2 mm
net weight	91 g
tightening torque / with screw-type terminals / minimum	0.4 N·m
tightening torque / with screw-type terminals / maximum	0.5 N·m
Connections according IEC	
stripped length	10 mm
AWG number / as coded connectable conductor cross section / for auxiliary contacts	
• minimum	20
• maximum	16
Connections according UL	
stripped length [in]	0.4 in
tightening torque [lbf·in] / with screw-type terminals / minimum	3.5 lbf·in
tightening torque [lbf·in] / with screw-type terminals / maximum	4.4 lbf·in
Further information	
<b>Information on the packaging</b>	
<a href="https://support.industry.siemens.com/cs/ww/en/view/109813875">https://support.industry.siemens.com/cs/ww/en/view/109813875</a>	
<b>Information- and Downloadcenter (Catalogs, Brochures,...)</b>	
<a href="http://www.siemens.com/lowvoltage/catalogs">http://www.siemens.com/lowvoltage/catalogs</a>	
<b>Industry Mall (Online ordering system)</b>	
<a href="https://mall.industry.siemens.com/mall/en/en/Catalog/product?mfib=3VA9978-0BL30">https://mall.industry.siemens.com/mall/en/en/Catalog/product?mfib=3VA9978-0BL30</a>	
<b>Service&amp;Support (Manuals, Certificates, Characteristics, FAQs,...)</b>	
<a href="https://support.industry.siemens.com/cs/ww/en/ps/3VA9978-0BL30">https://support.industry.siemens.com/cs/ww/en/ps/3VA9978-0BL30</a>	
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)	

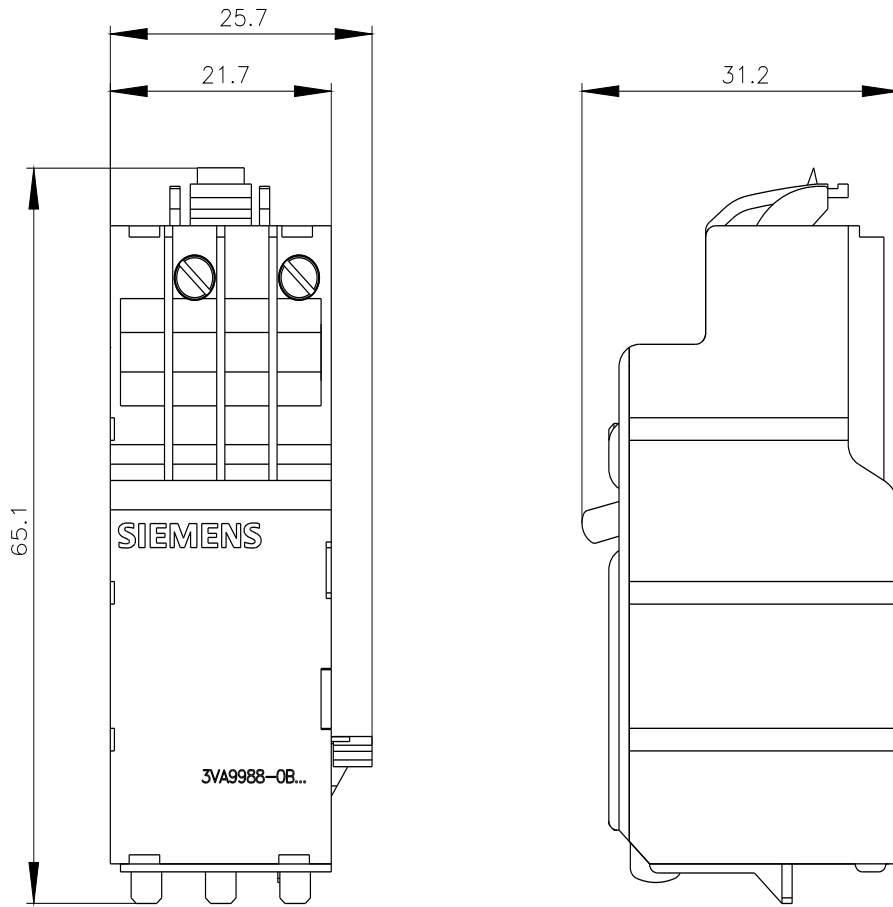

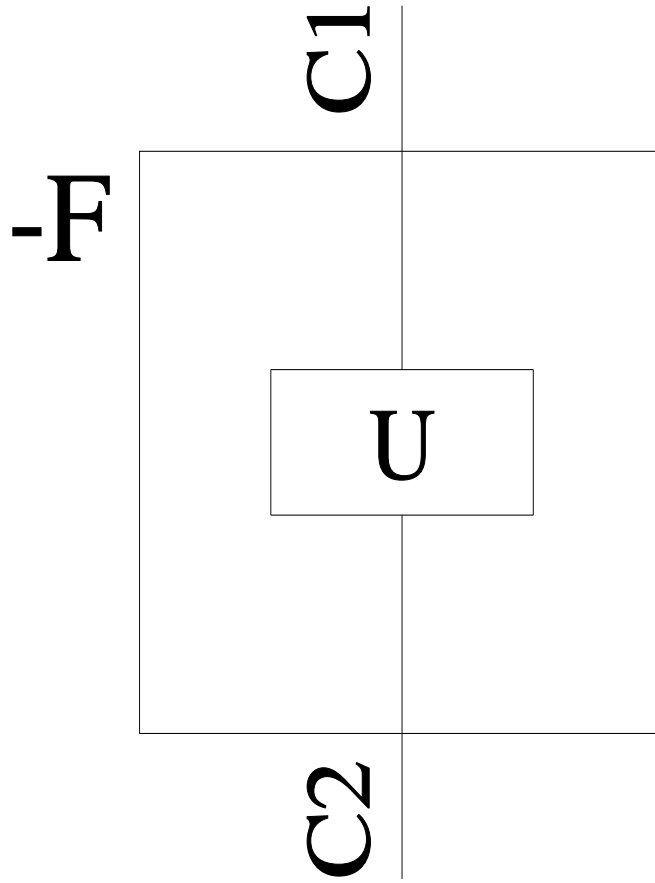

last modified:

12/20/2020 [↗](#)

