



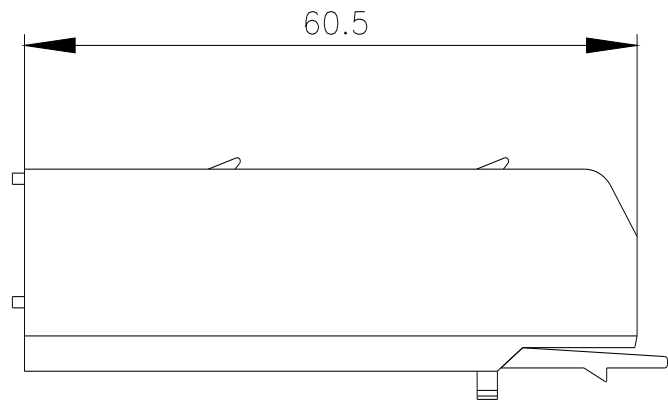

Removable terminal 2-pole, push-in terminals up to maximum 1 x 4 mm² or 2 x 1.5 mm², (in shared wire-end ferrule), for SIRIUS devices in industrial standard mounting rail enclosure

product brand name	SIRIUS
product category	Removable terminals
product designation	Terminal for main circuit/2-pole
design of the product	Spring-loaded terminal (push-in)/1 x 4 mm ²
General technical data	
protection class IP	IP20
Substance Prohibittance (Date)	03/01/2017
type of connectable conductor cross-sections	
• solid	0.5 ... 4 mm ²
• finely stranded with core end processing	0.5 ... 2.5 mm ²
• finely stranded without core end processing	0.5 ... 4 mm ²
• at AWG cables solid	20 ... 12
• at AWG cables stranded	20 ... 12
width	7.5 mm
Further information	
Information- and Downloadcenter (Catalogs, Brochures,...)	
https://www.siemens.com/ic10	
Industry Mall (Online ordering system)	
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3ZY1122-2BA00	
Cax online generator	
http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3ZY1122-2BA00	
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)	
https://support.industry.siemens.com/cs/ww/en/ps/3ZY1122-2BA00	
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)	
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3ZY1122-2BA00&lang=en	
Characteristic: Derating	
https://support.industry.siemens.com/cs/ww/en/ps/3ZY1122-2BA00/manual	

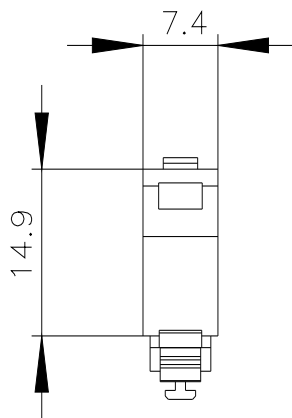

last modified:

1/28/2021 