


TLS3 GD2 PWR TO RLSE 2NC 230V AC/DC NO-ACT M20

Safety > Safety Interlocks > Mechanical Interlocks > Allen-Bradley 440G GuardLocking Switches > TLS-GD2

Guard Locking Switch - 440G TLS-GD2: Solenoid Voltage: 230V AC/DC, Contacts(Safety and Aux): 2 Normally Closed, 1 Normally Open, Actuator: No Actuator, Conduit Entry: M20 Conduit

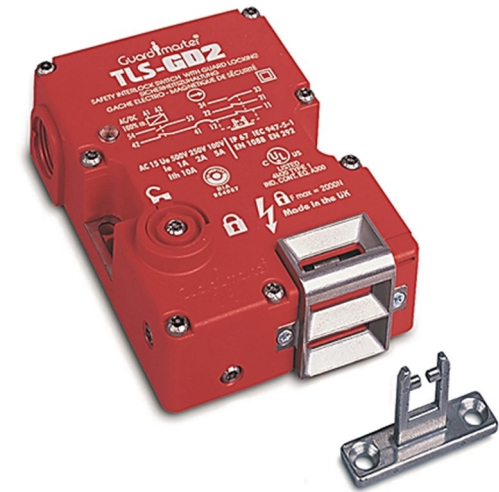

Representative Photo Only
(actual product may vary based on configuration selections)

SPECIFICATIONS	
Safety Switch Type	Guard Locking Switch type
Interlock Type	Power to Release type
Number of Safety Contacts	2 qty safety
Output Configuration, Safety	2 NC
Number of Aux Contacts	1
Output Configuration, Auxiliary	1 NO
Solenoid Voltage, AC/DC, Nom	230 V AC/DC
Holding Force, Max	2000 N
Conduit Entry	M20 entry
Actuator Included	No Y / N
Un, Nominal Operational Voltage, AC	230 V AC
Un, Nominal Operational Voltage, DC	230 V DC
Material, Body / Housing	Glass-Filled PBT / Valox material
Operating Temperature, Max	60 °C max
Operating Temperature, Min	-25 °C min
Storage Temperature, Max	60 °C max
Storage Temperature, Min	-25 °C min
IP Rating	IP67 IP69K

REFERENCES	
IECEEx Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-