


TLS2 GD2 PWR TO LOCK 1NO/1NC 24V AC/DC FLX-ACT 1/2in NPT

Safety > Safety Interlocks > Mechanical Interlocks > Allen-Bradley 440G GuardLocking Switches > TLS-GD2

Guard Locking Switch - TLS-GD2: Solenoid Voltage: 24V AC/DC, Contacts(Safety and Aux): 2 Normally Closed, 1 Normally Open, Actuator: Fully Flex, Conduit Entry: 1/2 in NPT Adapter

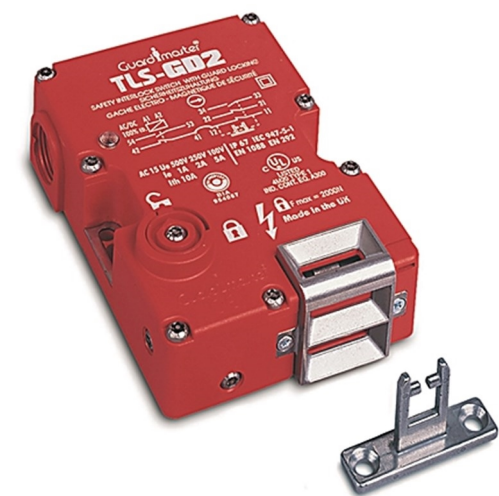

Representative Photo Only
(actual product may vary based on configuration selections)

SPECIFICATIONS	
Safety Switch Type	Guard Locking Switch type
Number of Safety Contacts	2 qty safety
Number of Aux Contacts	1
Solenoid Voltage, AC/DC, Nom	24 V AC/DC
Holding Force, Max	2000 N
Conduit Entry	1 x M20 entry
Actuator Included	Yes Y / N
Includes actuator guide	Yes Y / N
Material, Body / Housing	Glass-Filled PBT / Valox material
Ex Rated	No
Operating Temperature, Max	60 °C max
Operating Temperature, Min	-25 °C min
Storage Temperature, Max	60 °C max
Storage Temperature, Min	-25 °C min
IP Rating	IP67 IP69K

REFERENCES	
IECEx Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-