


TLS3 GD2 PWR TO RLSE 2NC 24V AC/DC FLEX-ACT M20

Safety > Safety Interlocks > Mechanical Interlocks > Allen-Bradley 440G GuardLocking Switches > TLS-GD2

Guard Locking Switch - TLS-GD2: Solenoid Voltage: 24V AC/DC, Contacts(Safety and Aux): 2 Normally Closed, 1 Normally Open, Actuator: No Actuator

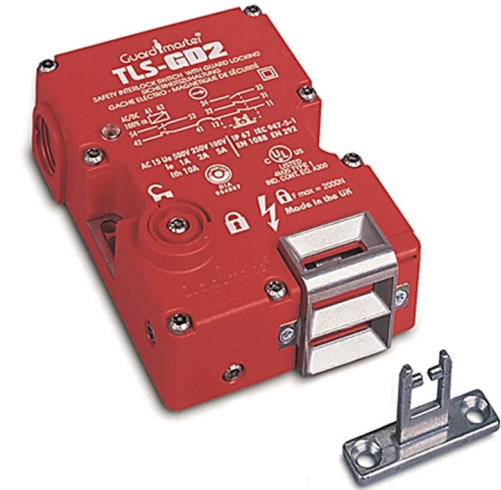

Representative Photo Only
(actual product may vary based on configuration selections)

SPECIFICATIONS	
Safety Switch Type	Guard Locking Switch type
Interlock Type	Power to Release type
Number of Safety Contacts	2 qty safety
Output Configuration, Safety	2 NC
Number of Aux Contacts	1
Output Configuration, Auxiliary	1 NO
Solenoid Voltage, AC/DC, Nom	24 V AC/DC
Holding Force, Max	2000 N
Conduit Entry	M20 entry
Actuator Included	No Y / N
Includes actuator guide	Yes Y / N
Un, Nominal Operational Voltage, AC	24 V AC
Un, Nominal Operational Voltage, DC	24 V DC
Material, Body / Housing	Glass-Filled PBT / Valox material
Ex Rated	No
Operating Temperature, Max	60 °C max
Operating Temperature, Min	-25 °C min
Storage Temperature, Max	60 °C max
Storage Temperature, Min	-25 °C min
IP Rating	IP67 IP69K

REFERENCES	
IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-