

USIG MIT ST-SI - Fuse modular terminal block



5022106

<https://www.phoenixcontact.com/pc/products/5022106>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Fuse modular terminal block, with fuse plug, fuse type: Glass / ceramics / ..., fuse type: G / 5 x 20 / 5 x 25 / 5 x 30 / 6.3 x 32, nom. voltage: 500 V, nominal current: 10 A, connection method: Screw connection, 1 level, Rated cross section: 1.5 mm², cross section: 0.5 mm²- 16 mm², mounting type: NS 35/7,5, NS 35/15, NS 32, color: black

Commercial data

Item number	5022106
Packing unit	50 pc
Minimum order quantity	1 pc
Product key	BE1234
GTIN	4017918285821
Weight per piece (including packing)	36.53 g
Weight per piece (excluding packing)	36.28 g
Customs tariff number	85363010
Country of origin	PL

USIG MIT ST-SI - Fuse modular terminal block



5022106

<https://www.phoenixcontact.com/pc/products/5022106>

Technical data

Product properties

Product type	Fuse terminal block
Number of connections	2
Number of rows	1
Potentials	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Fuse type	Glass / ceramics / ...
Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	2.43 W
Fuse	G / 5 x 20 / 5 x 25 / 5 x 30 / 6.3 x 32
Maximum power dissipation	max. 2.5 W (with single arrangement of the fuse terminal block in the event of overload)
	max. 2.5 W (With interconnected arrangement of several fuse terminal blocks in the event of overload)
	max. 4 W (with single arrangement of the fuse terminal block in the event of a short-circuit)
	max. 4 W (With interconnected arrangement of several fuse terminal blocks in the event of a short-circuit)

Connection data

Number of connections per level	2
Nominal cross section	16 mm ²

1 level

Screw thread	M4
Tightening torque	1.5 ... 1.8 Nm
Stripping length	13 mm
Internal cylindrical gage	A5
Connection in acc. with standard	IEC 60947-7-3
Conductor cross section rigid	0.5 mm ² ... 16 mm ²
Cross section AWG	20 ... 6 (converted acc. to IEC)
Conductor cross section flexible	0.5 mm ² ... 16 mm ²
Conductor cross section, flexible [AWG]	20 ... 6 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.5 mm ² ... 16 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.5 mm ² ... 10 mm ²
Cross-section with insertion bridge, rigid	16 mm ²
Cross-section with insertion bridge, flexible	16 mm ²
2 conductors with same cross section, solid	0.5 mm ² ... 4 mm ²

USIG MIT ST-SI - Fuse modular terminal block



5022106

<https://www.phoenixcontact.com/pc/products/5022106>

2 conductors with same cross section, flexible	0.5 mm ² ... 6 mm ²
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.5 mm ² ... 6 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ² ... 6 mm ²
Nominal current	10 A (is determined by the fuse used)
Maximum load current	40 A (As a disconnect terminal block)
Nominal voltage	500 V (As a fuse terminal block)
	500 V (As a disconnect terminal block)
Nominal cross section	1.5 mm ²

Dimensions

Width	10.2 mm
-------	---------

Material specifications

Color	black
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	28 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Mechanical properties

Mechanical data

Open side panel	No
-----------------	----

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-60 °C ... 105 °C (max. short-term operating temperature RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

USIG MIT ST-SI - Fuse modular terminal block



5022106

<https://www.phoenixcontact.com/pc/products/5022106>

Standards and regulations

Connection in acc. with standard	IEC 60947-7-3
----------------------------------	---------------

Mounting

Mounting type	NS 35/7,5
	NS 35/15
	NS 32

USIG MIT ST-SI - Fuse modular terminal block




5022106

<https://www.phoenixcontact.com/pc/products/5022106>

Drawings

Circuit diagram

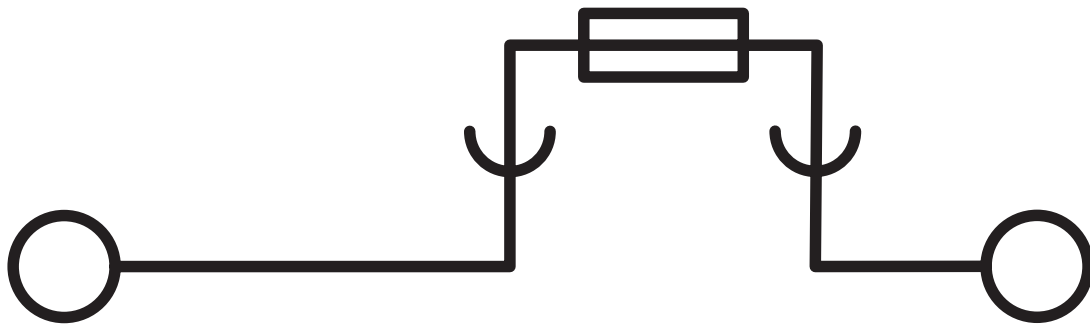


USIG MIT ST-SI - Fuse modular terminal block

5022106

<https://www.phoenixcontact.com/pc/products/5022106>



Circuit diagram

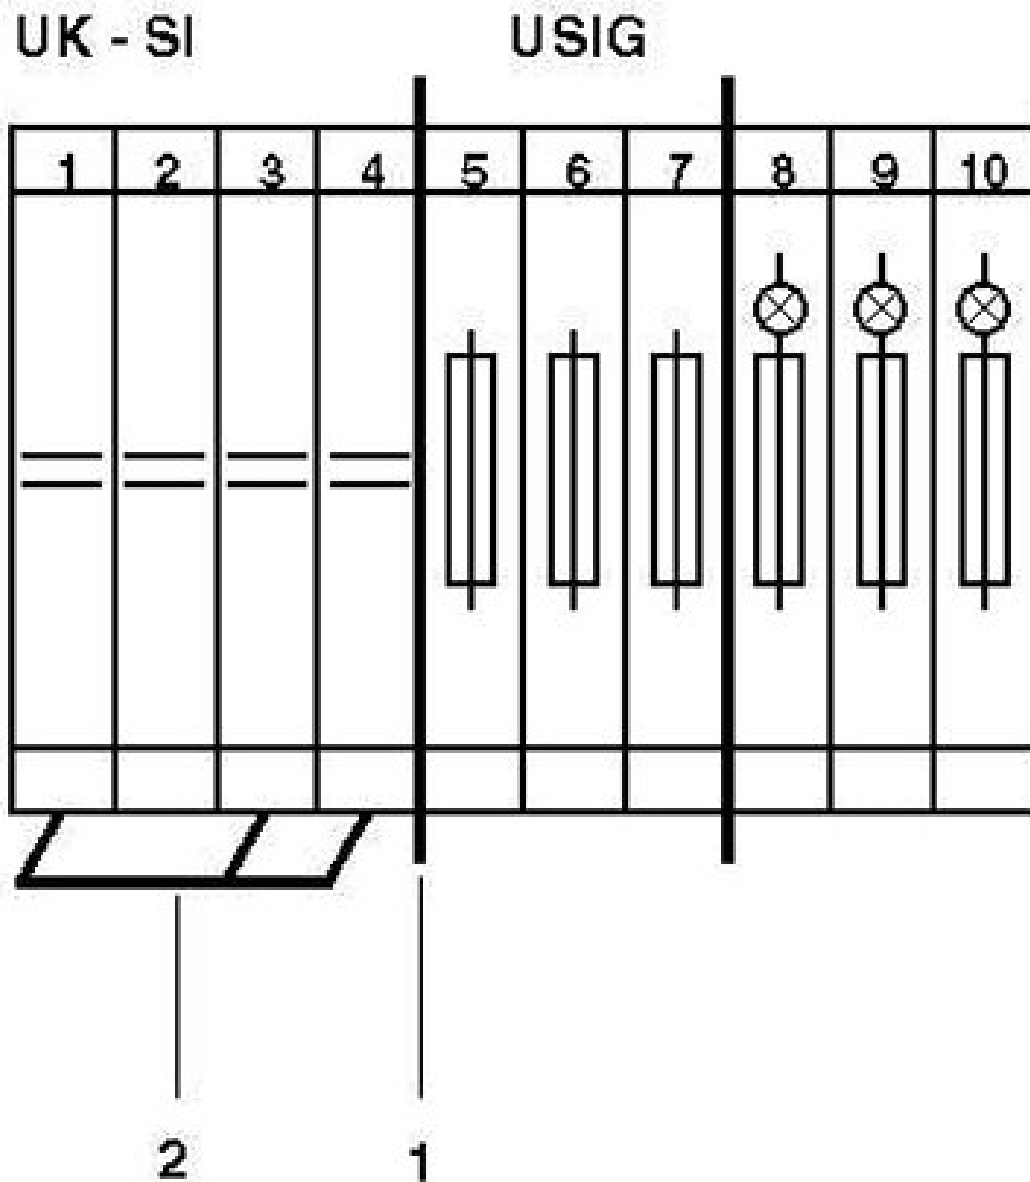

USIG MIT ST-SI - Fuse modular terminal block



5022106

<https://www.phoenixcontact.com/pc/products/5022106>

Classifications

ECLASS

ECLASS-11.0	27141116
-------------	----------

ETIM

ETIM 8.0	EC000899
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

USIG MIT ST-SI - Fuse modular terminal block



5022106
<https://www.phoenixcontact.com/pc/products/5022106>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com