SIEMENS

Data sheet US2:52BR8GS



30mm BlackMax, Epoxy Coated Corrosion Resistant Metal Operator, Round Illuminated Twist-to-Release Transformer type, 120V AC Incandescent Lamp Mushroom Head Cap Small 1.79" (45 mm) Plastic Cap, Green 2 Position Maintained, Twist-to-Release UL Listed, CSA Certified NEMA 1,3,3R,4,4X,12,13 & Automotive Standards

Figure similar

design of the product	Actuator round
Enclosure	
number of command points	1
delivery state as a kit	No
Actuator	
product extension optional light source	Yes
material of the actuating element	plastic
type of unlocking device	rotate-to-unlatch mechanism
number of switching positions	2
Front ring	
product component front ring	Yes
design of the front ring	standard
material of the front ring	metal
color of the front ring	black
Holder	
material of the holder	Metal
Contact block/ lampholder	
socket design	BA 9s with lamp
number of lampholders	1
Display	
number of LED modules	0
General technical data	
product component	
lamp transformer	Yes
• light source	Yes
degree of pollution	1
type of voltage	
 of the operating voltage 	
	AC
of the input voltage	AC AC
of the input voltage	AC
of the input voltage surge voltage resistance rated value	AC 4 kV
of the input voltage surge voltage resistance rated value protection class IP	AC 4 kV IP66
of the input voltage surge voltage resistance rated value protection class IP of the terminal	AC 4 kV IP66
of the input voltage surge voltage resistance rated value protection class IP of the terminal Supply voltage	AC 4 kV IP66 IP20
of the input voltage surge voltage resistance rated value protection class IP of the terminal Supply voltage type of voltage of the supply voltage of the light source	AC 4 kV IP66 IP20
of the input voltage surge voltage resistance rated value protection class IP of the terminal Supply voltage type of voltage of the supply voltage of the light source supply voltage of the light source at AC at 60 Hz	AC 4 kV IP66 IP20 AC
of the input voltage surge voltage resistance rated value protection class IP of the terminal Supply voltage type of voltage of the supply voltage of the light source supply voltage of the light source at AC at 60 Hz orated value	AC 4 kV IP66 IP20 AC

screw-type terminals
Screw-type terminal
20 N·m
8 8 lbf-in
filament lamp
clear
finger-safe
-35 +70 °C
-40 +85 °C
round

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=US2:52BR8GS

Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=US2:52BR8GS

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/US2

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=US2:52BR8GS&lang=en

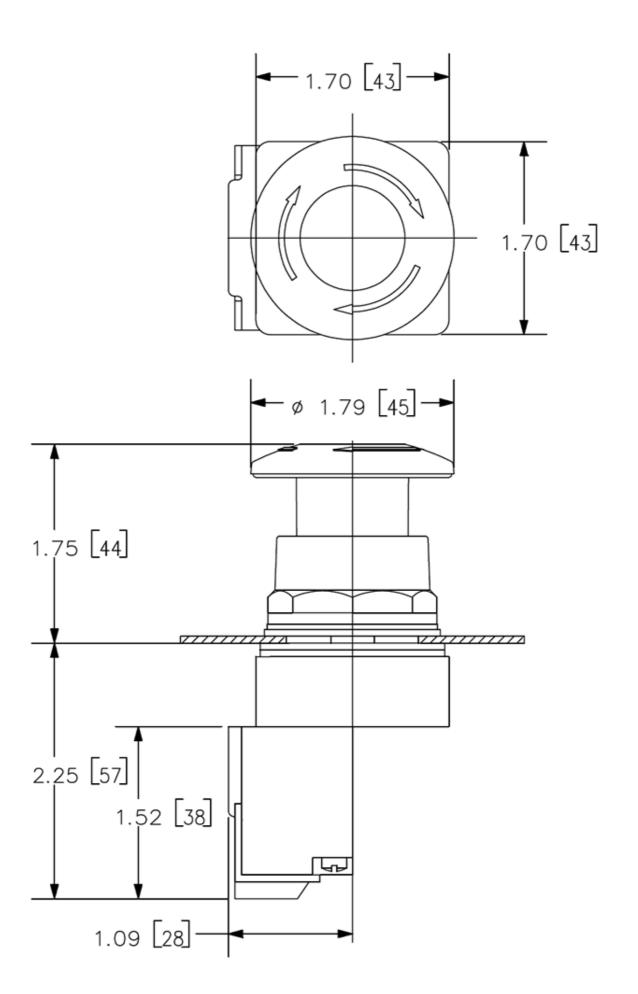

last modified: 5/31/2021 🖸

US2:52BR8G\$ Page 4/4	3