

# BC-381X9- 6 GN - PCB terminal block



5442785

<https://www.phoenixcontact.com/us/products/5442785>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



PCB terminal block, nominal current: 13.5 A, rated voltage (III/2): 200 V, nominal cross section: 1.5 mm<sup>2</sup>, number of potentials: 6, number of rows: 1, number of positions per row: 6, product range: BC-X9, pitch: 3.81 mm, connection method: Screw connection with tension sleeve, screw head form: L Slotted, mounting: Wave soldering, conductor/PCB connection direction: 0 °, color: pastel green, Pin layout: Linear pinning, Solder pin [P]: 3.5 mm, number of solder pins per potential: 1, type of packaging: packed in cardboard

## Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 5442785       |
| Packing unit                         | 100 pc        |
| Minimum order quantity               | 100 pc        |
| Sales key                            | AA12          |
| Product key                          | AALFPH        |
| GTIN                                 | 4046356838801 |
| Weight per piece (including packing) | 3.071 g       |
| Weight per piece (excluding packing) | 3.008 g       |
| Customs tariff number                | 85369010      |
| Country of origin                    | CN            |

# BC-381X9- 6 GN - PCB terminal block



5442785

<https://www.phoenixcontact.com/us/products/5442785>

## Technical data

### Product properties

|                           |                                |
|---------------------------|--------------------------------|
| Product type              | Printed circuit board terminal |
| Product family            | BC-X9                          |
| Product line              | COMBICON Terminals S           |
| Number of positions       | 6                              |
| Pitch                     | 3.81 mm                        |
| Number of connections     | 6                              |
| Number of rows            | 1                              |
| Number of potentials      | 6                              |
| Pin layout                | Linear pinning                 |
| Solder pins per potential | 1                              |

### Electrical properties

|                             |        |
|-----------------------------|--------|
| Nominal current $I_N$       | 13.5 A |
| Nominal voltage $U_N$       | 200 V  |
| Degree of pollution         | 3      |
| Rated voltage (III/3)       | 160 V  |
| Rated surge voltage (III/3) | 2.5 kV |
| Rated voltage (III/2)       | 200 V  |
| Rated surge voltage (III/2) | 2.5 kV |
| Rated voltage (II/2)        | 400 V  |
| Rated surge voltage (II/2)  | 2.5 kV |

### Connection data

#### Connection technology

|                       |                     |
|-----------------------|---------------------|
| Nominal cross section | 1.5 mm <sup>2</sup> |
|-----------------------|---------------------|

#### Conductor connection

|                                                                       |                                               |
|-----------------------------------------------------------------------|-----------------------------------------------|
| Connection method                                                     | Screw connection with tension sleeve          |
| Conductor cross section rigid                                         | 0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>  |
| Conductor cross section flexible                                      | 0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>  |
| Conductor cross section AWG                                           | 26 ... 16                                     |
| Conductor cross section flexible, with ferrule without plastic sleeve | 0.25 mm <sup>2</sup> ... 0.5 mm <sup>2</sup>  |
| Conductor cross section, flexible, with ferrule, with plastic sleeve  | 0.25 mm <sup>2</sup> ... 0.5 mm <sup>2</sup>  |
| 2 conductors with same cross section, solid                           | 0.14 mm <sup>2</sup> ... 0.5 mm <sup>2</sup>  |
| 2 conductors with same cross section, flexible                        | 0.14 mm <sup>2</sup> ... 0.34 mm <sup>2</sup> |
| Stripping length                                                      | 5 mm                                          |
| Tightening torque                                                     | 0.22 Nm ... 0.25 Nm                           |

### Mounting

|               |                |
|---------------|----------------|
| Mounting type | Wave soldering |
|---------------|----------------|

# BC-381X9- 6 GN - PCB terminal block



5442785

<https://www.phoenixcontact.com/us/products/5442785>

|                       |                |
|-----------------------|----------------|
| Pin layout            | Linear pinning |
| Drive form screw head | Slotted (L)    |

## Material specifications

### Material data - contact

|                                             |                                                                                  |
|---------------------------------------------|----------------------------------------------------------------------------------|
| Note                                        | WEEE/RoHS-compliant, free of whiskers according to IEC 60068-2-82/JEDEC JESD 201 |
| Contact material                            | Cu alloy                                                                         |
| Surface characteristics                     | Tin-plated                                                                       |
| Metal surface terminal point (top layer)    | Tin (5 - 7 $\mu\text{m}$ Sn)                                                     |
| Metal surface terminal point (middle layer) | Nickel (2 - 3 $\mu\text{m}$ Ni)                                                  |
| Metal surface soldering area (top layer)    | Tin (5 - 7 $\mu\text{m}$ Sn)                                                     |
| Metal surface soldering area (middle layer) | Nickel (2 - 3 $\mu\text{m}$ Ni)                                                  |

### Material data - housing

|                                                                   |                     |
|-------------------------------------------------------------------|---------------------|
| Color (Housing)                                                   | pastel green (6019) |
| Insulating material                                               | PA                  |
| Insulating material group                                         | I                   |
| CTI according to IEC 60112                                        | 600                 |
| Flammability rating according to UL 94                            | V0                  |
| Glow wire flammability index GWFI according to EN 60695-2-12      | 850                 |
| Glow wire ignition temperature GWIT according to EN 60695-2-13    | 775                 |
| Temperature for the ball pressure test according to EN 60695-10-2 | 125 °C              |

## Notes

|                     |                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note on application | For safe conductor connection, always adhere to a defined tightening torque. Particularly in the case of PCB terminal blocks with two or three positions, the individual solder pin for each contact point cannot compensate for this. That is why the terminal blocks must be supported during conductor connection (held with one hand, support on the housing). |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## Dimensions

|                       |                                                                                      |
|-----------------------|--------------------------------------------------------------------------------------|
| Dimensional drawing   |  |
| Pitch                 | 3.81 mm                                                                              |
| Width [w]             | 22.86 mm                                                                             |
| Height [h]            | 12 mm                                                                                |
| Length [l]            | 7.3 mm                                                                               |
| Installed height      | 8.5 mm                                                                               |
| Solder pin length [P] | 3.5 mm                                                                               |

# BC-381X9- 6 GN - PCB terminal block



5442785

<https://www.phoenixcontact.com/us/products/5442785>

|                |              |
|----------------|--------------|
| Pin dimensions | 0.5 x 0.9 mm |
| PCB design     |              |
| Hole diameter  | 1.1 mm       |

## Electrical tests

### Air clearances and creepage distances |

|                                                        |                     |
|--------------------------------------------------------|---------------------|
| Specification                                          | IEC 60664-1:2007-04 |
| Insulating material group                              | I                   |
| Comparative tracking index (IEC 60112)                 | CTI 600             |
| Rated insulation voltage (III/3)                       | 160 V               |
| Rated surge voltage (III/3)                            | 2.5 kV              |
| minimum clearance value - non-homogenous field (III/3) | 1.5 mm              |
| minimum creepage distance (III/3)                      | 2 mm                |
| Rated insulation voltage (III/2)                       | 200 V               |
| Rated surge voltage (III/2)                            | 2.5 kV              |
| minimum clearance value - non-homogenous field (III/2) | 1.5 mm              |
| minimum creepage distance (III/2)                      | 1.5 mm              |
| Rated insulation voltage (II/2)                        | 400 V               |
| Rated surge voltage (II/2)                             | 2.5 kV              |
| minimum clearance value - non-homogenous field (II/2)  | 1.5 mm              |
| minimum creepage distance (II/2)                       | 2 mm                |

## Environmental and real-life conditions

### Ambient conditions

|                                         |                                                                               |
|-----------------------------------------|-------------------------------------------------------------------------------|
| Ambient temperature (operation)         | -40 °C ... 100 °C (Depending on the current carrying capacity/derating curve) |
| Ambient temperature (storage/transport) | -40 °C ... 70 °C                                                              |
| Relative humidity (storage/transport)   | 30 % ... 70 %                                                                 |
| Ambient temperature (assembly)          | -5 °C ... 100 °C                                                              |

## Packaging specifications

|                   |                     |
|-------------------|---------------------|
| Type of packaging | packed in cardboard |
|-------------------|---------------------|


# BC-381X9- 6 GN - PCB terminal block

5442785


<https://www.phoenixcontact.com/us/products/5442785>

## Drawings

Dimensional drawing

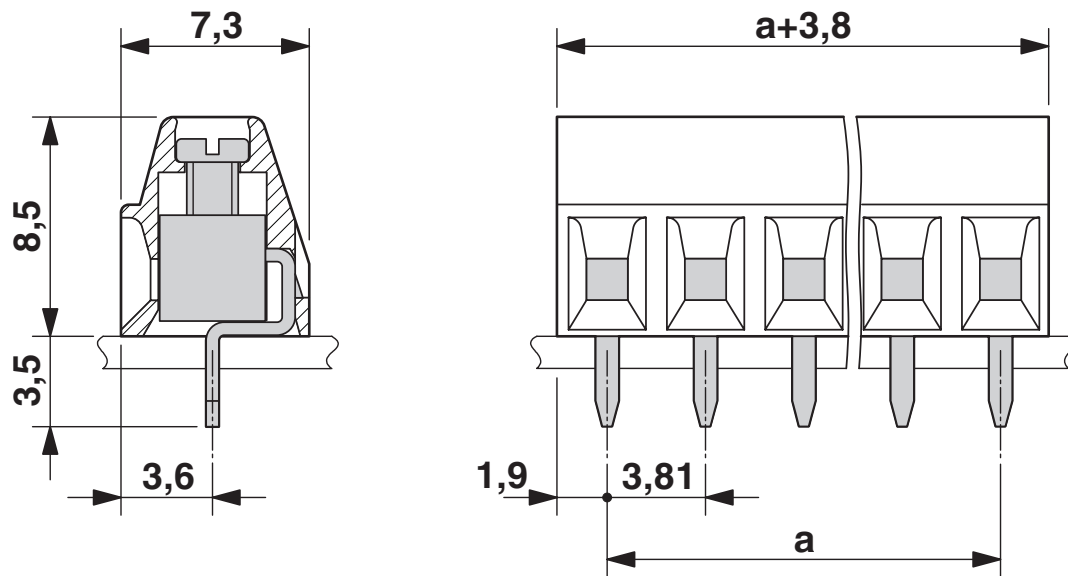

Drilling plan/solder pad geometry

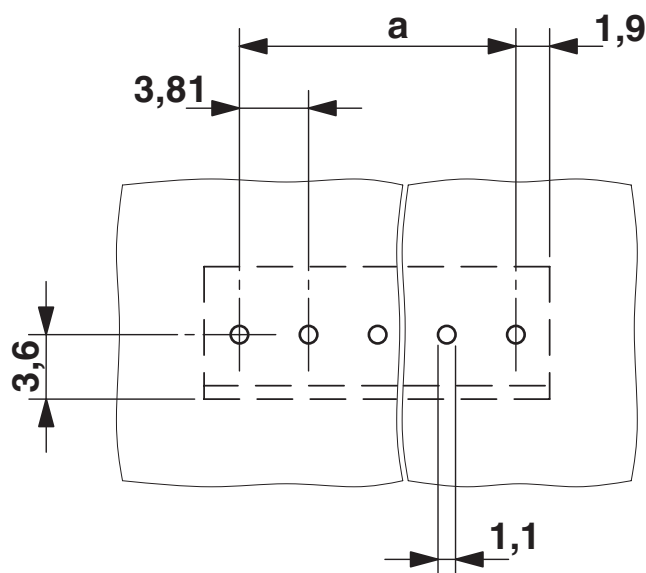


# BC-381X9- 6 GN - PCB terminal block



5442785

<https://www.phoenixcontact.com/us/products/5442785>

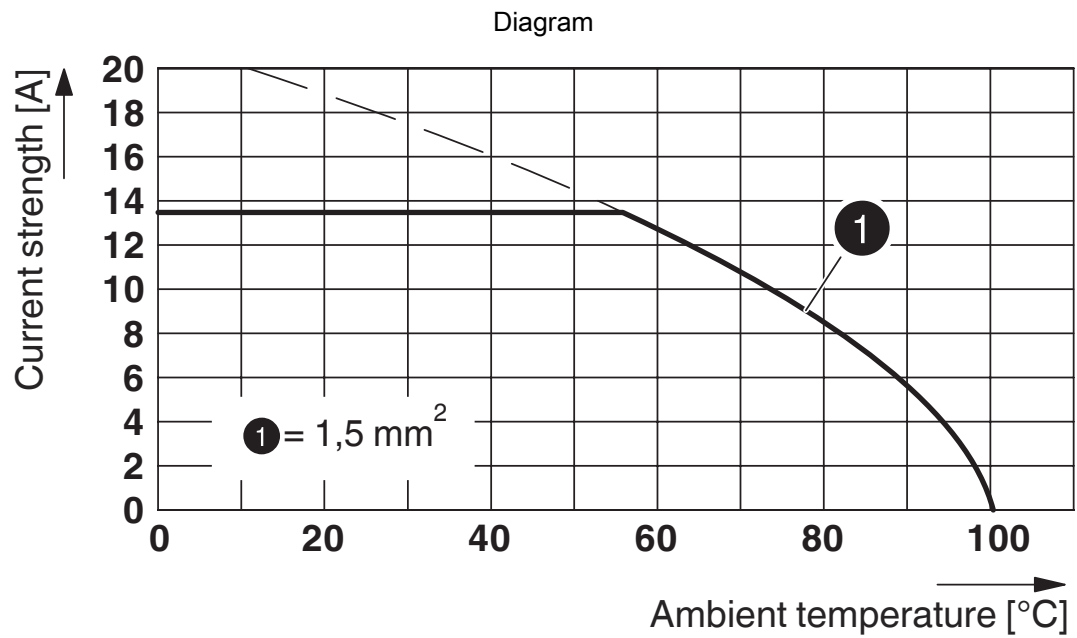

# BC-381X9- 6 GN - PCB terminal block



5442785

<https://www.phoenixcontact.com/us/products/5442785>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/5442785>

|  <b>cULus Recognized</b><br>Approval ID: E60425-20071007 |                       |                       |                   |                             |
|-------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
|                                                                                                                                           | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
| Use group B                                                                                                                               |                       |                       |                   |                             |
|                                                                                                                                           | 300 V                 | 10 A                  | 30 - 16           | -                           |
| Use group D                                                                                                                               |                       |                       |                   |                             |
|                                                                                                                                           | 300 V                 | 10 A                  | 30 - 16           | -                           |

|  <b>VDE Zeichengenehmigung</b><br>Approval ID: 40042618 |                       |                       |                   |                             |
|------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
|                                                                                                                                          | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|                                                                                                                                          | 200 V                 | 17.5 A                | -                 | 0.14 - 1.5                  |

# BC-381X9- 6 GN - PCB terminal block



5442785

<https://www.phoenixcontact.com/us/products/5442785>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27460101 |
| ECLASS-12.0 | 27460101 |
| ECLASS-13.0 | 27460101 |

### ETIM

|          |          |
|----------|----------|
| ETIM 8.0 | EC002643 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

# BC-381X9- 6 GN - PCB terminal block



5442785

<https://www.phoenixcontact.com/us/products/5442785>

## Environmental product compliance

|                                         |                                                                                                                                                                                                                                   |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS                                 |                                                                                                                                                                                                                                   |
| Fulfills EU RoHS substance requirements | Yes                                                                                                                                                                                                                               |
| Exemption                               | 6(c)                                                                                                                                                                                                                              |
| China RoHS                              |                                                                                                                                                                                                                                   |
| Environment friendly use period (EFUP)  | EFUP-50                                                                                                                                                                                                                           |
|                                         | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |
| EU REACH SVHC                           |                                                                                                                                                                                                                                   |
| REACH candidate substance (CAS No.)     | Lead(CAS: 7439-92-1)                                                                                                                                                                                                              |

# BC-381X9- 6 GN - PCB terminal block



5442785

<https://www.phoenixcontact.com/us/products/5442785>

## Accessories

### SZS 0,4X2,5 VDE - Screwdriver

1205037

<https://www.phoenixcontact.com/us/products/1205037>



Screwdriver, slot-headed, VDE insulated, size: 0.4 x 2.5 x 80 mm, 2-component grip, with non-slip grip

### SK 3,81/2,8:FORTL.ZAHLEN - Marker card

0804109

<https://www.phoenixcontact.com/us/products/0804109>



Marker card, Sheet, white, labeled, horizontal: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... (99)100, mounting type: adhesive, for terminal block width: 3.81 mm, lettering field size: 3.81 x 2.8 mm, Number of individual labels: 14

## BC-381X9- 6 GN - PCB terminal block

5442785

<https://www.phoenixcontact.com/us/products/5442785>



## B-STIFT - Marker pen

1051993

<https://www.phoenixcontact.com/us/products/1051993>



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)