

EM-DUO 120/15/SPD - Socket



5601283

<https://www.phoenixcontact.com/us/products/5601283>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Rail-mounted dual power outlet with two 120 V AC/15 A receptacles equipped with transient voltage surge suppression (TVSS) for 35 mm DIN rail per EN 60715. The outlet protects laptops, instrumentation, and other sensitive 120 V AC-powered equipment from damage caused by transients on the branch circuit.
Housing color: ivory. National version: USA. Connection type: screw.

Product description

Rail-mountable utility outlet with integrated surge protection for 120 V AC power.

Commercial data

Item number	5601283
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BE76
Product key	BE7613
GTIN	4046356410489
Weight per piece (including packing)	222.22 g
Weight per piece (excluding packing)	222.22 g
Customs tariff number	85363030
Country of origin	US

EM-DUO 120/15/SPD - Socket

5601283

<https://www.phoenixcontact.com/us/products/5601283>



Technical data

Product properties

Product type	Socket
For country-specific use in	USA
	Canada
	Mexico
	Bahamas
	Bermuda
	Columbia
	Costa Rica
	Ecuador
	El Salvador
	Panama
	Puerto Rico
	Taiwan
	Venezuela
	Virgin Islands

Electrical properties

Nominal voltage U_N	125 V AC
Nominal current I_N	15 A

Connection data

Connection method	Screw connection
Stripping length	8 mm
Conductor cross section flexible	4 mm ²
Conductor cross section rigid	6 mm ²
Cross section AWG	10
Screw thread	M3

Dimensions

Width	82 mm
Height	135 mm
Depth	135 mm

Material specifications

Color	ivory
Insulating material	Polycarbonate & ABS blend
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3

EM-DUO 120/15/SPD - Socket



5601283

<https://www.phoenixcontact.com/us/products/5601283>

Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-20 °C ... 60 °C (max. short-term operating temperature RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Standards

Standards/regulations	UL 508
	CSA 22.2
	UL 1449 ed. 2

EM-DUO 120/15/SPD - Socket


5601283

<https://www.phoenixcontact.com/us/products/5601283>



Drawings

Connection diagram

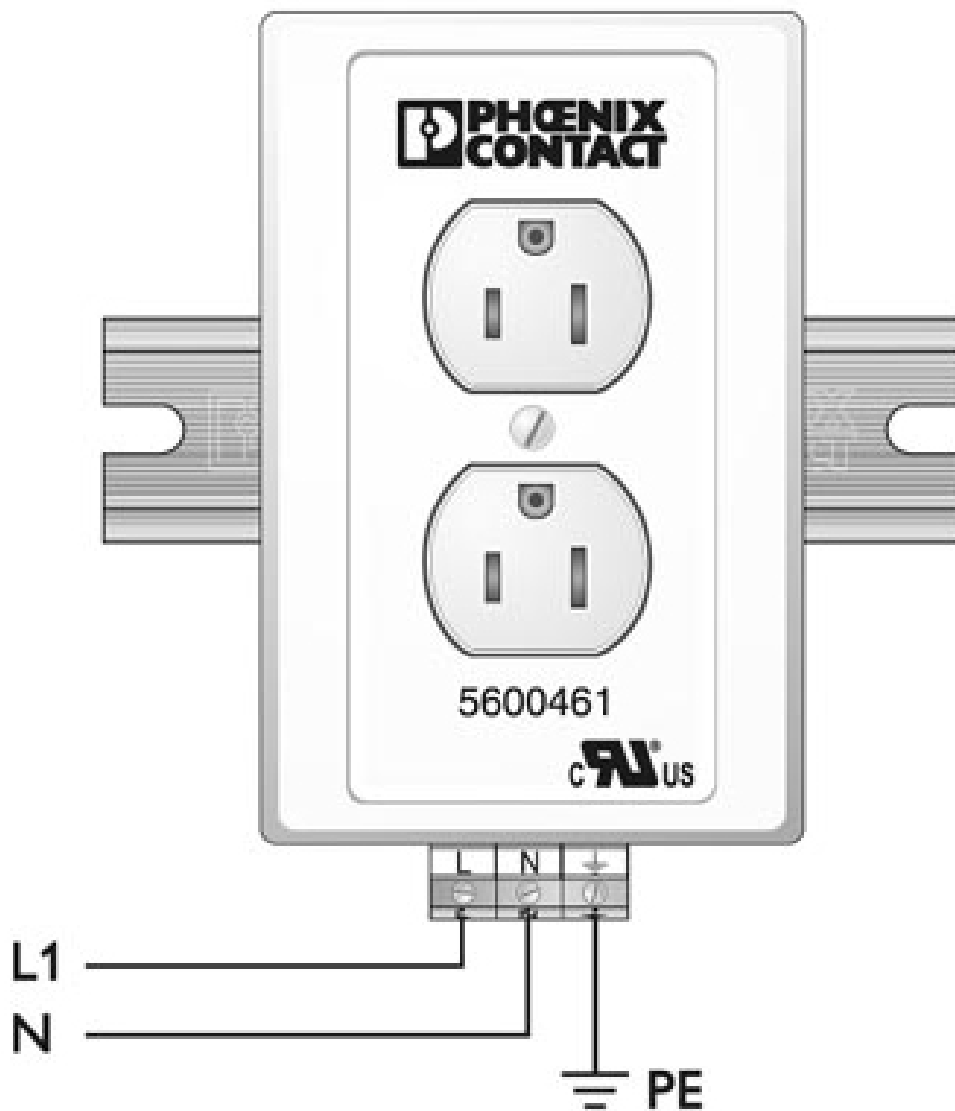

EM-DUO 120/15/SPD - Socket



5601283

<https://www.phoenixcontact.com/us/products/5601283>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/5601283>

	UL Listed Approval ID: FILE E 238705			
	Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
	125 V	15 A	-	30 - 10

	cUL Listed Approval ID: FILE E 238705			
	Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
	125 V	15 A	30 - 10	-

cULus Listed

EM-DUO 120/15/SPD - Socket



5601283

<https://www.phoenixcontact.com/us/products/5601283>

Classifications

ECLASS

ECLASS-11.0	27142305
ECLASS-12.0	27142305
ECLASS-13.0	27142305

ETIM

ETIM 8.0	EC001663
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	6(c), 7(a), 7(c)-I
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)