

DIAZED FUSE LINK 500V QUICK-RESPONSE,SZ.DIII



Similar to image

| Technical data:                                          |    |                  |
|----------------------------------------------------------|----|------------------|
| Color coding of the fuse link                            |    | white            |
| Current / for AC / rated value                           | A  | 50               |
| Tripping characteristic class                            |    | quick acting (F) |
| Size of the fallback-system / acc. to DIN EN 60269-1     |    | DIII             |
| Supply voltage                                           |    |                  |
| • for AC / rated value                                   | V  | 500              |
| • for DC                                                 | V  | 500              |
| Switching capacity current                               |    |                  |
| • in accordance with IEC 60947-2 / rated value           | kA | 50               |
| • with DC / in accordance with IEC 60947-2 / rated value | kA | 8                |
| Ambient temperature                                      |    |                  |
| • minimum                                                | °C | -5               |
| • maximum                                                | °C | 40               |

Certificates/approvals:

| General Product Approval                                                                  | Declaration of Conformity                                                                     | Test Certificates                                  | other                                       |
|-------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|----------------------------------------------------|---------------------------------------------|
| <br>GOST | <br>EG-Konf. | <a href="#">Type Test Certificates/Test Report</a> | <a href="#">Environmental Confirmations</a> |

#### Further information:

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

##### Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<http://support.automation.siemens.com/WW/view/en/5SB321/all>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5SB321](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SB321)

##### CAX-Online-Generator

<http://www.siemens.com/cax>

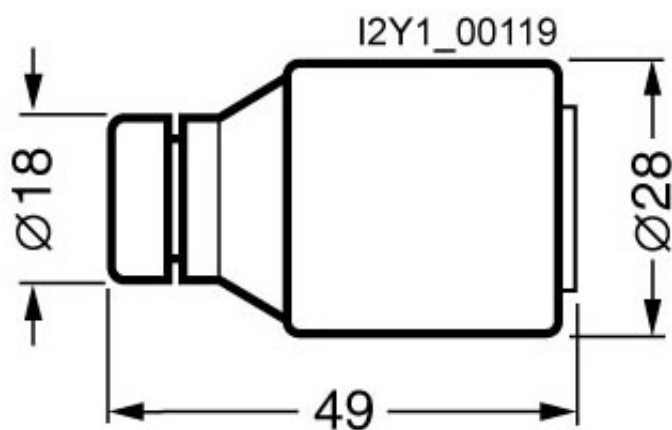

last change:

Nov 4, 2012