

RES.CURRENT OP.CIRCUIT BREAKER TYPE AC WS
40A 3+N-POL IFN 30MA 400V 4MW SUCCESSOR
5SV4 344-0



Figure similar

Model		
product brand name		SENTRON
Product designation		RCCB
Design of the product		Instantaneous
General technical data		
Number of poles		4
Size of installation devices / acc. to DIN 43880		1
Protection against electrical shock		Finger and back-of-hand safe
circuit-breaker / Design		5SM3
Mechanical service life (switching cycles) / typical		10 000
Overvoltage category		III
Supply voltage		
Supply voltage		
• at AC / Rated value	V	400
• for testing equipment / minimum	V	100
Protection class		
Protection class IP		IP20, if the distribution board is installed, with connected conductors

Switching capacity		
Switching capacity current		
• acc. to EN 60898 / Rated value	kA	0.8
Dissipation		
Active power loss		
• for rated value of the current / at AC / in hot operating state / per pole	W	3
Electricity		
Tripping residual current / Rated value	mA	30
rated current I _n / IEC, DIN/VDE / at 40 Cel	A	40
Type of fault current		AC
Current / at AC / Rated value	A	40
Product details		
Product property		
• halogen-free		Yes
• silicon-free		Yes
Product expansion / can be installed / supplementary devices		Yes
Number		
Number of test cycles / for environmental testing / acc. to IEC 60068-2-30		28
Connections		
Connectable conductor cross-section / stranded		
• minimum	mm ²	1.5
• maximum	mm ²	25
Connectable conductor cross-section / solid		
• minimum	mm ²	1.5
• maximum	mm ²	25
Tightening torque / with screw-type terminals		
• minimum	N·m	2.5
• maximum	N·m	3
Position / of power supply cord		top or bottom
Mechanical Design		
Height	mm	90
Width	mm	72
Depth	mm	77
mounting position		any
Installation depth	mm	70
Number of width units		4
Mounting type		DIN rail (REG)
Net weight	g	451

Environmental conditions

Ambient temperature

• minimum	°C	-5
• maximum	°C	45
• during storage / minimum permissible	°C	-40
• during storage / maximum permissible	°C	75

Certificates

Equipment marking

• acc. to DIN EN 61346-2	F
• acc. to DIN EN 81346-2	F

General Product Approval

Declaration of Conformity



CCC



IMQ



VDE

[sonstig](#)



EG-Konf.

Test Certificates

other

[sonstig](#)

[Umweltbestätigung](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5SM33440>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5SM33440/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SM33440

CAX-Online-Generator


<http://www.siemens.com/cax>

Tender specifications

<http://ausschreibungstexte.siemens.com/tiplv>

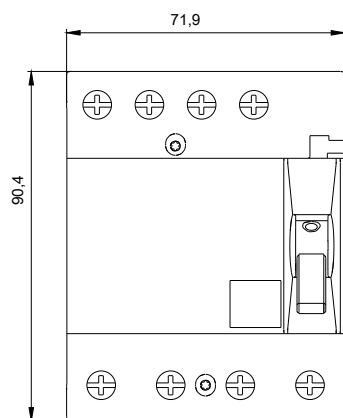

last modified:

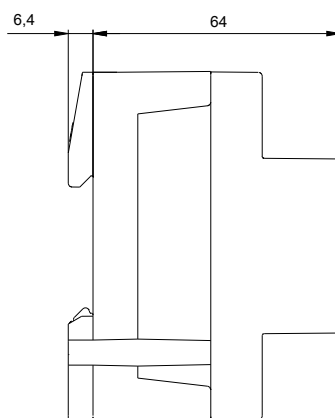

24.07.2015