

Pin busbar touch-safe, 16 mm² 3-phase+AUX, 1016 mm long can be cut, without end caps



Model		
product brand name	SENTRON	
product designation	Pin busbar	
design of the product	16 mm², 3PH+AS L1016mm	
General technical data		
phase number	3	
cross-section	16 mm²	
Main circuit		
operational current rated value	80 A	
Product details		
product feature insulated	Yes	
Connections		
type of electrical connection	Pin	
Mechanical Design		
width	15.8 mm	
length	1 016 mm	
net weight	591.81 g	
General Product Approval		Declaration of Conformity
		other

[Confirmation](#)

[Miscellaneous](#)



[Confirmation](#)

other

[Environmental Con-
firmations](#)

[Miscellaneous](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3712>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5ST3712>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3712

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

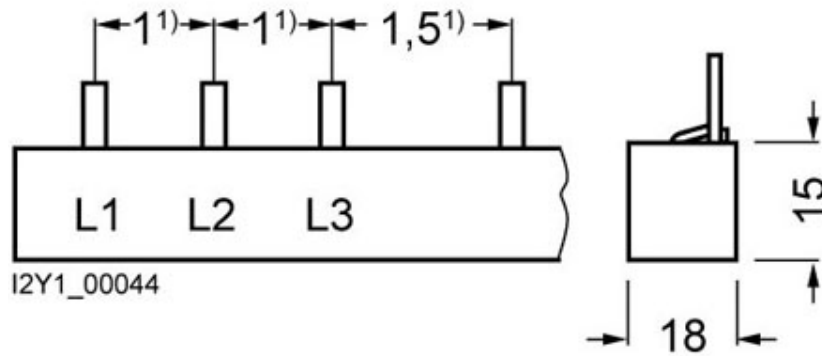

¹⁾ Pin spacings in MW (Modular widths, 1 MW = 18 mm).

