



Circuit breaker Universal current 440 V DC 400 V AC 10kA, 2-pole, C, 03A

| Model | |
|---|---------------------------------|
| product brand name | SENTRON |
| product designation | Miniature circuit breaker |
| General technical data | |
| number of poles | 2 |
| design of pole | 2P |
| tripping characteristic class | C |
| mechanical service life (operating cycles) typical | 10 000 |
| overvoltage category | III |
| degree of pollution | 3 |
| Voltage | |
| type of voltage of the operating voltage | AC/DC |
| insulation voltage (U _i) | |
| • at DC rated value | 250 V |
| • with single-phase operation at AC rated value | 440 V |
| • with multi-phase operation at AC rated value | 440 V |
| Supply voltage | |
| supply voltage | |
| • at AC rated value | 400 V |
| • at DC rated value | 440 V |
| value range of the supply voltage frequency | 50/60 Hz |
| operating voltage at DC rated value maximum | 500 V |
| Protection class | |
| protection class IP | IP20, with connected conductors |
| Switching capacity | |
| switching capacity current | |
| • at DC according to IEC 60947-2 rated value | 15 kA |
| • according to EN 60898 rated value | 10 kA |
| energy limitation class | 3 |
| Dissipation | |
| power loss [W] for rated value of the current at AC in hot operating state per pole | 1.3 W |
| Current | |
| operational current | |
| • at 35 °C rated value | 3 A |
| • at 40 °C rated value | 2.82 A |
| • at 45 °C rated value | 2.72 A |
| • at 50 °C rated value | 2.62 A |
| • at 55 °C rated value | 2.52 A |
| • at 60 °C rated value | 2.41 A |

| | |
|--|--|
| <ul style="list-style-type: none"> at AC rated value | 3 A |
| suitability for operation | universal current |
| Product details | |
| product component | |
| <ul style="list-style-type: none"> combined terminal top | Yes |
| <ul style="list-style-type: none"> combined terminal bottom | Yes |
| <ul style="list-style-type: none"> neutral conductor switching | No |
| product feature | |
| <ul style="list-style-type: none"> properties for main switches in accordance with EN 60204-1 | Yes |
| <ul style="list-style-type: none"> halogen-free | Yes |
| <ul style="list-style-type: none"> sealable | Yes |
| <ul style="list-style-type: none"> silicon-free | Yes |
| product extension installable supplementary devices | Yes |
| Short circuit | |
| short-circuit current breaking capacity (I _{cn}) | |
| <ul style="list-style-type: none"> at DC according to EN 60898-2 | 10 kA |
| Connections | |
| connectable conductor cross-section solid | |
| <ul style="list-style-type: none"> minimum | 0.75 mm ² |
| <ul style="list-style-type: none"> maximum | 35 mm ² |
| connectable conductor cross-section stranded | |
| <ul style="list-style-type: none"> minimum | 0.75 mm ² |
| <ul style="list-style-type: none"> maximum | 35 mm ² |
| connectable conductor cross-section finely stranded with core end processing | |
| <ul style="list-style-type: none"> minimum | 0.75 mm ² |
| <ul style="list-style-type: none"> maximum | 25 mm ² |
| AWG number as coded connectable conductor cross section | |
| <ul style="list-style-type: none"> minimum | 18 |
| <ul style="list-style-type: none"> maximum | 4 |
| tightening torque [lbf-in] with screw-type terminals | |
| <ul style="list-style-type: none"> minimum | 22 lbf-in |
| <ul style="list-style-type: none"> maximum | 31 lbf-in |
| tightening torque with screw-type terminals | |
| <ul style="list-style-type: none"> minimum | 2.5 N-m |
| <ul style="list-style-type: none"> maximum | 3.5 N-m |
| position of power supply cord | AC as required, observe DC polarity |
| Mechanical Design | |
| height | 90 mm |
| width | 36 mm |
| depth | 76 mm |
| installation depth | 70 mm |
| number of modular width units | 2 |
| fastening method | Quick assembly system |
| mounting position | any |
| net weight | 318 g |
| Environmental conditions | |
| influence of the surrounding temperature standard | max. 95% to 55°C, max. 55% to 70°C, max. 35% to 75°C IEC / EN 60898-2, UL1077 |
| vibration resistance according to IEC 60068-2-6 | ±1mm at 5 to 25Hz; 50m/s ² at 25 to 150Hz |
| ambient temperature during operation | |
| <ul style="list-style-type: none"> minimum | -40 °C |
| <ul style="list-style-type: none"> maximum | 70 °C |
| ambient temperature during storage | |
| <ul style="list-style-type: none"> minimum | -40 °C |
| <ul style="list-style-type: none"> maximum | 75 °C |
| number of test cycles for environmental testing according to IEC 60068-2-30 | 6 |
| General Product Approval | |



[Confirmation](#)



[Miscellaneous](#)



| | | | |
|---------------------------------|----------------------------------|--------------------------|--------------------------|
| General Product Approval | Declaration of Conformity | Test Certificates | Marine / Shipping |
|---------------------------------|----------------------------------|--------------------------|--------------------------|

[Miscellaneous](#)



[Special Test Certificate](#)

[Miscellaneous](#)



| | | |
|--------------|----------------|-----------------------|
| other | Railway | Dangerous Good |
|--------------|----------------|-----------------------|

[Environmental Confirmations](#)

[Miscellaneous](#)

[Confirmation](#)

[Vibration and Shock](#)

[Confirmation](#)

[Transport Information](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SY5203-7>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SY5203-7>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SY5203-7

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

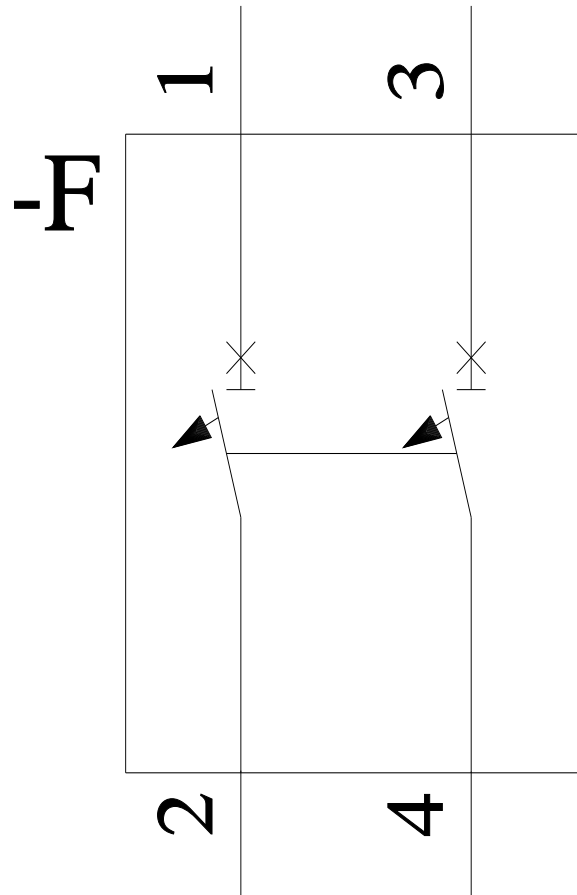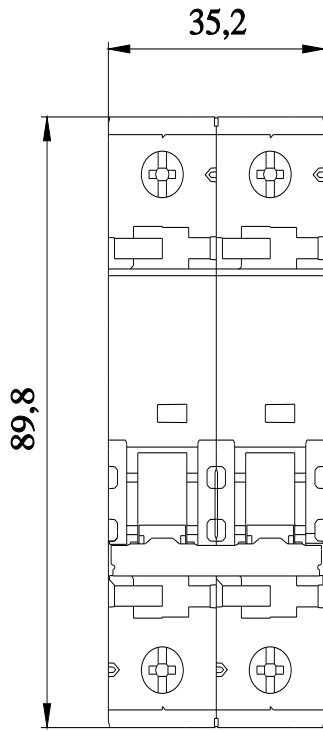

CB

