





SWITCH, D=70MM 32A 2NC, TERMINAL 50QMM



Similar to image

Technical data:		
Mounting depth	mm	70
Operating voltage / rated value	V	400
Operating current / rated value	A	32
type of voltage		AC
Number of poles		2
Breaking capacity current / rated value	kA	0.096
Resistance against short-circuit current	kA	10
Design of the switching function		Off switch
Number of pitch units for width		2
Number of NC contacts		0
Number of NO contacts		2
Number of change-over switches		0
Product component / Signal lamp		No
Product function / positive opening (acc. to DIN VDE 0113)		No

Certificates/approvals:

General Product Approval		Declaration of Conformity	Test Certificates	other
				<a href="#">Type Test Certificates/Test Report</a>
CCC	GOST	VDE	EG-Konf.	<a href="#">Environmental Confirmations</a>

#### Further information:

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

##### Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5TE8312/all>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5TE8312](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TE8312)

##### CAX-Online-Generator

<http://www.siemens.com/cax>

##### Tender specifications

[Datanorm](#) [GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

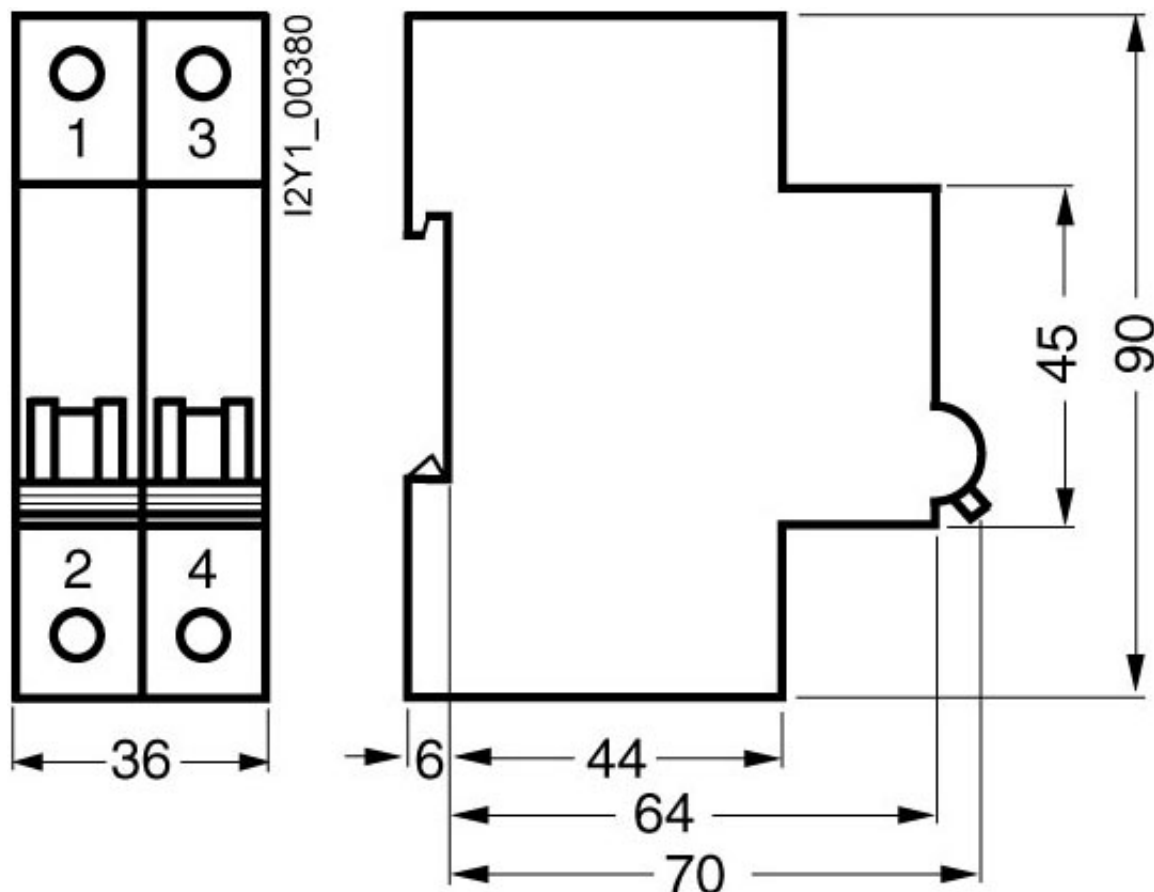

last change:

Mar 5, 2013