



Similar to image

### Technical data:

<b>Number of NC contacts</b>		1
<b>Number of NO contacts</b>		3
<b>Mounting depth</b>	mm	64
<b>Number of pitch units for width</b>		2
<b>Switching capacity real power / for filament lamp load</b>	W	1,500
<b>Type of voltage</b>		AC/DC
• for operating		AC/DC
• of the operating voltage		AC
<b>Control supply voltage / rated value</b>	V	230
<b>Operating current / rated value</b>	A	24
<b>Operating voltage / rated value</b>		
• minimum	V	440
• maximum	V	440
<b>Protection class IP</b>		IP20
<b>Product extension / can be installed / supplementary device</b>		Yes
<b>Product component / slide for manual operation</b>		No

### Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Global Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<http://support.automation.siemens.com/WW/view/en/5TT5731-0/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5TT5731-0](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TT5731-0)

Tender specifications

Datanorm [GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

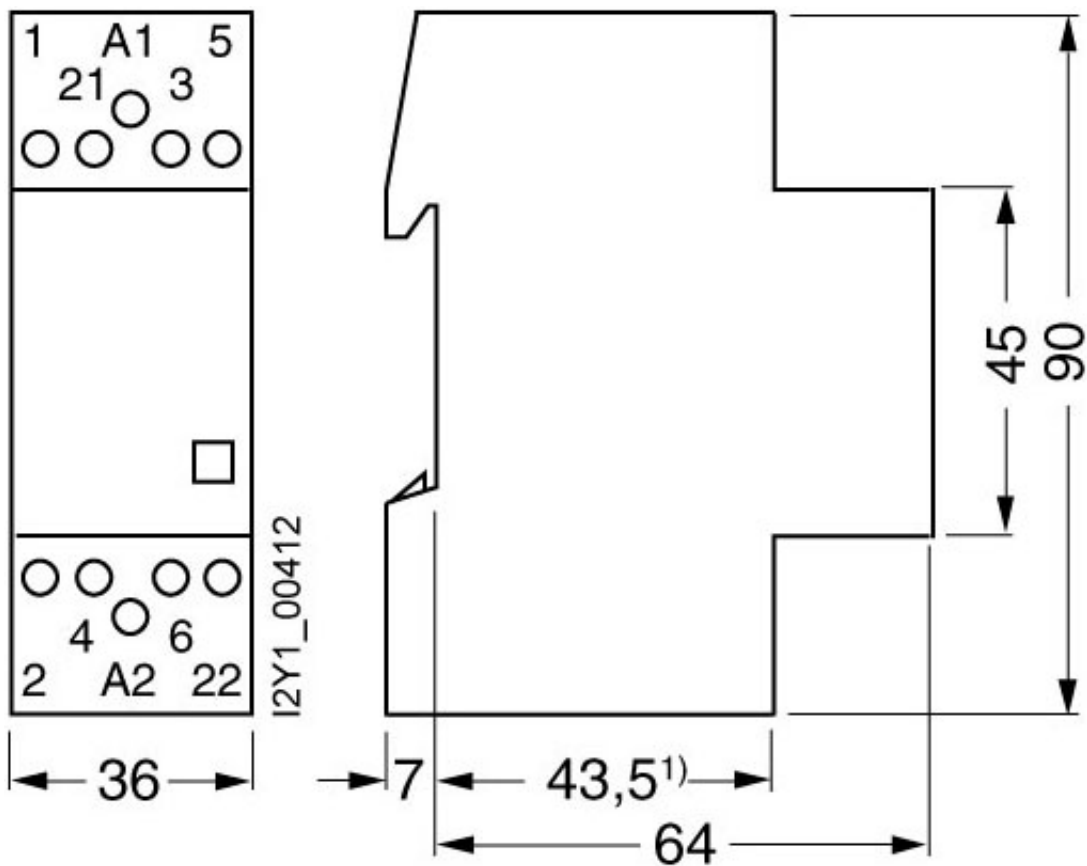

<sup>1)</sup> Dimension without sealable terminal cover.

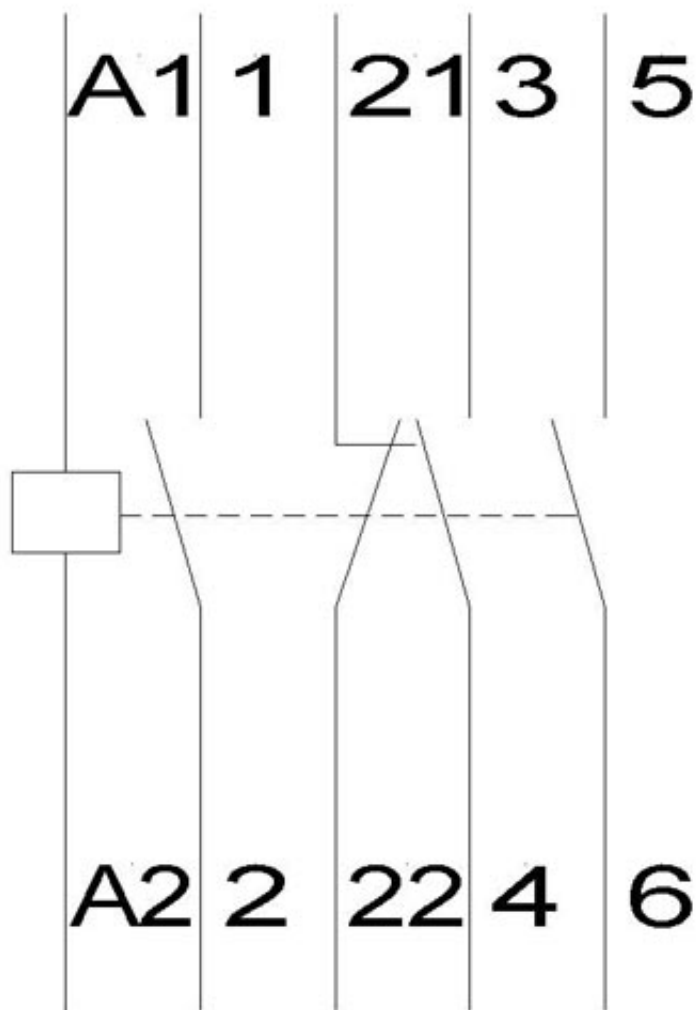

last change:

Nov 22, 2010