


Specifications

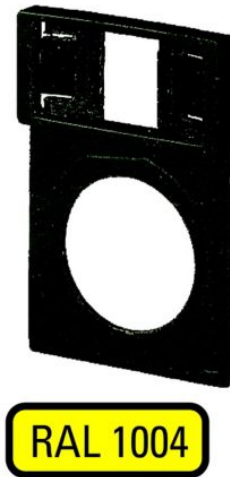

Eaton 063258

Eaton Moeller® series RMQ16 Label mount, yellow

General specifications

PRODUCT NAME	Eaton Moeller® series RMQ16 Accessory Label mount
CATALOG NUMBER	063258
EAN	4015080632580
PRODUCT LENGTH/DEPTH	1 mm
PRODUCT HEIGHT	38 mm
PRODUCT WIDTH	25 mm
PRODUCT WEIGHT	0.003 kg
CERTIFICATIONS	UL/CSA certification not required
MODEL CODE	Q25TGE-X

Features & Functions

COLOR	Yellow
FUNCTIONS	For additional marking of mounting locations in surface mounting enclosures or flush mounting panels in grid dimension 25 × 37.5 mm
RAL-NUMBER	1004
SHAPE	Rectangular

Climatic environmental conditions

AMBIENT OPERATING TEMPERATURE - MIN	-25 °C
AMBIENT OPERATING TEMPERATURE - MAX	60 °C

General

OPENING DIAMETER	16 mm
PRODUCT CATEGORY	Accessories

Communication

CONNECTION TO SMARTWIRE-DT	No
-----------------------------------	----

Design verification

EQUIPMENT HEAT DISSIPATION, CURRENT-DEPENDENT PVID 0 W

HEAT DISSIPATION CAPACITY PDISS 0 W

HEAT DISSIPATION PER POLE, CURRENT-DEPENDENT PVID 0 W

RATED OPERATIONAL CURRENT FOR SPECIFIED HEAT DISSIPATION (IN) 0 A

STATIC HEAT DISSIPATION, NON-CURRENT-DEPENDENT PVS 0 W

10.2.2 CORROSION RESISTANCE Meets the product standard's requirements.

10.2.3.1 VERIFICATION OF THERMAL STABILITY OF ENCLOSURES Meets the product standard's requirements.

10.2.3.2 VERIFICATION OF RESISTANCE OF INSULATING MATERIALS TO NORMAL HEAT Meets the product standard's requirements.

10.2.3.3 RESIST. OF INSUL. MAT. TO ABNORMAL HEAT/FIRE BY INTERNAL ELECT. EFFECTS Meets the product standard's requirements.

10.2.4 RESISTANCE TO ULTRA-VIOLET (UV) RADIATION Please enquire

10.2.5 LIFTING Does not apply, since the entire switchgear needs to be evaluated.

10.2.6 MECHANICAL IMPACT Does not apply, since the entire switchgear needs to be evaluated.

10.2.7 INSCRIPTIONS Meets the product standard's requirements.

10.3 DEGREE OF PROTECTION OF ASSEMBLIES Does not apply, since the entire switchgear needs to be evaluated.

10.4 CLEARANCES AND CREEPAGE DISTANCES Meets the product standard's requirements.

10.5 PROTECTION AGAINST ELECTRIC SHOCK Does not apply, since the entire switchgear needs to be evaluated.

Resources

[eaton-rmq-titan-brochure-br047004en-en-us.pdf](#)

CATALOGUES

[eaton-pushbuttons-signal-towers-sensors-assortment-overview-catalog-ca047003en-en-us.pdf](#)

DECLARATIONS OF CONFORMITY

[DA-DC-00004158.pdf](#)

[DA-DC-00004136.pdf](#)

DRAWINGS

[eaton-operating-label-rmq16-accessory-dimensions.eps](#)

[eaton-operating-button-symbol-008.eps](#)

INSTALLATION INSTRUCTIONS

[IL04716016Z](#)

MCAD MODEL

[DA-CD-schild_o](#)

[DA-CS-schild_o](#)

10.6 INCORPORATION OF SWITCHING DEVICES AND COMPONENTS	Does not apply, since the entire switchgear needs to be evaluated.
10.7 INTERNAL ELECTRICAL CIRCUITS AND CONNECTIONS	Is the panel builder's responsibility.
10.8 CONNECTIONS FOR EXTERNAL CONDUCTORS	Is the panel builder's responsibility.
10.9.2 POWER-FREQUENCY ELECTRIC STRENGTH	Is the panel builder's responsibility.
10.9.3 IMPULSE WITHSTAND VOLTAGE	Is the panel builder's responsibility.
10.9.4 TESTING OF ENCLOSURES MADE OF INSULATING MATERIAL	Is the panel builder's responsibility.
10.10 TEMPERATURE RISE	Not applicable.
10.11 SHORT-CIRCUIT RATING	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 ELECTROMAGNETIC COMPATIBILITY	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 MECHANICAL FUNCTION	The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

PROJECT NAME:

PROJECT NUMBER:

PREPARED BY:

DATE: