


Specifications

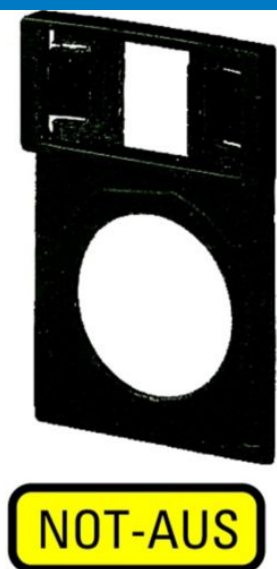

Eaton 063260

Eaton Moeller® series RMQ16 Carrier,
+label, emergency switching off

General specifications

PRODUCT NAME	Eaton Moeller® series RMQ16 Accessory Emergency-Stop label
CATALOG NUMBER	063260
EAN	4015080632603
PRODUCT LENGTH/DEPTH	1 mm
PRODUCT HEIGHT	38 mm
PRODUCT WIDTH	25 mm
PRODUCT WEIGHT	0.003 kg
CERTIFICATIONS	UL/CSA certification not required
MODEL CODE	Q25TGE-199

Features & Functions

COLOR Yellow

INSCRIPTION Other

SHAPE Rectangular

Climatic environmental conditions

**AMBIENT OPERATING
TEMPERATURE - MIN** -25 °C

**AMBIENT OPERATING
TEMPERATURE - MAX** 60 °C

General

PRODUCT CATEGORY Accessories

Communication

**CONNECTION TO
SMARTWIRE-DT** No

Design verification

EQUIPMENT HEAT DISSIPATION, CURRENT-DEPENDENT PVID 0 W

HEAT DISSIPATION CAPACITY PDISS 0 W

HEAT DISSIPATION PER POLE, CURRENT-DEPENDENT PVID 0 W

RATED OPERATIONAL CURRENT FOR SPECIFIED HEAT DISSIPATION (IN) 0 A

STATIC HEAT DISSIPATION, NON-CURRENT-DEPENDENT PVS 0 W

10.2.2 CORROSION RESISTANCE Meets the product standard's requirements.

10.2.3.1 VERIFICATION OF THERMAL STABILITY OF ENCLOSURES Meets the product standard's requirements.

10.2.3.2 VERIFICATION OF RESISTANCE OF INSULATING MATERIALS TO NORMAL HEAT Meets the product standard's requirements.

10.2.3.3 RESIST. OF INSUL. MAT. TO ABNORMAL HEAT/FIRE BY INTERNAL ELECT. EFFECTS Meets the product standard's requirements.

10.2.4 RESISTANCE TO ULTRA-VIOLET (UV) RADIATION Please enquire

10.2.5 LIFTING Does not apply, since the entire switchgear needs to be evaluated.

10.2.6 MECHANICAL IMPACT Does not apply, since the entire switchgear needs to be evaluated.

10.2.7 INSCRIPTIONS Meets the product standard's requirements.

10.3 DEGREE OF PROTECTION OF ASSEMBLIES Does not apply, since the entire switchgear needs to be evaluated.

10.4 CLEARANCES AND CREEPAGE DISTANCES Meets the product standard's requirements.

10.5 PROTECTION AGAINST ELECTRIC SHOCK Does not apply, since the entire switchgear needs to be evaluated.

Resources

[eaton-rmq-titan-brochure-br047004en-en-us.pdf](#)

CATALOGUES

[eaton-pushbuttons-signal-towers-sensors-assortment-overview-catalog-ca047003en-en-us.pdf](#)

DECLARATIONS OF CONFORMITY

[DA-DC-00004158.pdf](#)

[DA-DC-00004136.pdf](#)

DRAWINGS

[eaton-operating-label-rmq16-accessory-dimensions.eps](#)

[eaton-operating-button-rmq16-accessory-symbol-006.eps](#)

INSTALLATION INSTRUCTIONS

[IL04716016Z](#)

MCAD MODEL

[DA-CD-schild t](#)

[DA-CS-schild t](#)

10.6 INCORPORATION OF SWITCHING DEVICES AND COMPONENTS	Does not apply, since the entire switchgear needs to be evaluated.
10.7 INTERNAL ELECTRICAL CIRCUITS AND CONNECTIONS	Is the panel builder's responsibility.
10.8 CONNECTIONS FOR EXTERNAL CONDUCTORS	Is the panel builder's responsibility.
10.9.2 POWER-FREQUENCY ELECTRIC STRENGTH	Is the panel builder's responsibility.
10.9.3 IMPULSE WITHSTAND VOLTAGE	Is the panel builder's responsibility.
10.9.4 TESTING OF ENCLOSURES MADE OF INSULATING MATERIAL	Is the panel builder's responsibility.
10.10 TEMPERATURE RISE	Not applicable.
10.11 SHORT-CIRCUIT RATING	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 ELECTROMAGNETIC COMPATIBILITY	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 MECHANICAL FUNCTION	The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

PROJECT NAME:

PROJECT NUMBER:

PREPARED BY:

DATE:



Eaton Corporation plc

Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

Follow us on social media to get the latest product and support information.



© 2025 Eaton. All Rights Reserved.