

MLFB-Ordering data

6SL3517-1BE16-3AM0



Figure similar

Client order no. :

Order no. :

Offer no. :

Remarks :

Item no. :

Consignment no. :

Project :

Rated data	General tech. specifications																																
Input <table> <tr> <td>Number of phases</td><td>3 AC</td></tr> <tr> <td>Line voltage</td><td>380 ... 480 V ± 10 %</td></tr> <tr> <td>Line frequency</td><td>47 ... 63 Hz</td></tr> <tr> <td>Rated current (HO)</td><td>5.30 A</td></tr> </table>	Number of phases	3 AC	Line voltage	380 ... 480 V ± 10 %	Line frequency	47 ... 63 Hz	Rated current (HO)	5.30 A	<table> <tr> <td>Power factor λ</td><td>0.95</td></tr> <tr> <td>Offset factor $\cos \varphi$</td><td>0.95</td></tr> <tr> <td>Efficiency η</td><td>0.98</td></tr> <tr> <td>Power loss</td><td>0.053 kW</td></tr> </table>	Power factor λ	0.95	Offset factor $\cos \varphi$	0.95	Efficiency η	0.98	Power loss	0.053 kW																
Number of phases	3 AC																																
Line voltage	380 ... 480 V ± 10 %																																
Line frequency	47 ... 63 Hz																																
Rated current (HO)	5.30 A																																
Power factor λ	0.95																																
Offset factor $\cos \varphi$	0.95																																
Efficiency η	0.98																																
Power loss	0.053 kW																																
Output <table> <tr> <td>Number of phases</td><td>3 AC</td></tr> <tr> <td>Rated voltage</td><td>400 V</td></tr> <tr> <td>Rated power (HO)</td><td>2.20 kW / 3.00 hp</td></tr> <tr> <td>Rated current (HO)</td><td>5.60 A</td></tr> <tr> <td>Max. output voltage</td><td>0 ... 87 % Input voltage</td></tr> <tr> <td>Max. output current</td><td>11.20 A</td></tr> <tr> <td>Pulse frequency</td><td>4 kHz</td></tr> <tr> <td>Output frequency for vector control</td><td>0 ... 200 Hz</td></tr> <tr> <td>Output frequency for V/f control</td><td>0 ... 550 Hz</td></tr> </table> <p>In firmware V4.7 and higher, due to legal requirements, the maximum output frequency is restricted to 550 Hz.</p>	Number of phases	3 AC	Rated voltage	400 V	Rated power (HO)	2.20 kW / 3.00 hp	Rated current (HO)	5.60 A	Max. output voltage	0 ... 87 % Input voltage	Max. output current	11.20 A	Pulse frequency	4 kHz	Output frequency for vector control	0 ... 200 Hz	Output frequency for V/f control	0 ... 550 Hz	Ambient conditions <table> <tr> <td>Cooling</td><td>Forced ventilation</td></tr> <tr> <td>Cooling air requirement</td><td>0.0240 m³/s</td></tr> <tr> <td>Installation altitude</td><td>1000 m</td></tr> </table> Ambient temperature <table> <tr> <td>Operation</td><td>-10 ... 40 °C (14 ... 104 °F)</td></tr> <tr> <td>Transport</td><td>-40 ... 70 °C (-40 ... 158 °F)</td></tr> <tr> <td>Storage</td><td>-40 ... 70 °C (-40 ... 158 °F)</td></tr> </table> Relative humidity <table> <tr> <td>Max. operation</td><td>95 % RH, condensation not permitted</td></tr> </table>	Cooling	Forced ventilation	Cooling air requirement	0.0240 m ³ /s	Installation altitude	1000 m	Operation	-10 ... 40 °C (14 ... 104 °F)	Transport	-40 ... 70 °C (-40 ... 158 °F)	Storage	-40 ... 70 °C (-40 ... 158 °F)	Max. operation	95 % RH, condensation not permitted
Number of phases	3 AC																																
Rated voltage	400 V																																
Rated power (HO)	2.20 kW / 3.00 hp																																
Rated current (HO)	5.60 A																																
Max. output voltage	0 ... 87 % Input voltage																																
Max. output current	11.20 A																																
Pulse frequency	4 kHz																																
Output frequency for vector control	0 ... 200 Hz																																
Output frequency for V/f control	0 ... 550 Hz																																
Cooling	Forced ventilation																																
Cooling air requirement	0.0240 m ³ /s																																
Installation altitude	1000 m																																
Operation	-10 ... 40 °C (14 ... 104 °F)																																
Transport	-40 ... 70 °C (-40 ... 158 °F)																																
Storage	-40 ... 70 °C (-40 ... 158 °F)																																
Max. operation	95 % RH, condensation not permitted																																

Overload capability

High Overload (HO)

2 × rated output current during 3 s, followed by 1.5 × rated output current during 57 s, during a cycle time of 300 s (110 % on average)

SIEMENS

Data sheet for SINAMICS G110M Power Module PM240M

MLFB-Ordering data 6SL3517-1BE16-3AM0

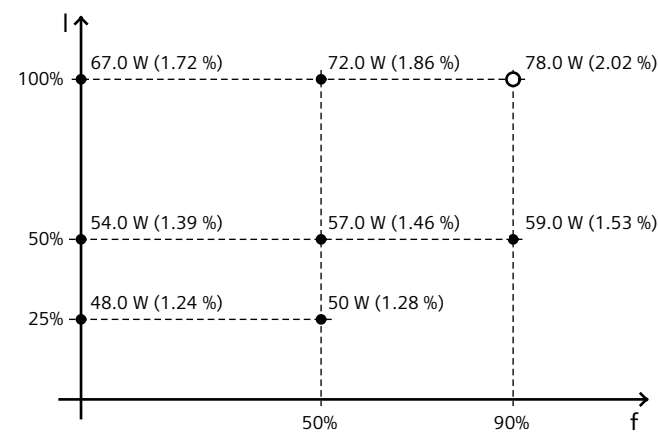


Figure similar

Mechanical data		Standards	
Degree of protection	IP66	Compliance with standards	UL, cUL, CE, C-Tick (RCM)
Size	FSB		
Net weight	3.40 kg	CE marking	Low-voltage directive 2006/95/EC
Width	181.0 mm		
Height	135.0 mm		
Depth	309.0 mm		

Converter losses to EN 50598-2*	
Efficiency class	IE2

Comparison with the reference converter (90% / 100%) -71.94 %



The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard EN 50598) of the relative torque generating current (I) over the relative motor stator frequency(f). The values are valid for the basic version of the converter without options/components.

*converted values