



Flashlight element, with integrated LED, clear, 115 V AC, Diameter 50 mm

|                                                      |                              |     |                           |
|------------------------------------------------------|------------------------------|-----|---------------------------|
| product brand name                                   | SIRIUS                       |     |                           |
| product designation                                  | Repeated-flash light element |     |                           |
| design of the product                                | including light sources      |     |                           |
| General technical data                               |                              |     |                           |
| type of voltage of the operating voltage             | AC                           |     |                           |
| operating voltage                                    |                              |     |                           |
| • 1 at AC at 50 Hz rated value                       | 115 V                        |     |                           |
| • 1 at AC at 60 Hz rated value                       | 115 V                        |     |                           |
| relative positive tolerance of the operating voltage | 10 %                         |     |                           |
| relative negative tolerance of the operating voltage | -10 %                        |     |                           |
| consumed current maximum                             | 25 mA                        |     |                           |
| reference code according to EN 61346-2               | P                            |     |                           |
| Lamp                                                 |                              |     |                           |
| product component light source                       | Yes                          |     |                           |
| type of light source                                 | LED                          |     |                           |
| service life of LED                                  | 100 000 h                    |     |                           |
| design of the optical signal                         | blinklight                   |     |                           |
| light intensity                                      | 3.02 cd                      |     |                           |
| light intensity                                      | 1.84 ... 4.49 cd             |     |                           |
| flashing frequency                                   | 1 Hz                         |     |                           |
| Enclosure                                            |                              |     |                           |
| height                                               | 67 mm                        |     |                           |
| width                                                | 52 mm                        |     |                           |
| outer diameter of the signal column element          | 50 mm                        |     |                           |
| material                                             | PC                           |     |                           |
| color                                                | clear                        |     |                           |
| fastening method                                     | Bayonet                      |     |                           |
| protection class IP                                  | IP54                         |     |                           |
| Ambient conditions                                   |                              |     |                           |
| ambient temperature during operation                 | -20 ... +50 °C               |     |                           |
| Certificates/ approvals                              |                              |     |                           |
| General Product Approval                             |                              | EMC | Declaration of Conformity |

[Confirmation](#)



other

[Confirmation](#)

#### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WD4240-5BE>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=8WD4240-5BE>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/8WD4240-5BE>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=8WD4240-5BE&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=8WD4240-5BE&lang=en)

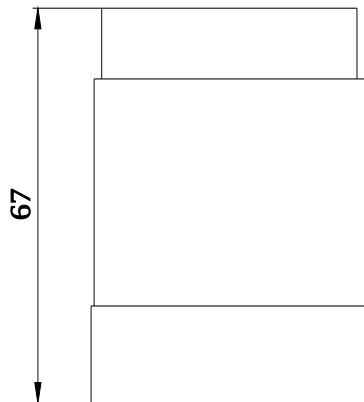

**-P**

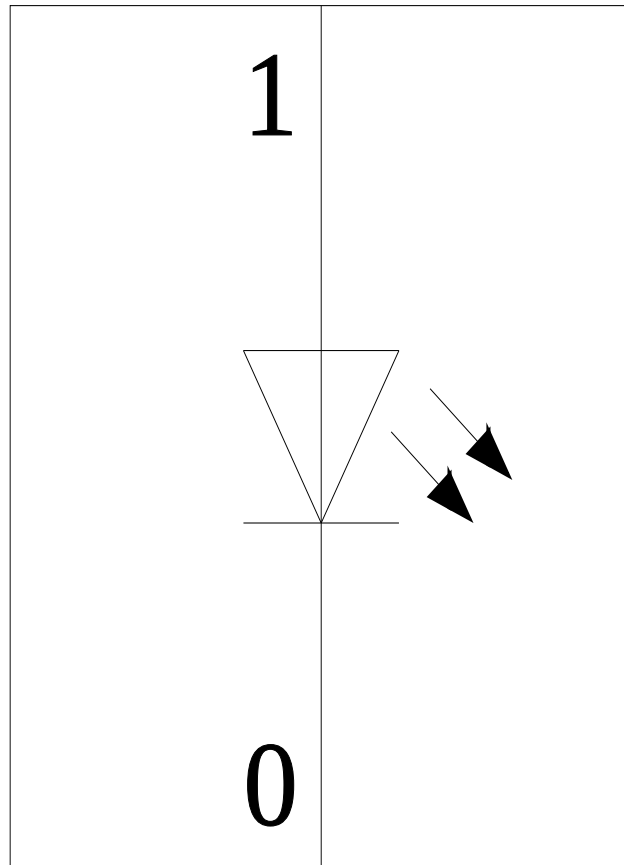

last modified:

12/23/2020 