



Continuous light element, blue, 12-230 V AC/DC, 70 mm diameter, base BA 15d without light element

product brand name	SIRIUS
product designation	Continuous light element
design of the product	without light source

General technical data

type of voltage of the operating voltage	AC/DC
operating voltage	
• at DC rated value	12 ... 230 V
• at AC at 50 Hz rated value	12 ... 230 V
• at AC at 60 Hz rated value	12 ... 230 V
reference code according to EN 61346-2	P

Lamp

product component light source	No
type of light source	filament lamp / LED
design of the optical signal	continuous light
light intensity	0.32 cd
light intensity	0.25 ... 0.42 cd
socket design	BA 15d

Enclosure

height	65.5 mm
width	70 mm
outer diameter of the signal column element	70 mm
material	PC
color	blue
fastening method	Bayonet
protection class IP	IP65

Ambient conditions

ambient temperature during operation	-20 ... +60 °C
--------------------------------------	----------------

Certificates/ approvals

General Product Approval

EMC

Declaration of Conformity

[Confirmation](#)



other

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WD4400-1AF>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=8WD4400-1AF>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/8WD4400-1AF>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=8WD4400-1AF&lang=en

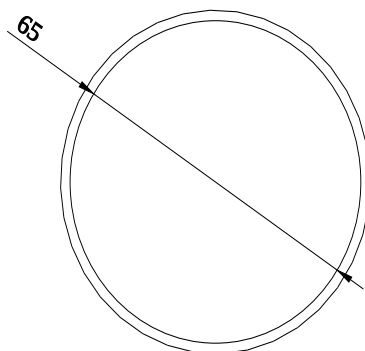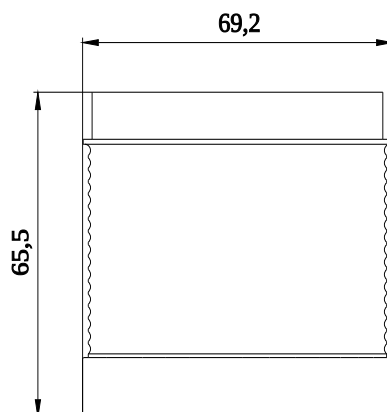

-P

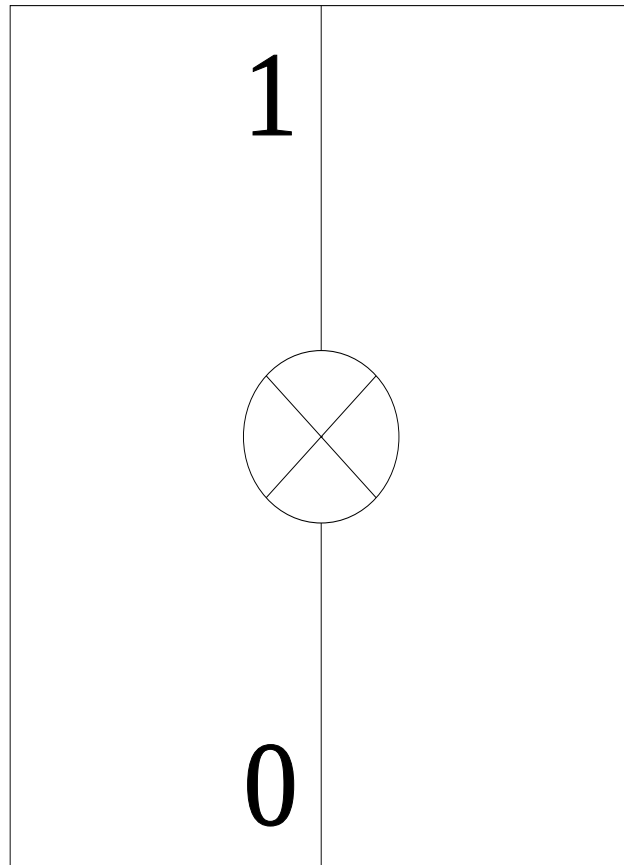

last modified:

2/25/2021 