



AS-Interface adapter element, black, with/without external auxiliary voltage, can be selected, standard AS-i, for 4 signaling elements, 24 V DC, Diameter 70 mm

product brand name		SIRIUS	
product designation		AS-Interface module	
General technical data			
type of voltage of the operating voltage		DC	
operating voltage		18.5 ... 31.6 V	
• at DC rated value		24 V	
• 1 at DC rated value		210 mA	
consumed current maximum		B	
reference code according to EN 61346-2			
Communication			
design of the interface AS-Interface protocol		Yes	
Enclosure			
height		65.5 mm	
width		70 mm	
outer diameter of the signal column element		70 mm	
material		PC	
color		black	
fastening method		Bayonet	
protection class IP		IP65	
Ambient conditions			
ambient temperature during operation		-20 ... +50 °C	
Certificates/ approvals			
General Product Approval		EMC	Declaration of Conformity

[Confirmation](#)



other

[Confirmation](#)

Further information
Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WD4428-0BE>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=8WD4428-0BE>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/8WD4428-0BE>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=8WD4428-0BE&lang=en

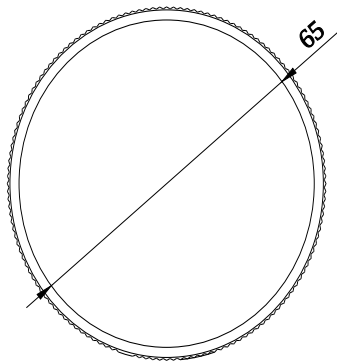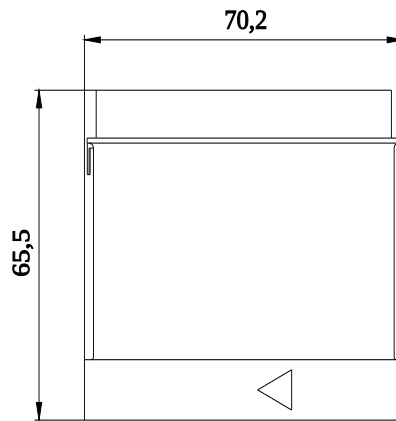

-B

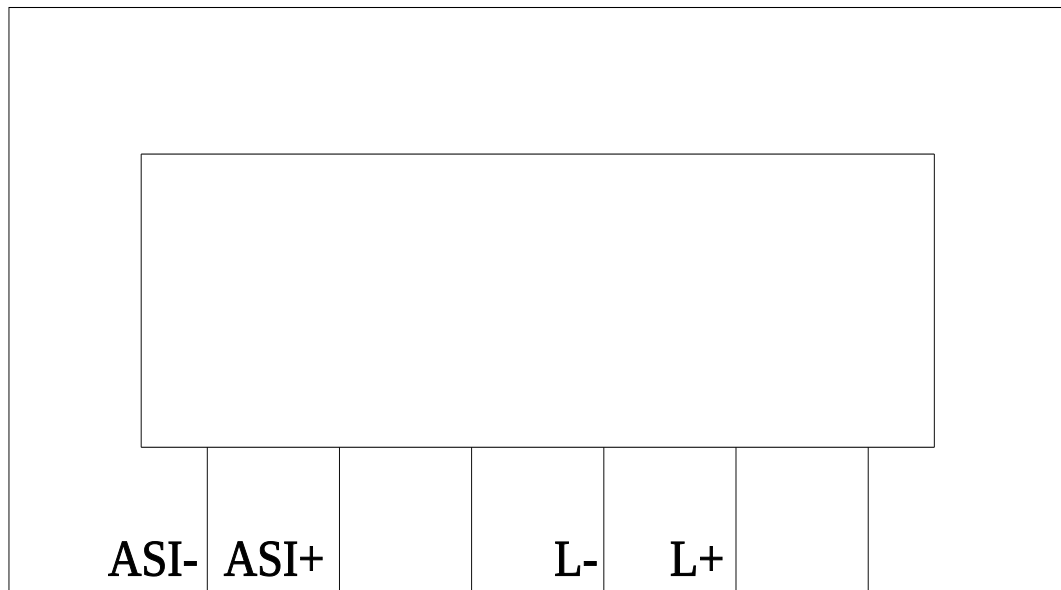

last modified:

12/23/2020 