

LED, Base BA 15d, yellow, 24 V AC/DC, accessory for signaling columns, with diameters 50 mm and 70 mm



Figure similar

|                                                      |                |                                                                                     |                                                                                     |                                                                                     |                                                                                       |                                                                                       |  |
|------------------------------------------------------|----------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|--|
| product brand name                                   | SIRIUS         |                                                                                     |                                                                                     |                                                                                     |                                                                                       |                                                                                       |  |
| product designation                                  | LED            |                                                                                     |                                                                                     |                                                                                     |                                                                                       |                                                                                       |  |
| General technical data                               |                |                                                                                     |                                                                                     |                                                                                     |                                                                                       |                                                                                       |  |
| type of voltage of the operating voltage             | AC/DC          |                                                                                     |                                                                                     |                                                                                     |                                                                                       |                                                                                       |  |
| operating voltage                                    |                |                                                                                     |                                                                                     |                                                                                     |                                                                                       |                                                                                       |  |
| • 1 at DC rated value                                | 24 V           |                                                                                     |                                                                                     |                                                                                     |                                                                                       |                                                                                       |  |
| • 1 at AC at 50 Hz rated value                       | 24 V           |                                                                                     |                                                                                     |                                                                                     |                                                                                       |                                                                                       |  |
| • 1 at AC at 60 Hz rated value                       | 24 V           |                                                                                     |                                                                                     |                                                                                     |                                                                                       |                                                                                       |  |
| relative positive tolerance of the operating voltage | 10 %           |                                                                                     |                                                                                     |                                                                                     |                                                                                       |                                                                                       |  |
| relative negative tolerance of the operating voltage | -15 %          |                                                                                     |                                                                                     |                                                                                     |                                                                                       |                                                                                       |  |
| consumed current maximum                             | 16 mA          |                                                                                     |                                                                                     |                                                                                     |                                                                                       |                                                                                       |  |
| reference code according to EN 61346-2               | P              |                                                                                     |                                                                                     |                                                                                     |                                                                                       |                                                                                       |  |
| Lamp                                                 |                |                                                                                     |                                                                                     |                                                                                     |                                                                                       |                                                                                       |  |
| type of light source                                 | LED            |                                                                                     |                                                                                     |                                                                                     |                                                                                       |                                                                                       |  |
| light intensity                                      | 0.4 cd         |                                                                                     |                                                                                     |                                                                                     |                                                                                       |                                                                                       |  |
| socket design                                        | BA 15d         |                                                                                     |                                                                                     |                                                                                     |                                                                                       |                                                                                       |  |
| Enclosure                                            |                |                                                                                     |                                                                                     |                                                                                     |                                                                                       |                                                                                       |  |
| height                                               | 45 mm          |                                                                                     |                                                                                     |                                                                                     |                                                                                       |                                                                                       |  |
| width                                                | 20 mm          |                                                                                     |                                                                                     |                                                                                     |                                                                                       |                                                                                       |  |
| outer diameter of the signal column element          | 70 mm          |                                                                                     |                                                                                     |                                                                                     |                                                                                       |                                                                                       |  |
| color                                                | yellow         |                                                                                     |                                                                                     |                                                                                     |                                                                                       |                                                                                       |  |
| Ambient conditions                                   |                |                                                                                     |                                                                                     |                                                                                     |                                                                                       |                                                                                       |  |
| ambient temperature during operation                 | -20 ... +60 °C |                                                                                     |                                                                                     |                                                                                     |                                                                                       |                                                                                       |  |
| Certificates/ approvals                              |                |                                                                                     |                                                                                     |                                                                                     |                                                                                       |                                                                                       |  |
| General Product Approval                             |                | EMC                                                                                 | Declaration of Conformity                                                           |                                                                                     |                                                                                       |                                                                                       |  |
| <a href="#">Confirmation</a>                         |                |  |  |  |  |  |  |
| UL                                                   |                | RCM                                                                                 |                                                                                     | UKCA                                                                                |                                                                                       | EG-Konf.                                                                              |  |
| other                                                |                |                                                                                     |                                                                                     |                                                                                     |                                                                                       |                                                                                       |  |
| <a href="#">Confirmation</a>                         |                |                                                                                     |                                                                                     |                                                                                     |                                                                                       |                                                                                       |  |

## Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WD4428-6XD>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=8WD4428-6XD>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/8WD4428-6XD>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=8WD4428-6XD&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=8WD4428-6XD&lang=en)

**-P**

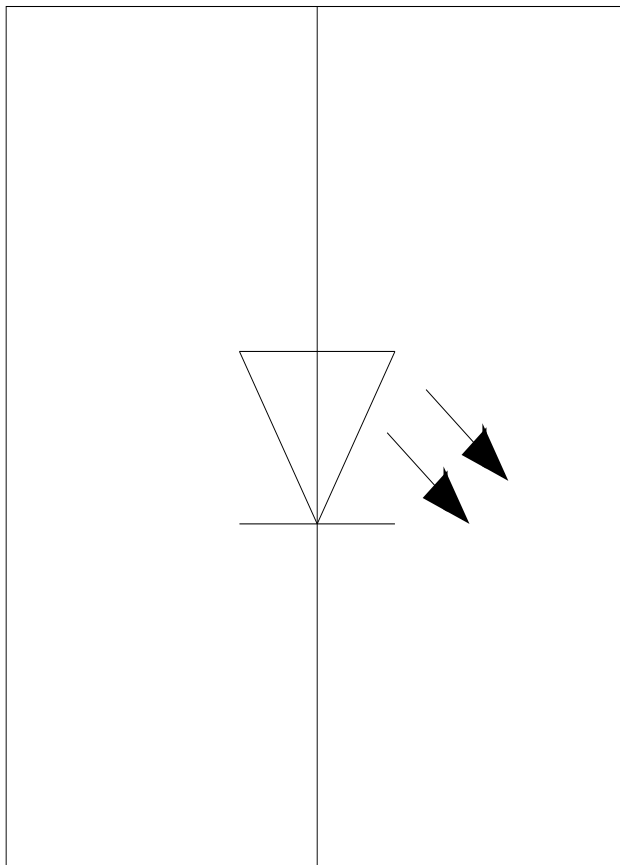

last modified:

12/23/2020 