

# Product data sheet

Specifications



Head for joystick controller, Harmony 9001K, metal, 30mm, 4 directions, spring return with latch to center

9001K34

Product availability: Stock - Normally stocked in distribution facility

**Price\*: 309.00 USD**

## Main

Range Of Product	Harmony 9001K
Product Or Component Type	Head for joystick controller
Device Short Name	9001K
Sale Per Indivisible Quantity	1
Type Of Operator	spring return with latch
Operator Profile	80 mm long operating shaft

## Complementary

Bezel Material	Metal
Mounting Diamete	1.18 in (30 mm)
Net Weight	0.82 lb(US) (0.372 kg)
Operating Position	Any position
Shape Of Signaling Unit Head	Octagonal
Contacts Type And Composition	Without contact block
Device Presentation	Basic element
Operator Direction Information	4 directions
Type Of Operator	Spring return with latch
Size	30 mm
Return	To centre

## Environment

Protective Treatment	TC
Ambient Air Temperature For Storage	-40...158 °F (-40...70 °C)
Ambient Air Temperature For Operation	-13...158 °F (-25...70 °C)
Overvoltage Category	II IEC 61140
Ip Degree Of Protection	IP66 IEC 60529

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

<b>Nema Degree Of Protection</b>	NEMA 1 NEMA 12 NEMA 13 NEMA 2 NEMA 3 NEMA 3R NEMA 4
<b>Standards</b>	IEC 60947-5-1 UL 508 IEC 60947-5-4 JIS C8201-5-1 JIS C 852 IEC 60947-1 CSA C22.2 No 14 JIS C8201-1
<b>Product Certifications</b>	NEMA UL 508
<b>Vibration Resistance</b>	7 gn 2...500 Hz)IEC 60068-2-6
<b>Shock Resistance</b>	50 gn IEC 60068-2-27

## Ordering and shipping details

<b>Category</b>	US10CS121426
<b>Discount Schedule</b>	0CS1
<b>Gtin</b>	785901077138
<b>Returnability</b>	Yes
<b>Country Of Origin</b>	MX

## Packing Units

<b>Unit Type Of Package 1</b>	PCE
<b>Number Of Units In Package 1</b>	1
<b>Package 1 Height</b>	1.60 in (4.064 cm)
<b>Package 1 Width</b>	2.00 in (5.08 cm)
<b>Package 1 Length</b>	5.20 in (13.208 cm)
<b>Package 1 Weight</b>	8.64 oz (244.94 g)

## Contractual warranty

<b>Warranty</b>	18 months
-----------------	-----------

## Sustainability

**Green Premium™ label** is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)

## Well-being performance

 Mercury Free

 Rohs Exemption Information [Yes](#)

**Reach Regulation** [REACH Declaration](#)

**Eu Rohs Directive** Pro-active compliance (Product out of EU RoHS legal scope)

**China Rohs Regulation** [China RoHS declaration](#)

**Weee** The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.


**California Proposition 65** WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

Mounting and Clearance

Contact Block Mounting Position

---


Top and Rear views

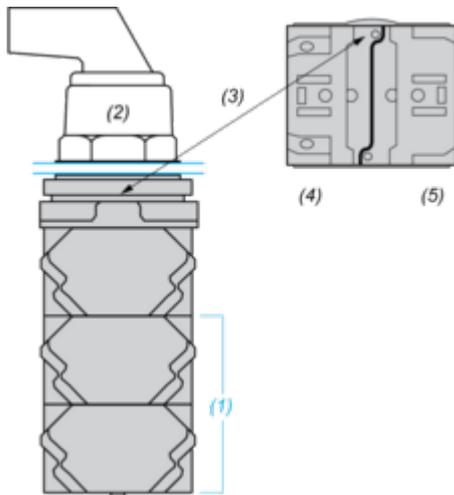

- (1) It is possible to mount up to 3 levels of contacts blocks (maximum of 6 contacts blocks)
- (2) Operator
- (3) Locating notch
- (4) Side 1
- (5) Side 2

Panel Cut-Out


Clearance

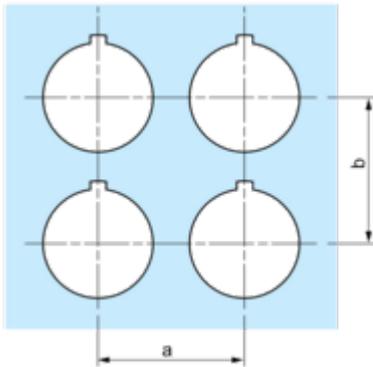

Legend plate	a min.		b min.	
	mm	in.	mm	in.
9001KN2••	57.2	2.25	44.5	1.75
9001KN3••	57.2	2.25	50.8	2.00

Individual Cut-outs Details

2 alternatives

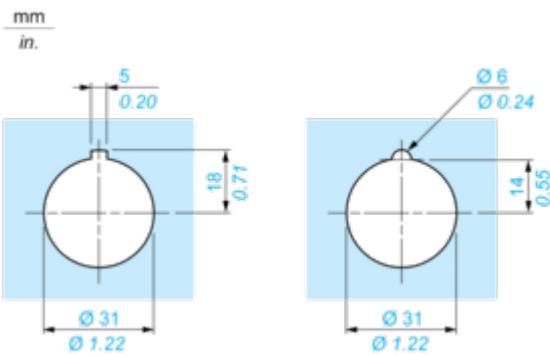

Technical Description

Joystick Positions

---

