





Timer, Harmony 9050 JCK, multifunction, programmable, 0.5 second to 999 hours, 10A, 240V AC, 24V AC/DC

9050JCK70V14

Product availability: Stock - Normally stocked in distribution facility

Price\*: 173.00 USD

### Main

Product Range	9050JCK
Product Type	Timer
Timing Mode	Watchdog
	On-delay and off-delay
	One shot falling edge
	One shot
	Trigger on-delay
	Off-delay
	On-delay
	Interval
	Repeat cycle
Timing Range	0.199.9 h
	0.059.99 s
	0.199.9 min
	1999 h
	1999 s
	1999 min
Supply Voltage	24 V AC

### Complementary

Power Consumption	3 VA	
Current Rating	10 A	
Switch Function	DPDT	
Contact Composition	2 NO + 2 NC	
Contact Material	Silver nickel	
Maximum Switching Voltage	240 V AC	
Mounting Type	Socket	
Number Of Pins	11	
Shape Of Pins	Tubular	
For Use With	8501NR62 8501NR61	

### **Environment**

Certifications	UL Recognized CE UL Listed
Ambient Temperature Range - Operational	-18150 °F (-2866 °C)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Height	2.36 in (60 mm)
Width	1.73 in (44 mm)
Depth	3 58 in (91 mm)

# Ordering and shipping details

Category	US10CP221652
Discount Schedule	0CP2
Gtin	785901053897
Returnability	Yes
Country Of Origin	US

# **Packing Units**

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	1.90 in (4.826 cm)
Package 1 Width	2.50 in (6.35 cm)
Package 1 Length	4.30 in (10.922 cm)
Package 1 Weight	4.48 oz (127.006 g)

# **Contractual warranty**

Warranty 18 months



**Green Premium**<sup>TM</sup> **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

## Well-being performance


<b>⊘</b>	Reach Free Of Svhc	
<b>⊘</b>	Toxic Heavy Metal Free	
<b>⊘</b>	Mercury Free	
<b>⊘</b>	Rohs Exemption Information	Yes

## **Certifications & Standards**

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information


## **Dimensions Drawings**

## **Approximate Dimensions**

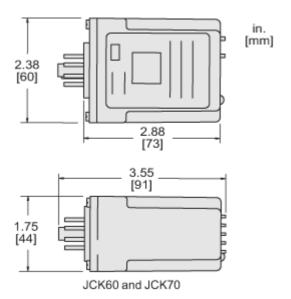

### Connections and Schema

### **Connections and Wiring Diagrams**

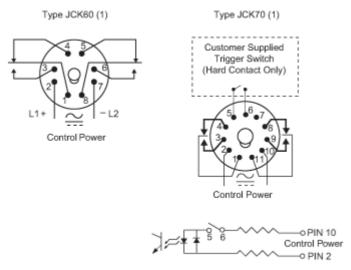

(1) Do not apply DC voltage to the 240 Vac timers (voltage code V24).