# **Product datasheet**

Specifications



# passive connection sub-base ABE7 - 16 inputs or outputs



ABE7H16C10

#### Main

Range of product	Modicon ABE7
Product or component type	Passive discrete I/O sub-base
Sub-base type	Miniature sub-base
[Us] rated supply voltage	1930 V conforming to IEC 61131-2
Number of channels	16
Number of terminal per channel	1
Connections - terminals	Screw type terminals, 1 x 0.091 x 1.5 mm², 0.091.5 mm² (AWG 28AWG 16) flexible with cable end
	Screw type terminals, 1 x 0.141 x 2.5 mm², 0.142.5 mm² (AWG 26AWG 12) solid
	Screw type terminals, 1 x 0.141 x 2.5 mm², 0.142.5 mm² (AWG 26AWG 14) flexible without cable end
	Screw type terminals, 2 x 0.092 x 0.75 mm <sup>2</sup> , 0.090.75 mm <sup>2</sup> (AWG 28AWG 20) flexible with cable end
	Screw type terminals, 2 x 0.22 x 2.5 mm <sup>2</sup> , 0.22.5 mm <sup>2</sup> (AWG 24AWG 14) solid

### Complementary

supply voltage type	DC
Number of horizontal rows	1
Status LED	1 LED (green) power ON
Polarity distribution	No
Short-circuit protection	2 A internal fuse, 5 x 20 mm, fast blow (PLC end)
Fixing mode	By clips (35 mm symmetrical DIN rail) By screws (solid plate with fixing kit)
Maximum supply current	1.8 A
Current per channel	0.5 A
Maximum current per output common	1.8 A
Voltage drop on power supply fuse	0.3 V
[Ui] rated insulation voltage	2000 V
Installation category	II conforming to IEC 60664-1
Tightening torque	0.6 N.m with flat Ø 3.5 mm screwdriver
Net weight	0.16 kg

# Environment

Price is "List Price" and may be subject to a trade discount - check with your local distributor or retailer for actual price.

Product certifications	GL
	DNV
	CSA
	UL
	EAC
IP degree of protection	IP2X conforming to IEC 60529
Resistance to incandescent wire	750 °C, extinction time <30 s conforming to IEC 60695-2-11
Shock resistance	15 gn for 11 ms conforming to IEC 60068-2-27
Vibration resistance	2 gn (f= 10150 Hz) conforming to IEC 60068-2-6
Resistance to electrostatic	4 kV (contact) level 3 conforming to IEC 61000-4-2
discharge	8 kV (air) level 3 conforming to IEC 61000-4-2
Resistance to radiated fields	10 V/m (260000001000000000 Hz) conforming to IEC 61000-4-3 level 3
Resistance to fast transients	2 kV level 3 conforming to IEC 61000-4-4
Ambient air temperature for operation	-560 °C conforming to IEC 61131-2
Ambient air temperature for storage	-4080 °C conforming to IEC 61131-2
Pollution degree	2 conforming to IEC 60664-1

# **Packing Units**

PCE
1
7 cm
8.3 cm
13.6 cm
1.155 kg
S03
16
30 cm
30 cm
40 cm
18.48 kg

# **Contractual warranty**

Warranty

18 months

# Sustainability Screen Premium

**Green Premium<sup>TM</sup> label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Yes

Learn more about Green Premium >

Guide to assess a product's sustainability >



Transparency RoHS/REACh

#### Well-being performance




Rohs Exemption Information

### **Certifications & Standards**

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	End of Life Information

#### **Dimensions Drawings**

#### Dimensions

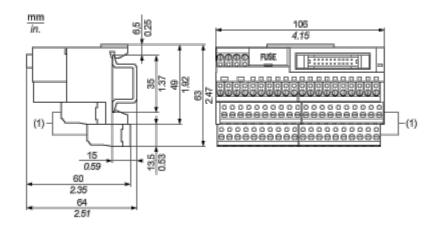


(1) ABE7BV10 / BV20

## **Product datasheet**


Mounting and Clearance

#### Mounting

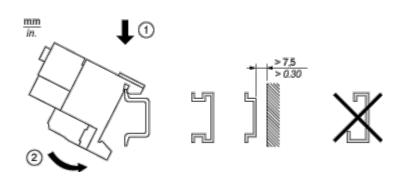



Connections and Schema

#### HE10 16 Channels



#### Wiring Diagram

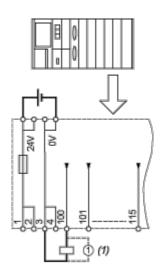

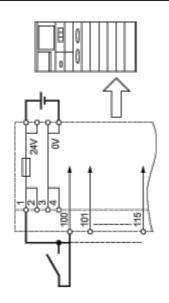


(1) Inductive load

### ABE7H16C10

#### Performance Curves

#### Curves for Determining Cable Type and Length According to the Current

#### 16-channel Sub-base

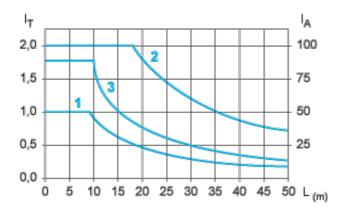

- L Cable length
- I<sub>T</sub> Total current per sub base (A)
- I<sub>A</sub> Average current per channel (mA)
- (1) TSXCDP••2 and ABFH20H••0 cables with c.s.a. 0.08 mm<sup>2</sup> (AWG 28).
- (2) TSXCDP••3 cables with c.s.a.  $0.34 \text{ mm}^2$  (AWG 22).
- (3) Cables with c.s.a. 0.13 mm<sup>2</sup> (AWG 26).

The curves are given for a voltage drop of 1 V in the cable. For n volts tolerance, multiply the length determined from the graph by n.