Specifications





variable speed drive, Altivar 212, 0.75kW, 1hp, 480V, 3 phases, with EMC class C1, IP55

ATV212W075N4C

() Discontinued on: Sep 15, 2023

() To be end-of-service on: Dec 31, 2024

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Device short name	ATV212
product destination	Asynchronous motors
Phase	3 phase
Motor power kW	0.75 kW
Maximum Horse Power Rating	1 hp
Supply voltage limits	323528 V
Supply frequency	5060 Hz - 55 %
Line current	1.4 A 480 V 1.7 A 380 V
Range of Product	Altivar 212
Product or Component Type	Variable speed drive
Product Specific Application	Pumps and fans in HVAC
Communication Port Protocol	BACnet LonWorks APOGEE FLN METASYS N2 Modbus
[Us] rated supply voltage	380480 V - 1510 %
EMC filter	Class C1 EMC filter integrated
IP degree of protection	IP55

Complementary

Apparent power	1.6 kVA 380 V
Continuous output current	2.2 A 380 V 2.2 A 460 V
Maximum transient current	2.4 A 60 s
Speed drive output frequency	0.5200 Hz
Speed range	110
Speed accuracy	+/- 10 % of nominal slip 0.2 Tn to Tn
Local signalling	for DC bus energized 1 LED (red)
Output voltage	<= power supply voltage

Price is "List Price" and may be subject to a trade discount - check with your local distributor or retailer for actual price.

Isolation	Electrical between power and control			
Type of cable	Without mounting kit 1 IEC cable 113.0000000000 °F (45 °C), copper 90 °C / XLPE/			
	EPR			
	Without mounting kit 1 IEC cable 113.0000000000 °F (45 °C), copper 70 °C / PVC			
	With UL Type 1 kit 3 UL 508 cable 104.0000000000 $^\circ\text{F}$ (40 $^\circ\text{C}),$ copper 75 $^\circ\text{C}$ / PVC			
Electrical connection	VIA, VIB, FM, FLA, FLB, FLC, RY, RC, F, R, RES terminal 0.004 in ² (2.5 mm ²) /			
	AWG 14			
	L1/R, L2/S, L3/T terminal 0.009 in ² (6 mm ²) / AWG 10			
Tightening torque	11.5 lbf.in (1.3 N.m), 11.5 lb.in L1/R, L2/S, L3/T)			
	5.3 lbf.in (0.6 N.m) VIA, VIB, FM, FLA, FLB, FLC, RY, RC, F, R, RES)			
Supply	Internal supply for reference potentiometer (1 to 10 kOhm) 10.5 V DC +/- 5 %, <10 A			
	overload and short-circuit protection			
	Internal supply 24 V DC 2127 V), <200 A overload and short-circuit protection			
Sampling duration	2 ms +/- 0.5 ms F discrete			
	2 ms +/- 0.5 ms R discrete			
	2 ms +/- 0.5 ms RES discrete			
	3.5 ms +/- 0.5 ms VIA analog			
	22 ms +/- 0.5 ms VIB analog			
Response time	FM 2 ms +/- 0.5 ms analog			
	FLA, FLC 7 ms +/- 0.5 ms discrete			
	FLB, FLC 7 ms +/- 0.5 ms discrete			
	RY, RC 7 ms +/- 0.5 ms discrete			
Accuracy	+/- 0.6 % VIA) for a temperature variation 60 °C			
	+/- 0.6 % VIB) for a temperature variation 60 °C			
	+/- 1 % FM) for a temperature variation 60 °C			
Linearity error	VIA +/- 0.15 % of maximum value input			
	VIB +/- 0.15 % of maximum value input			
	FM +/- 0.2 % output			
Analogue output type	FM switch-configurable voltage 010 V DC 7620 Ohm 10 bits			
	FM switch-configurable current 020 mA 970 Ohm 10 bits			
Discrete output type	Configurable relay logic FLA, FLC) NO - 100000 cycles			
	Configurable relay logic FLB, FLC) NC - 100000 cycles			
	Configurable relay logic RY, RC) NO - 100000 cycles			
Minimum switching current	3 mA 24 V DC configurable relay logic			
Maximum switching current	5 A 250 V AC resistive cos phi = 1 L/R = 0 ms FL, R)			
	5 A 30 V DC resistive cos phi = 1 L/R = 0 ms FL, R)			
	2 A 250 V AC inductive cos phi = 0.4 L/R = 7 ms FL, R)			
	2 A 30 V DC inductive cos phi = 0.4 L/R = 7 ms FL, R)			
Discrete input type	F programmable 24 V DC level 1 PLC 4700 Ohm			
	R programmable 24 V DC level 1 PLC 4700 Ohm			
	RES programmable 24 V DC level 1 PLC 4700 Ohm			
Discrete input logic	Positive logic (source) F, R, RES), <= 5 V, >= 11 V			
	Negative logic (sink) F, R, RES), >= 16 V, <= 10 V			
Dielectric strength	3535 V DC between earth and power terminals			
	5092 V DC between control and power terminals			
Insulation resistance	>= 1 mOhm 500 V DC for 1 minute			
Fraguanay resolution				
Frequency resolution	Display unit 0.1 Hz Analog input 0.024/50 Hz			
communication service				
Sommunication Service	Read device identification (43) Write single register (06)			
	Time out setting from 0.1 to 100 s			
	Write multiple registers (16) 2 words maximum			
	Read holding registers (03) 2 words maximum			
	Monitoring inhibitable			
Option card	Communication card LonWorks			
Specific application	HVAC			
Discrete output number	2			
Analogua innut number	2			
Analogue input number	2			

Analogue input type	VIA switch-configurable voltage 010 V DC 24 V max 30000 Ohm 10 bits VIB configurable voltage 010 V DC 24 V max 30000 Ohm 10 bits VIB configurable PTC probe 06 probes 1500 Ohm VIA switch-configurable current 020 mA 250 Ohm 10 bits			
Analogue output number	1			
Physical interface	2-wire RS 485			
Connector Type	1 RJ45 1 open style			
Transmission Rate	9600 bps or 19200 bps			
Transmission frame	RTU			
Number of addresses	1247			
Data format	8 bits, 1 stop, odd even or no configurable parity			
Type of polarization	No impedance			
Asynchronous motor control profile	Voltage/frequency ratio, automatic IR compensation (U/f + automatic Uo) Voltage/frequency ratio, 2 points Voltage/frequency ratio - Energy Saving, quadratic U/f Flux vector control without sensor, standard Voltage/frequency ratio, 5 points			
Torque accuracy	+/- 15 %			
Transient overtorque	120 % of nominal motor torque +/- 10 % 60 s			
Acceleration and deceleration ramps	Automatic based on the load Linear adjustable separately from 0.01 to 3200 s			
Motor slip compensation	Adjustable Not available in voltage/frequency ratio motor control Automatic whatever the load			
Switching frequency	616 kHz adjustable 1216 kHz with derating factor			
Nominal switching frequency	12 kHz			
Braking to standstill	By DC injection			
Network Frequency	47.563 Hz			
Prospective line Isc	5 kA			
Protection type	Overheating protection drive Thermal power stage drive Short-circuit between motor phases drive Input phase breaks drive Overcurrent between output phases and earth drive Overvoltages on the DC bus drive Break on the control circuit drive Against exceeding limit speed drive Line supply overvoltage and undervoltage drive Line supply undervoltage drive Against input phase loss drive Thermal protection motor Motor phase break motor With PTC probes motor			
Width	8.5 in (215 mm)			
Height	11.7 in (297 mm)			
Depth	7.6 in (192 mm)			

Environment

Pollution degree	2 IEC 61800-5-1
IP degree of protection	IP55 IEC 61800-5-1 IP55 IEC 60529

1.5 mm 313 Hz)IEC 60068-2-6			
1 gn 13200 Hz)EN/IEC 60068-2-8			
• •			
15 gn 11 ms IEC 60068-2-27			
Classes 3C1 IEC 60721-3-3			
Classes 3S2 IEC 60721-3-3			
48 dB 86/188/EEC			
3280.849842.52 ft (10003000 m) limited to 2000 m for the Corner Grounded			
distribution network with current derating 1 % per 100 m			
<= 3280.84 ft (1000 m) without derating			
595 % without condensation IEC 60068-2-3			
595 % without dripping water IEC 60068-2-3			
14.000000000104.0000000000 °F (-1040 °C) without derating)			
104.000000000122.0000000000 °F (4050 °C) with derating factor)			
Vertical +/- 10 degree			
CSA			
C-tick			
UL			
NOM 117			
CE			
IEC 61800-3 environments 2 category C1			
IEC 61800-5-1			
IEC 61800-3 category C1			
IEC 61800-3			
EN 55011 group 1 class B			
IEC 61800-3 environments 1 category C2			
IEC 61800-3 environments 2 category C2			
IEC 61800-5-1			
IEC 61800-3 environments 2 category C1			
IEC 61800-3			
IEC 61800-3 environments 1 category C3			
IEC 61800-3 environments 1 category C1			
IEC 61800-3 environments 2 category C3 IEC 61800-3 environments 2 category C2			
IEC 61800-3 environments 2 category C3			
EN 61800-3 category C1			
IEC 61800-3 environments 1 category C2			
IEC 61800-3 environments 1 category C3			
IEC 61800-3 environments 1 category C1			
With heat sink			
Electrostatic discharge immunity test level 3 IEC 61000-4-2			
Radiated radio-frequency electromagnetic field immunity test level 3 IEC 61000-4-3			
Electrical fast transient/burst immunity test level 4 IEC 61000-4-4			
1.2/50 µs - 8/20 µs surge immunity test level 3 IEC 61000-4-5			
Conducted radio-frequency immunity test level 3 IEC 61000-4-6 Voltage dips and interruptions immunity test IEC 61000-4-11			
Adjustable PI regulator			
-13.000000000158.000000000 °F (-2570 °C)			

Ordering and shipping details

Category	US1CP4D22157
Discount Schedule	CP4D
GTIN	3606480322600
Returnability	No
Country of origin	ID

Packing Units

Unit Type of Package 1

Number of Units in Package 1	1
Package 1 Height	11.024 in (28.000 cm)
Package 1 Width	10.236 in (26.000 cm)
Package 1 Length	14.567 in (37.000 cm)
Package 1 Weight	15.942 lb(US) (7.231 kg)
Unit Type of Package 2	P06
Number of Units in Package 2	5
Package 2 Height	29.528 in (75.000 cm)
Package 2 Width	23.622 in (60.000 cm)
Package 2 Length	31.496 in (80.000 cm)
Package 2 Weight	108.622 lb(US) (49.270 kg)

Contractual warranty

Warranty

18 months

Sustainability Screen Premium

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Yes

Learn more about Green Premium >

Guide to assess a product's sustainability >



Transparency RoHS/REACh

Well-being performance

Mercury Free


Rohs Exemption Information

Certifications & Standards

Reach Regulation	REACh Declaration			
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)			
China Rohs Regulation	China RoHS declaration			
Environmental Disclosure	Product Environmental Profile			
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.			
Weee Circularity Profile				

Dimensions Drawings

Dimensions



Dimensions in mm

ATV212W	а	b	с	G	Н
075N4U22N4 075N4CU22N4C	215	297	192	197	277
U30N4U75N4 U30N4CU75N4C	230	340	208	212	318

Dimensions in in.

ATV212W	а	b	с	G	Н
075N4U22N4 075N4CU22N4C	8.46	11.69	7.56	7.76	10.91
U30N4U75N4 U30N4CU75N4C	9.06	13.39	8.19	8.35	12.52

ATV212W075N4C

Mounting and Clearance

Mounting Recommendations


Clearance

Depending on the conditions in which the drive is to be used, its installation will require certain precautions and the use of appropriate accessories.

Install the unit vertically:

- Do not place it close to heating elements.
- Leave sufficient free space to ensure that the air required for cooling purposes can circulate from bottom to the top of the unit.


Type A Mounting



Connections and Schema

Recommended Wiring Diagram

3-Phase Power Supply

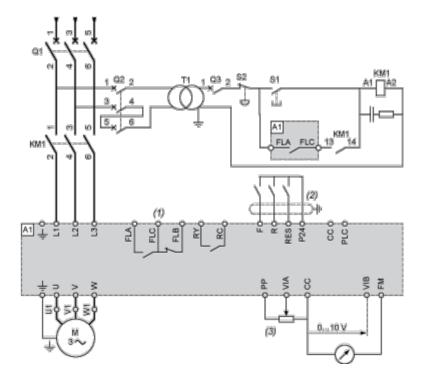

- A1: ATV 212 drive
- KM1: Contactor
- Q1: Circuit breaker
- Q2: GV2 L rated at twice the nominal primary current of T1
- Q3: GB2CB05
- S1, S2: XB4 B or XB5 A pushbuttons
- T1: 100 VA transformer 220 V secondary
- (1) Fault relay contacts for remote signalling of the drive status
- (2) Connection of the common for the logic inputs depends on the positioning of the switch (Source, PLC, Sink)
- (3) Reference potentiometer SZ1RV1202

NOTE: All terminals are located at the bottom of the drive. Install interference suppressors on all inductive circuits near the drive or connected on the same circuit, such as relays, contactors, solenoid valves, fluorescent lighting, etc.


Switches (Factory Settings)

Voltage/current selection for analog I/O (VIA and VIB)

VIA U	1
VIB U	PTC


Voltage/current selection for analog I/O (FM)







Other Possible Wiring Diagrams


Logic Inputs According to the Position of the Logic Type Switch





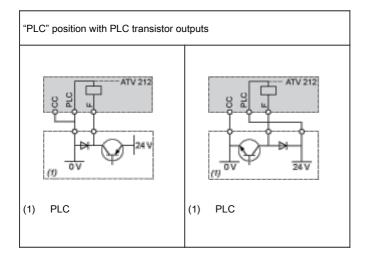


2-wire control



F: Forward

- R: Preset speed
- (2) ATV 212 control terminals

3-wire control




F: Forward

R: Stop

RES: Reverse

(2) ATV 212 control terminals


PTC probe




- (2) ATV 212 control terminals
- (3) Motor

Analog Inputs

Voltage analog inputs

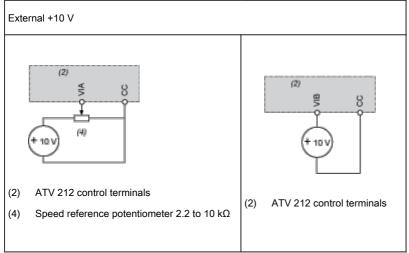

Analog input configured for current: 0-20 mA, 4-20 mA, X-Y mA




- (2) ATV 212 control terminals
- (5) Source 0-20 mA, 4-20 mA, X-Y mA

Analog input VIA configured as positive logic input ("Source" position)



(2) ATV 212 control terminals

Analog input VIA configured as negative logic input ("Sink" position)




(2) ATV 212 control terminals

Performance Curves

Derating Curves

The derating curves for the drive nominal current (In) depend on the temperature and the switching frequency. For intermediate temperatures (45°C for example), interpolate between 2 curves.



X Switching frequency