Specifications





(!) Discontinued

variable speed drive, Altivar 212, 7.5kW, 10hp, 480V, 3 phases, with EMC class C1, IP55

ATV212WU75N4C

- ! Discontinued on: Sep 15, 2023
- ! To be end-of-service on: Dec 31, 2024

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Device short name	ATV212
product destination	Asynchronous motors
Phase	3 phase
Motor power kW	7.5 kW
Maximum Horse Power Rating	10 hp
Supply voltage limits	323528 V
Supply frequency	5060 Hz - 55 %
Line current	11.7 A 480 V 14.7 A 380 V
Range of Product	Altivar 212
Product or Component Type	Variable speed drive
Product Specific Application	Pumps and fans in HVAC
Communication Port Protocol	LonWorks BACnet Modbus APOGEE FLN METASYS N2
[Us] rated supply voltage	380480 V - 1510 %
EMC filter	Class C1 EMC filter integrated
IP degree of protection	IP55

Complementary

Apparent power	12.2 kVA 380 V
Continuous output current	16 A 380 V 16 A 460 V
Maximum transient current	17.6 A 60 s
Speed drive output frequency	0.5200 Hz
Speed range	110
Speed accuracy	+/- 10 % of nominal slip 0.2 Tn to Tn
Local signalling	for DC bus energized 1 LED (red)
Output voltage	<= power supply voltage

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Isolation	Electrical between power and control
Type of cable	Without mounting kit 1 IEC cable 113.0000000000 °F (45 °C), copper 90 °C / XLPE/ EPR Without mounting kit 1 IEC cable 113.0000000000 °F (45 °C), copper 70 °C / PVC
	With UL Type 1 kit 3 UL 508 cable 104.0000000000 °F (40 °C), copper 75 °C / PVC
Electrical connection	VIA, VIB, FM, FLA, FLB, FLC, RY, RC, F, R, RES terminal 0.004 in ² (2.5 mm ²) /
	AWG 14 L1/R, L2/S, L3/T terminal 0.009 in² (6 mm²) / AWG 10
-	· · · · · · · · · · · · · · · · · · ·
Tightening torque	11.5 lbf.in (1.3 N.m), 11.5 lb.in L1/R, L2/S, L3/T) 5.3 lbf.in (0.6 N.m) VIA, VIB, FM, FLA, FLB, FLC, RY, RC, F, R, RES)
Supply	Internal supply for reference potentiometer (1 to 10 kOhm) 10.5 V DC +/- 5 %, <10 A
	overload and short-circuit protection Internal supply 24 V DC 2127 V), <200 A overload and short-circuit protection
Sampling duration	2 ms +/- 0.5 ms F discrete
. 0	2 ms +/- 0.5 ms R discrete
	2 ms +/- 0.5 ms RES discrete
	3.5 ms +/- 0.5 ms VIA analog 22 ms +/- 0.5 ms VIB analog
Decimana tima	<u> </u>
Response time	FM 2 ms +/- 0.5 ms analog FLA, FLC 7 ms +/- 0.5 ms discrete
	FLB, FLC 7 ms +/- 0.5 ms discrete
	RY, RC 7 ms +/- 0.5 ms discrete
Accuracy	+/- 0.6 % VIA) for a temperature variation 60 °C
· · · · · · · · · · · · · · · · · · ·	+/- 0.6 % VIB) for a temperature variation 60 °C
	+/- 1 % FM) for a temperature variation 60 °C
Linearity error	VIA +/- 0.15 % of maximum value input
-	VIB +/- 0.15 % of maximum value input
	FM +/- 0.2 % output
Analogue output type	FM switch-configurable voltage 010 V DC 7620 Ohm 10 bits
	FM switch-configurable current 020 mA 970 Ohm 10 bits
Discrete output type	Configurable relay logic FLA, FLC) NO - 100000 cycles
	Configurable relay logic FLB, FLC) NC - 100000 cycles
	Configurable relay logic RY, RC) NO - 100000 cycles
Minimum switching current	3 mA 24 V DC configurable relay logic
Maximum switching current	5 A 250 V AC resistive cos phi = 1 L/R = 0 ms FL, R)
	5 A 30 V DC resistive cos phi = 1 L/R = 0 ms FL, R)
	2 A 250 V AC inductive cos phi = 0.4 L/R = 7 ms FL, R) 2 A 30 V DC inductive cos phi = 0.4 L/R = 7 ms FL, R)
	27.00 ¥ DO IIIddolffo 000 pill = 0.4 DIX = 7 IIIO L., IX)
Discrete input type	F programmable 24 V DC level 1 PLC 4700 Ohm
	R programmable 24 V DC level 1 PLC 4700 Ohm RES programmable 24 V DC level 1 PLC 4700 Ohm
Discrete input logic	Positive logic (source) F, R, RES), <= 5 V, >= 11 V Negative logic (sink) F, R, RES), >= 16 V, <= 10 V
Dielectric strength	3535 V DC between earth and power terminals 5092 V DC between control and power terminals
Insulation resistance	>= 1 mOhm 500 V DC for 1 minute
Frequency resolution	Display unit 0.1 Hz
• • • • • • • • • • • • • • • • • • • •	Analog input 0.024/50 Hz
communication service	Write multiple registers (16) 2 words maximum
	Write single register (06)
	Read device identification (43) Read holding registers (03) 2 words maximum
	Monitoring inhibitable
	Time out setting from 0.1 to 100 s
Option card	Communication card LonWorks
Option card Specific application	Communication card LonWorks HVAC
·	
Specific application	HVAC

Analogue input type	VIA switch-configurable voltage 010 V DC 24 V max 30000 Ohm 10 bits VIB configurable voltage 010 V DC 24 V max 30000 Ohm 10 bits VIB configurable PTC probe 06 probes 1500 Ohm VIA switch-configurable current 020 mA 250 Ohm 10 bits				
Analogue output number	1				
Physical interface	2-wire RS 485				
Connector Type	1 RJ45 1 open style				
Transmission Rate	9600 bps or 19200 bps				
Transmission frame	RTU				
Number of addresses	1247				
Data format	8 bits, 1 stop, odd even or no configurable parity				
Type of polarization	No impedance				
Asynchronous motor control profile	Voltage/frequency ratio, 5 points Voltage/frequency ratio, automatic IR compensation (U/f + automatic Uo) Voltage/frequency ratio, 2 points Voltage/frequency ratio - Energy Saving, quadratic U/f Flux vector control without sensor, standard				
Torque accuracy	+/- 15 %				
Transient overtorque	120 % of nominal motor torque +/- 10 % 60 s				
Acceleration and deceleration ramps	Automatic based on the load Linear adjustable separately from 0.01 to 3200 s				
Motor slip compensation	Adjustable Not available in voltage/frequency ratio motor control Automatic whatever the load				
Switching frequency	616 kHz adjustable 1216 kHz with derating factor				
Nominal switching frequency	12 kHz				
Braking to standstill	By DC injection				
Network Frequency	47.563 Hz				
Prospective line Isc	22 kA				
Protection type	Overheating protection drive Thermal power stage drive Short-circuit between motor phases drive Input phase breaks drive Overcurrent between output phases and earth drive Overvoltages on the DC bus drive Break on the control circuit drive Against exceeding limit speed drive Line supply overvoltage and undervoltage drive Line supply undervoltage drive Against input phase loss drive Thermal protection motor Motor phase break motor With PTC probes motor				
Width	9.06 in (230 mm)				
Height	13.4 in (340 mm)				
Depth	8.2 in (208 mm)				

Environment

Pollution degree	3 IEC 61800-5-1
IP degree of protection	IP55 IEC 61800-5-1
	IP55 IEC 60529

Vibration resistance	1.5 mm 313 Hz)IEC 60068-2-6 1 gn 13200 Hz)EN/IEC 60068-2-8			
Shock resistance	15 gn 11 ms IEC 60068-2-27			
	10 gh 11 mo 120 00000 2 27			
Environmental characteristic	Classes 3C1 IEC 60721-3-3 Classes 3S2 IEC 60721-3-3			
Noise level	55 dB 86/188/EEC			
Operating altitude	3280.849842.52 ft (10003000 m) limited to 2000 m for the Corner Grounded distribution network with current derating 1 % per 100 m <= 3280.84 ft (1000 m) without derating			
Relative humidity	595 % without condensation IEC 60068-2-3 595 % without dripping water IEC 60068-2-3			
Ambient air temperature for operation	14.0000000000104.0000000000 °F (-1040 °C) without derating) 104.0000000000122.0000000000 °F (4050 °C) with derating factor)			
Operating position	Vertical +/- 10 degree			
Product Certifications	NOM 117 C-tick CSA UL			
Marking	CE			
Standards	IEC 61800-3 environments 1 category C1 IEC 61800-3 environments 2 category C2 IEC 61800-3 environments 2 category C1 IEC 61800-3 environments 1 category C1 IEC 61800-3 environments 2 category C3 EN 55011 group 1 class B EN 61800-3 category C1 IEC 61800-3 environments 2 category C1 IEC 61800-3 environments 2 category C3 IEC 61800-3 environments 1 category C2 IEC 61800-3 environments 1 category C2 IEC 61800-3 IEC 61800-3 IEC 61800-3 IEC 61800-3 environments 1 category C3 IEC 61800-3 IEC 61800-3 environments 1 category C3 IEC 61800-5-1			
Assembly style	With heat sink			
Electromagnetic compatibility	Electrostatic discharge immunity test level 3 IEC 61000-4-2 Radiated radio-frequency electromagnetic field immunity test level 3 IEC 61000-4-3 Electrical fast transient/burst immunity test level 4 IEC 61000-4-4 1.2/50 µs - 8/20 µs surge immunity test level 3 IEC 61000-4-5 Conducted radio-frequency immunity test level 3 IEC 61000-4-6 Voltage dips and interruptions immunity test IEC 61000-4-11			
Regulation loop	Adjustable PI regulator			
Ambient Air Temperature for Storage	-13.0000000000158.0000000000 °F (-2570 °C)			

Ordering and shipping details

Category	US1CP4D22157
Discount Schedule	CP4D
GTIN	3606480322716
Returnability	Yes
Country of origin	ID

Packing Units

Unit Type of Package 1	PCE	

Number of Units in Package 1	1
Package 1 Height	10.630 in (27.000 cm)
Package 1 Width	16.339 in (41.500 cm)
Package 1 Length	14.173 in (36.000 cm)
Package 1 Weight	24.343 lb(US) (11.042 kg)
Unit Type of Package 2	P06
Number of Units in Package 2	4
Package 2 Height	29.528 in (75.000 cm)
Package 2 Width	23.622 in (60.000 cm)
Package 2 Length	31.496 in (80.000 cm)
Package 2 Weight	126.034 lb(US) (57.168 kg)

Contractual warranty

Warranty 18 months

Sustainability Green Premium™

Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance



Mercury Free



Rohs Exemption Information

Yes

Certifications & Standards

Reach Regulation	REACh Declaration				
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)				
China Rohs Regulation	China RoHS declaration				
Environmental Disclosure	Product Environmental Profile				
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.				
Weee Circularity Profile	· · · · · · · · · · · · · · · · · · ·				

Jul 22, 2024

ATV212WU75N4C

Dimensions Drawings

Dimensions



Dimensions in mm

Diffiensions in film					
ATV212W	а	b	С	G	Н
075N4U22N4 075N4CU22N4C	215	297	192	197	277
U30N4U75N4 U30N4CU75N4C	230	340	208	212	318

Dimensions in in.

ATV212W	а	b	С	G	Н
075N4U22N4 075N4CU22N4C	8.46	11.69	7.56	7.76	10.91
U30N4U75N4 U30N4CU75N4C	9.06	13.39	8.19	8.35	12.52

ATV212WU75N4C

Mounting and Clearance

Mounting Recommendations

Clearance

Depending on the conditions in which the drive is to be used, its installation will require certain precautions and the use of appropriate accessories.

Install the unit vertically:

- Do not place it close to heating elements.
- Leave sufficient free space to ensure that the air required for cooling purposes can circulate from bottom to the

Type A Mounting






Connections and Schema

Recommended Wiring Diagram

3-Phase Power Supply

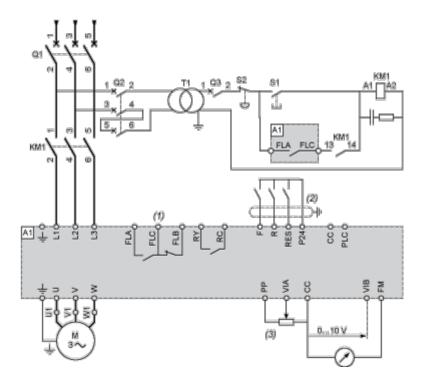

A1: ATV 212 drive

KM1: Contactor

Q1: Circuit breaker

Q2: GV2 L rated at twice the nominal primary current of T1

Q3: GB2CB05

S1, S2: XB4 B or XB5 A pushbuttons

T1: 100 VA transformer 220 V secondary

- (1) Fault relay contacts for remote signalling of the drive status
- (2) Connection of the common for the logic inputs depends on the positioning of the switch (Source, PLC, Sink)
- (3) Reference potentiometer SZ1RV1202

NOTE: All terminals are located at the bottom of the drive. Install interference suppressors on all inductive circuits near the drive or connected on the same circuit, such as relays, contactors, solenoid valves, fluorescent lighting, etc.

Switches (Factory Settings)

Voltage/current selection for analog I/O (VIA and VIB)



Voltage/current selection for analog I/O (FM)



ATV212WU75N4C


Selection of logic type PLC


Sink Source (2)


- (1) negative logic
- (2) positive logic

Other Possible Wiring Diagrams


Logic Inputs According to the Position of the Logic Type Switch





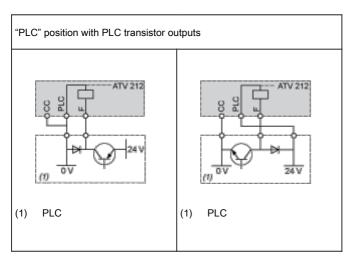


2-wire control



- F: Forward
- R: Preset speed
- (2) ATV 212 control terminals


3-wire control



- F: Forward
- R: Stop
- RES: Reverse
- (2) ATV 212 control terminals

PTC probe


ATV212WU75N4C




- (2) ATV 212 control terminals
- (3)Motor

Analog Inputs

Voltage analog inputs

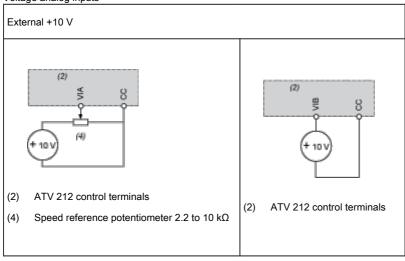


Analog input configured for current: 0-20 mA, 4-20 mA, X-Y mA




- (2) ATV 212 control terminals
- Source 0-20 mA, 4-20 mA, X-Y mA

Analog input VIA configured as positive logic input ("Source" position)



ATV 212 control terminals (2)

Analog input VIA configured as negative logic input ("Sink" position)




ATV 212 control terminals (2)

ATV212WU75N4C

Performance Curves

Derating Curves

The derating curves for the drive nominal current (In) depend on the temperature and the switching frequency. For intermediate temperatures (45°C for example), interpolate between 2 curves.

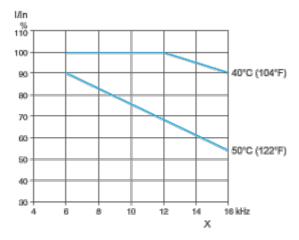

X Switching frequency