Product datasheet

Specifications





servo motor BCH, Lexium 28, 40mm, 50W, 0.054kg.cmÂ², without oil seal, smooth, leads connection

BCH2MBA530CA5C

① Discontinued

() Discontinued on: Aug 27, 2020

Main

Range compatibility	Lexium 28
Device short name	BCH2
Product or component type	Servo motor

Complementary

oompicinentary	
Maximum mechanical speed	5000 rpm
[Us] rated supply voltage	220 V
	110 V
Network number of phases	Single phase
	Three phase
Continuous stall current	0.54 A
Continuous stall torque	0.16 N.m for LXM28 at 0.64 A, 220 V, single phase
	0.16 N.m for LXM28 at 0.64 A, 220 V, three phase
	0.16 N.m for LXM28 at 1.2 A, 110 V, single phase
Continuous power	50 W
Peak stall torque	0.48 N.m for LXM28 at 0.64 A, 220 V, single phase
	0.48 N.m for LXM28 at 0.64 A, 220 V, three phase
	0.48 N.m for LXM28 at 1.2 A, 110 V, single phase
Nominal output power	50 W for LXM28 at 0.64 A, 220 V, single phase
	50 W for LXM28 at 0.64 A, 220 V, three phase
	50 W for LXM28 at 1.2 A, 110 V, single phase
Nominal torque	0.16 N.m for LXM28 at 0.64 A, 220 V, single phase
	0.16 N.m for LXM28 at 0.64 A, 220 V, three phase
	0.16 N.m for LXM28 at 1.2 A, 110 V, single phase
Nominal speed	3000 rpm for LXM28 at 0.64 A, 220 V, single phase
	3000 rpm for LXM28 at 0.64 A, 220 V, three phase
	3000 rpm for LXM28 at 1.2 A, 110 V, single phase
Maximum current Irms	1.77 A for LXM28 at 0.05 kW, 220 V
	1.77 A for LXM28 at 0.05 kW, 110 V
Maximum permanent current	0.59 A
Product compatibility	LXM28 servo drive motor at 0.05 kW, 220 V, single phase
	LXM28 servo drive motor at 0.05 kW, 220 V, three phase
	LXM28 servo drive motor at 0.05 kW, 110 V, single phase
Shaft end	Smooth shaft
Shaft diameter	8 mm
Shaft length	25 mm
Feedback type	20 bits single turn absolute encoder

Holding brake	Without
mounting support	Asian standard flange
Motor flange size	40 mm
Electrical connection	Free lead
Torque constant	0.3 N.m/A at 20 °C
Back emf constant	18 V/krpm at 20 °C
Rotor inertia	0.054 kg.cm ²
Stator resistance	31 Ohm at 20 °C
Stator inductance	24.7 mH at 20 °C
Stator electrical time constant	0.8 ms at 20 °C
Maximum radial force Fr	85 N at 3000 rpm
Maximum axial force Fa	40 N
Brake pull-in power	4.35 W
Type of cooling	Natural convection
Length	82 mm
Number of motor stacks	1
Centring collar diameter	30 mm
Centring collar depth	3 mm
Number of mounting holes	4
Mounting holes diameter	4.5 mm
Circle diameter of the mounting holes	46 mm
Distance shaft shoulder-flange	3 mm
Net weight	0.4 kg

Environment

IP degree of protection	IP54 IM B5, IM V1 IP50 IM V3
Ambient air temperature for operation	-2040 °C

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	8.0 cm
Package 1 Width	13.0 cm
Package 1 Length	24.0 cm
Package 1 Weight	643.0 g

Sustainability Screen Premium

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



Transparency RoHS/REACh

Well-being performance

Reach Free Of Svhc
Mercury Free
Rohs Exemption Information Yes

Certifications & Standards


Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)	
China Rohs Regulation	China RoHS declaration	
Environmental Disclosure	Product Environmental Profile	
Weee	The product must be disposed on European Union markets following specific w collection and never end up in rubbish bins	
Circularity Profile	End of Life Information	

Product datasheet

Dimensions Drawings

Dimensions


Dimensions of Motor

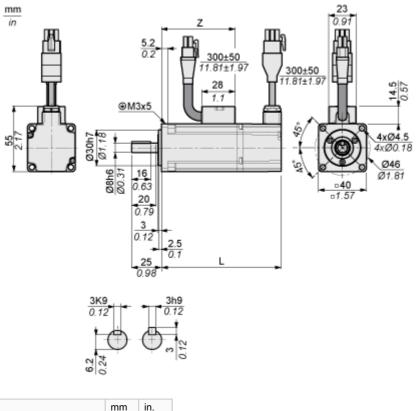

	mm	in.
L (without holding brake)	82	3.23
L (with holding brake)	112	4.41
Z	43.5	1.71

Performance Curves

Torque/Speed Curves with 230 V Single/Three Phase Supply Voltage

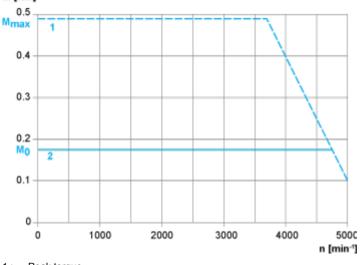


Servo Motor Without Shaft Sealing Ring and LXM28AUA5••• Servo Drive M [Nm]

1: Peak torque

2: Continuous torque

Product datasheet BCH2MBA530CA5C

Torque/Speed Curves with 230 V Single/Three Phase Supply Voltage

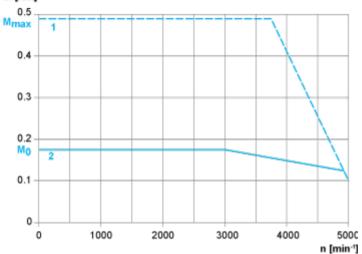

Servo Motor with shaft sealing ring and LXM28AUA5••• Servo Drive M [Nm]

1: Peak torque

2: Continuous torque