Product datasheet

Specifications





servo motor BCH, Lexium 28, 130mm, 500W, with oil seal, smooth, straight connection

BCH2MM0522CA6C

Main

Range compatibility	Lexium 28
Device short name	BCH2
Product or component type	Servo motor

Complementary

Complementary	
Maximum mechanical speed	3000 rpm
[Us] rated supply voltage	220 V 110 V
Network number of phases	Three phase Single phase
Continuous stall current	2.89 A
Continuous stall torque	2.39 N.m for LXM28 at 4.5 A, 220 V, single phase 2.39 N.m for LXM28 at 4.5 A, 220 V, three phase 2.39 N.m for LXM28 at 9 A, 110 V, single phase
Continuous power	500 W
Peak stall torque	7.16 N.m for LXM28 at 4.5 A, 220 V, single phase 7.16 N.m for LXM28 at 4.5 A, 220 V, three phase 7.16 N.m for LXM28 at 9 A, 110 V, single phase
Nominal output power	500 W for LXM28 at 4.5 A, 220 V, single phase 500 W for LXM28 at 4.5 A, 220 V, three phase 500 W for LXM28 at 9 A, 110 V, single phase
Nominal torque	2.39 N.m for LXM28 at 4.5 A, 220 V, single phase 2.39 N.m for LXM28 at 4.5 A, 220 V, three phase 2.39 N.m for LXM28 at 9 A, 110 V, single phase
Nominal speed	2000 rpm for LXM28 at 4.5 A, 220 V, single phase 2000 rpm for LXM28 at 4.5 A, 220 V, three phase 2000 rpm for LXM28 at 9 A, 110 V, single phase
Maximum current Irms	9.18 A for LXM28 at 0.5 kW, 220 V 9.18 A for LXM28 at 0.5 kW, 110 V
Maximum permanent current	3.24 A
Product compatibility	LXM28 servo drive motor at 0.5 kW, 220 V, single phase LXM28 servo drive motor at 0.5 kW, 220 V, three phase LXM28 servo drive motor at 0.5 kW, 110 V, single phase
Shaft end	Smooth shaft
Shaft diameter	22 mm
Shaft length	45 mm
Feedback type	20 bits single turn absolute encoder
Holding brake	Without
mounting support	Asian standard flange

Motor flange size	130 mm
Electrical connection	Connector MIL
Torque constant	0.83 N.m/A at 20 °C
Back emf constant	50 V/krpm at 20 °C
Rotor inertia	6.63 kg.cm ²
Stator resistance	0.62 Ohm at 20 °C
Stator inductance	7.4 mH at 20 °C
Stator electrical time constant	11.94 ms at 20 °C
Maximum radial force Fr	670 N at 2000 rpm
Maximum axial force Fa	200 N
Brake pull-in power	19.7 W
Type of cooling	Natural convection
Length	147 mm
Number of motor stacks	1
Centring collar diameter	110 mm
Centring collar depth	8 mm
Number of mounting holes	4
Mounting holes diameter	9.2 mm
Circle diameter of the mounting holes	145 mm
Distance shaft shoulder-flange	8 mm
Net weight	7 kg

Environment

IP degree of protection	IP50 IM V3 IP65 IM B5, IM V1
Ambient air temperature for operation	-2040 °C

Packing Units

-	
Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	18.1 cm
Package 1 Width	23.0 cm
Package 1 Length	36.0 cm
Package 1 Weight	7.91 kg

Sustainability Screen

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



Transparency RoHS/REACh

Well-being performance

Reach Free Of Svhc
Mercury Free
Rohs Exemption Information Yes


Certifications & Standards

Reach Regulation	REACh Declaration	
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)	
China Rohs Regulation	China RoHS declaration	
Environmental Disclosure	Product Environmental Profile	
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins	
Circularity Profile	End of Life Information	

Dimensions Drawings

Dimensions


Dimensions of Motor

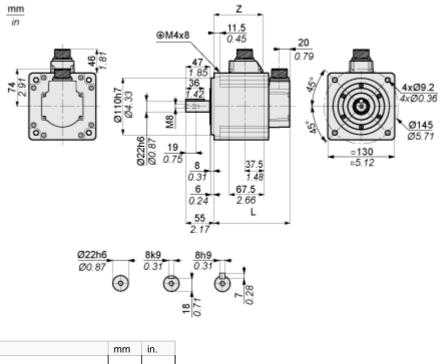

	mm	in.
L (without holding brake)	147	5.79
L (with holding brake)	183	7.2
Z	94.5	3.72

Performance Curves

Torque/Speed Curves with 230 V Single/Three Phase Supply Voltage

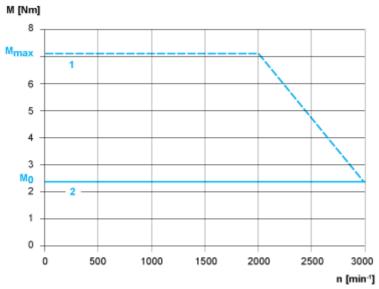

Servo Motor with LXM28AU04 ••• Servo Drive

1: Peak torque

2: Continuous torque