Product datasheet

Specification





servo motor BCH, 180mm, 3500W, w oil seal, w key, brake, straight con

BCH2MR3523CF6C

EAN Code: 3606480734915

Main

Range compatibility	Lexium 28
Device short name	BCH2
Product or component type	Servo motor

Complementary

o o mpromontar y		
Maximum mechanical speed	3000 rpm	
[Us] rated supply voltage	220 V	
Network number of phases	Three phase	
Continuous stall current	16.55 A	
Continuous stall torque	16.7 N.m for LXM26D at 22.9 A, 220 V, three phase 16.7 N.m for LXM28 at 22.9 A, 220 V, three phase	
Continuous power	3500 W	
Peak stall torque	50.3 N.m for LXM26D at 22.9 A, 220 V, three phase 50.3 N.m for LXM28 at 22.9 A, 220 V, three phase	
Nominal output power	3500 W for LXM26D at 22.9 A, 220 V, three phase 3500 W for LXM28 at 22.9 A, 220 V, three phase	
Nominal torque	16.7 N.m for LXM26D at 22.9 A, 220 V, three phase 16.7 N.m for LXM28 at 22.9 A, 220 V, three phase	
Nominal speed	2000 rpm for LXM26D at 22.9 A, 220 V, three phase 2000 rpm for LXM28 at 22.9 A, 220 V, three phase	
Maximum current Irms	57.8 A for LXM26D at 3.5 kW, 220 V 57.8 A for LXM28 at 3.5 kW, 220 V	
Maximum permanent current	19 A	
Product compatibility	LXM26D servo drive motor at 3.5 kW, 220 V, three phase LXM28 servo drive motor at 3.5 kW, 220 V, three phase	
Shaft end	Keyed	
Shaft diameter	35 mm	
Shaft length	79 mm	
Key width	10 mm	
Feedback type	20 bits single turn absolute encoder	
Holding brake	With	
Holding torque	48 N.m built-in	
mounting support	Asian standard flange	
Motor flange size	180 mm	
Electrical connection	Connector MIL	

Torque constant	1.01 N.m/A at 20 °C	
Back emf constant	61 V/krpm at 20 °C	
Rotor inertia	54.1 kg.cm²	
Stator resistance	0.157 Ohm at 20 °C	
Stator inductance	2.93 mH at 20 °C	
Stator electrical time constant	18.66 ms at 20 °C	
Maximum radial force Fr	1200 N at 2000 rpm	
Maximum axial force Fa	497 N	
Brake pull-in power	49.6 W	
Type of cooling	Natural convection	
Length	235 mm	
Number of motor stacks	2	
Centring collar diameter	114.3 mm	
Centring collar depth	4 mm	
Number of mounting holes	4	
Mounting holes diameter	13.5 mm	
Circle diameter of the mounting holes	200 mm	
Distance shaft shoulder-flange	4 mm	
Net weight	23 kg	

Environment

IP degree of protection	IP50 IM V3 IP65 IM B5, IM V1	
Ambient air temperature for operation	040 °C	

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	24.5 cm
Package 1 Width	29 cm
Package 1 Length	58.5 cm
Package 1 Weight	24630 g
Unit Type of Package 2	P06
Number of Units in Package 2	4
Package 2 Height	50 cm
Package 2 Width	80 cm
Package 2 Length	60 cm
Package 2 Weight	110.7 kg

Contractual warranty

Warranty 18	months
-------------	--------



Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance

⊘	Reach Free Of Svhc	
②	Mercury Free	
C)	R ₹3 E ∉ inption Information	Yes
⊘	Pvc Free	

Certifications & Standards


Reach Regulation	REACh Declaration	
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)	
China Rohs Regulation	China RoHS declaration	
Environmental Disclosure	Product Environmental Profile	
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins	
Circularity Profile	End of Life Information	

BCH2MR3523CF6C

Dimensions Drawings

Dimensions

Dimensions of Motor

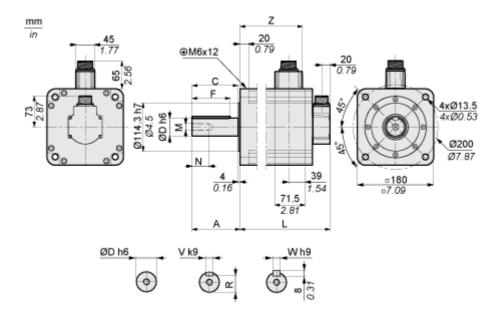


	mm	in.
L (without holding brake)	202	7.95
L (with holding brake)	235	9.25
A	79	3.11
С	73	2.87
D	35	1.38
F	63	2.48
N	28	1.10
М	M12	
R	30	1.18
V	10	0.39
W	10	0.39
Z	136	5.35

Performance Curves

Torque/Speed Curves with 230 V Single/Three Phase Supply Voltage

Servo Motor with LXM28AU45●●● Servo Drive

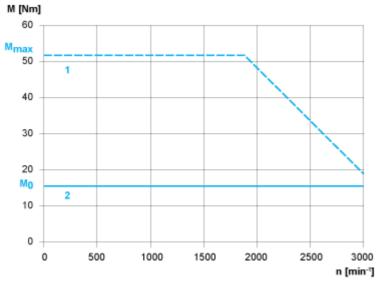

- 1: Peak torque
- 2: Continuous torque