Product datasheet

Specifications

Green Premium[™]



servo motor BMH, Lexium 32, 1.2Nm, 8000rpm, keyed shaft, with brake, IP54, 16 multiturn encoder, straight

BMH0701P17F1A

- () Discontinued on: 18 Apr 2024
- (!) To be end-of-service on: 18 Apr 2026

Main

Mann	
Device short name	ВМН
Product or component type	Servo motor
Maximum mechanical speed	8000 rpm
Continuous stall torque	1.2 N.m for LXM32.U60N4 at 1.5 A, 400 V, three phase 1.2 N.m for LXM32.U60N4 at 1.5 A, 480 V, three phase 1.4 N.m for LXM32.D12N4 at 3 A, 400 V, three phase 1.4 N.m for LXM32.D12N4 at 3 A, 480 V, three phase
Peak stall torque	4.2 N.m for LXM32.U60N4 at 1.5 A, 400 V, three phase 4.2 N.m for LXM32.U60N4 at 1.5 A, 480 V, three phase 4.2 N.m for LXM32.D12N4 at 3 A, 400 V, three phase 4.2 N.m for LXM32.D12N4 at 3 A, 480 V, three phase
Nominal output power	350 W for LXM32.U60N4 at 1.5 A, 400 V, three phase 350 W for LXM32.U60N4 at 1.5 A, 480 V, three phase 700 W for LXM32.D12N4 at 3 A, 400 V, three phase 700 W for LXM32.D12N4 at 3 A, 480 V, three phase
Nominal torque	1.1 N.m for LXM32.U60N4 at 1.5 A, 400 V, three phase 1.1 N.m for LXM32.U60N4 at 1.5 A, 480 V, three phase 1.3 N.m for LXM32.D12N4 at 3 A, 400 V, three phase 1.3 N.m for LXM32.D12N4 at 3 A, 480 V, three phase
Nominal speed	3000 rpm for LXM32.U60N4 at 1.5 A, 400 V, three phase 3000 rpm for LXM32.U60N4 at 1.5 A, 480 V, three phase 5000 rpm for LXM32.D12N4 at 3 A, 400 V, three phase 5000 rpm for LXM32.D12N4 at 3 A, 480 V, three phase
Product compatibility	LXM32.U60N4 at 400480 V three phase LXM32.D12N4 at 400480 V three phase
Shaft end	Keyed
IP degree of protection	IP54 standard
Speed feedback resolution	32768 points/turn x 4096 turns
Holding brake	With
mounting support	International standard flange
Electrical connection	Straight connectors

Complementary

Range compatibility	Lexium 32
[Us] rated supply voltage	480 V
Network number of phases	Three phase

Life Is On Schneider

Continuous stall current	1.78 A
Continuous power	1.05 W
Maximum current Irms	6 A for LXM32.U60N4 6 A for LXM32.D12N4
Maximum permanent current	5.97 A
Second shaft	Without second shaft end
Shaft diameter	11 mm
Shaft length	23 mm
Key width	18 mm
Feedback type	Multiturn SinCos Hiperface
Holding torque	3 N.m holding brake
Motor flange size	70 mm
Number of motor stacks	1
Torque constant	0.79 N.m/A at 120 °C
Back emf constant	50.72 V/krpm at 120 °C
Number of motor poles	10
Rotor inertia	0.7 kg.cm ²
	°
Stator resistance	8.3 Ohm at 20 °C
Stator resistance Stator inductance	
	8.3 Ohm at 20 °C
Stator inductance	8.3 Ohm at 20 °C 23.4 mH at 20 °C
Stator inductance Stator electrical time constant	8.3 Ohm at 20 °C 23.4 mH at 20 °C 2.8 ms at 20 °C 660 N at 1000 rpm 520 N at 2000 rpm 460 N at 3000 rpm 410 N at 4000 rpm 380 N at 5000 rpm
Stator inductance Stator electrical time constant Maximum radial force Fr	8.3 Ohm at 20 °C 23.4 mH at 20 °C 2.8 ms at 20 °C 660 N at 1000 rpm 520 N at 2000 rpm 460 N at 3000 rpm 410 N at 4000 rpm 380 N at 5000 rpm 360 N at 6000 rpm
Stator inductance Stator electrical time constant Maximum radial force Fr Maximum axial force Fa	8.3 Ohm at 20 °C 23.4 mH at 20 °C 2.8 ms at 20 °C 660 N at 1000 rpm 520 N at 2000 rpm 460 N at 3000 rpm 410 N at 4000 rpm 380 N at 5000 rpm 360 N at 6000 rpm 0.2 x Fr
Stator inductance Stator electrical time constant Maximum radial force Fr Maximum axial force Fa Brake pull-in power	8.3 Ohm at 20 °C 23.4 mH at 20 °C 2.8 ms at 20 °C 660 N at 1000 rpm 520 N at 2000 rpm 460 N at 3000 rpm 410 N at 4000 rpm 380 N at 5000 rpm 360 N at 6000 rpm 0.2 x Fr 7 W
Stator inductance Stator electrical time constant Maximum radial force Fr Maximum axial force Fa Brake pull-in power Type of cooling	8.3 Ohm at 20 °C 23.4 mH at 20 °C 2.8 ms at 20 °C 660 N at 1000 rpm 520 N at 2000 rpm 460 N at 3000 rpm 410 N at 4000 rpm 380 N at 5000 rpm 360 N at 6000 rpm 0.2 x Fr 7 W Natural convection
Stator inductance Stator electrical time constant Maximum radial force Fr Maximum axial force Fa Brake pull-in power Type of cooling Length	8.3 Ohm at 20 °C 23.4 mH at 20 °C 2.8 ms at 20 °C 660 N at 1000 rpm 520 N at 2000 rpm 460 N at 3000 rpm 410 N at 4000 rpm 380 N at 5000 rpm 360 N at 6000 rpm 0.2 x Fr 7 W Natural convection 161 mm
Stator inductance Stator electrical time constant Maximum radial force Fr Maximum axial force Fa Brake pull-in power Type of cooling Length Centring collar diameter	8.3 Ohm at 20 °C 23.4 mH at 20 °C 2.8 ms at 20 °C 660 N at 1000 rpm 520 N at 2000 rpm 460 N at 3000 rpm 410 N at 4000 rpm 380 N at 5000 rpm 360 N at 6000 rpm 0.2 x Fr 7 W Natural convection 161 mm 60 mm
Stator inductance Stator electrical time constant Maximum radial force Fr Maximum axial force Fa Brake pull-in power Type of cooling Length Centring collar diameter Centring collar depth	8.3 Ohm at 20 °C 23.4 mH at 20 °C 2.8 ms at 20 °C 660 N at 1000 rpm 520 N at 2000 rpm 460 N at 3000 rpm 400 N at 3000 rpm 410 N at 4000 rpm 380 N at 5000 rpm 360 N at 6000 rpm 0.2 x Fr 7 W Natural convection 161 mm 60 mm 2.5 mm
Stator inductance Stator electrical time constant Maximum radial force Fr Maximum axial force Fa Brake pull-in power Type of cooling Length Centring collar diameter Centring collar depth Number of mounting holes	8.3 Ohm at 20 °C 23.4 mH at 20 °C 2.8 ms at 20 °C 660 N at 1000 rpm 520 N at 2000 rpm 460 N at 3000 rpm 410 N at 4000 rpm 380 N at 5000 rpm 360 N at 6000 rpm 0.2 x Fr 7 W Natural convection 161 mm 60 mm 2.5 mm 4

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	11.0 cm
Package 1 Width	20.0 cm
Package 1 Length	40.0 cm
Package 1 Weight	2.8 kg

Contractual warranty

Warranty

18 months

Sustainability Screen Premium

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



Transparency RoHS/REACh

Well-being performance




Certifications & Standards

Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)					
China Rohs Regulation	China RoHS declaration					
Environmental Disclosure	Product Environmental Profile					
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins					
Circularity Profile	No need of specific recycling operations					

Dimensions Drawings

Servo Motors Dimensions

Example with Straight Connectors

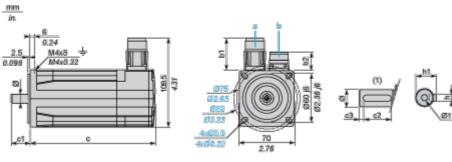

a: Power supply for servo motor brake

b: Power supply for servo motor encoder

(1) Shaft end, keyed slot (optional)

Dimensions in mm

U U		Rotatabl connecto	e angled ors	c (without	c (with	c1	c2	c3	h	h1	ø	Ø1 for
b1	b2	b1	b2	brake)	brake)							screws
39.5	25.5	39.5	39.5	122	161	23	18	2.5	4 h9	12.5 ⁺⁰ _ 0.13	11 k6	M4 x 14

Dimensions in in.


Straigh conneo		Rotata angled connec		c (without brake)	c (with brake)	c1	c2	c3	h	h1	Ø	Ø1 for screws
b1	b2	b1	b2	brake)								
1.55	1	1.55	1.55	4.80	6.33	0.90	0.70	0.09	0.16 h9	0.49 ⁺⁰ _ 0.0051	0.43 k6	M4 x 0.55

Performance Curves

400 V 3-Phase Supply Voltage


Torque/Speed Curves

Servo motor with LXM32•U60N4 servo drive



- X Speed in rpm
- Y Torque in Nm
- 1 Peak torque
- 2 Continuous torque


Servo motor with LXM32•D12N4 servo drive Υ



- X Speed in rpm
- Y Torque in Nm
- 1 Peak torque
- 2 Continuous torque


480 V 3-Phase Supply Voltage

Torque/Speed Curves



- X Speed in rpm
- Y Torque in Nm
- 1 Peak torque
- 2 Continuous torque

Servo motor with LXM32•D12N4 servo drive Υ



- X Speed in rpm
- Y Torque in Nm
- 1 Peak torque
- 2 Continuous torque