



Main

Product or component type	Servo motor
Device short name	BMH
Maximum mechanical speed	4000 rpm
Continuous stall torque	265.49 lbf.in (30 N.m) for LXM32.D72N4 24 A at 400 V three phase 265.49 lbf.in (30 N.m) for LXM32.D72N4 24 A at 480 V three phase 30 N.m for LXM32MD85N4 32 A at 400 V three phase 30 N.m for LXM32MD85N4 32 A at 480 V three phase 30 N.m for LXM32MC10N4 40 A at 400 V three phase 30 N.m for LXM32MC10N4 40 A at 480 V three phase
Peak stall torque	687.61 lbf.in (77.7 N.m) for LXM32.D72N4 24 A at 400 V three phase 687.61 lbf.in (77.7 N.m) for LXM32.D72N4 24 A at 480 V three phase 86.6 N.m for LXM32MD85N4 32 A at 400 V three phase 86.6 N.m for LXM32MD85N4 32 A at 480 V three phase 89.7 N.m for LXM32MC10N4 40 A at 400 V three phase 89.7 N.m for LXM32MC10N4 40 A at 480 V three phase
Nominal output power	4800 W for LXM32.D72N4 24 A at 400 V three phase 4800 W for LXM32.D72N4 24 A at 480 V three phase 5180 W for LXM32MD85N4 32 A at 400 V three phase 5180 W for LXM32MD85N4 32 A at 480 V three phase 5180 W for LXM32MC10N4 40 A at 400 V three phase 5180 W for LXM32MC10N4 40 A at 480 V three phase
Nominal torque	18.4 N.m for LXM32.D72N4 24 A at 400 V three phase 18.4 N.m for LXM32.D72N4 24 A at 480 V three phase 16.5 N.m for LXM32MD85N4 32 A at 400 V three phase 16.5 N.m for LXM32MD85N4 32 A at 480 V three phase 16.5 N.m for LXM32MC10N4 40 A at 400 V three phase 16.5 N.m for LXM32MC10N4 40 A at 480 V three phase
Nominal speed	2500 rpm LXM32.D72N4 24 A at 400 V three phase 2500 rpm LXM32.D72N4 24 A at 480 V three phase 3000 rpm for LXM32MD85N4 32 A at 400 V three phase 3000 rpm for LXM32MD85N4 32 A at 480 V three phase 3000 rpm for LXM32MC10N4 40 A at 400 V three phase 3000 rpm for LXM32MC10N4 40 A at 480 V three phase
Product compatibility	LXM32.D72N4 at 400...480 V three phase

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Shaft end	Keyed
IP degree of protection	IP65 (standard) IP67 (with IP67 kit)
Speed feedback resolution	131072 points/turn
Holding brake	Without
Mounting support	International standard flange
Electrical connection	Rotatable right-angled connectors

Complementary


Range compatibility	Lexium 32
[Us] rated supply voltage	480 V
Phase	Three phase
Continuous stall current	23.2 A
Continuous power	5.24 W
Maximum current I _{rms}	72 A LXM32.D72N4
Maximum permanent current	89.6 A
Second shaft	Without second shaft end
Shaft diameter	1.5 in (38 mm)
Shaft length	3.15 in (80 mm)
Key width	2.76 in (70 mm)
Feedback type	Single turn SinCos Hiperface
Motor flange size	7.48 in (190 mm)
Number of motor stacks	1
Torque constant	1.3 N.m/A at 248 °F (120 °C)
Back emf constant	87.6 V/krpm at 248 °F (120 °C)
Number of motor poles	10
Rotor inertia	67.7 kg.cm ²
Stator resistance	0.24 Ohm at 68 °F (20 °C)
Stator inductance	5.08 mH at 68 °F (20 °C)
Stator electrical time constant	21.2 ms at 68 °F (20 °C)
Maximum radial force Fr	3730 N at 1000 rpm
Maximum axial force Fa	0.2 x Fr
Type of cooling	Natural convection
Length	7.48 in (190 mm)
Centring collar diameter	7.09 in (180 mm)
Centring collar depth	0.16 in (4 mm)
Number of mounting holes	4
Mounting holes diameter	0.55 in (14 mm)
Circle diameter of the mounting holes	8.46 in (215 mm)
Product weight	41.89 lb(US) (19 kg)

Environment

Offer Sustainability

Green Premium product	Green Premium product
Compliant - since 1101 - Schneider Electric declaration of conformity	Compliant - since 1101 - Schneider Electric declaration of conformity
Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold
Available	Available
Need no specific recycling operations	Need no specific recycling operations

Servo Motors Dimensions

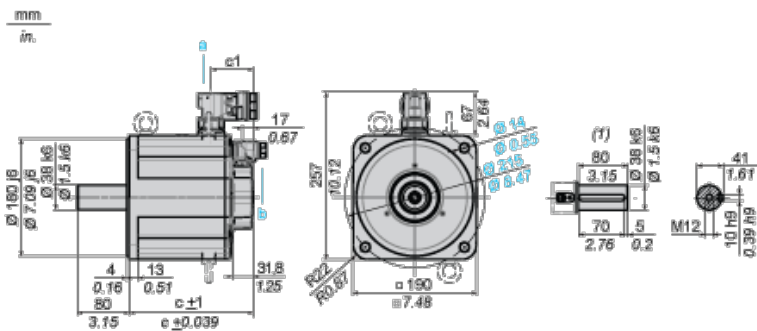

- a Power supply for servo motor brake
- b Power supply for servo motor encoder
- (1) Shaft end, keyed slot (optional)

Dimensions in mm

c (without brake)	c (with brake)	c1 (without brake)	c1 (with brake)
190	248	65	123


Dimensions in in.

c (without brake)	c (with brake)	c1 (without brake)	c1 (with brake)
7.48	9.76	2.56	4.84

Torque/Speed Curves

400 V 3-Phase Supply Voltage


Servo motor with LXM32•D72N4 servo drive

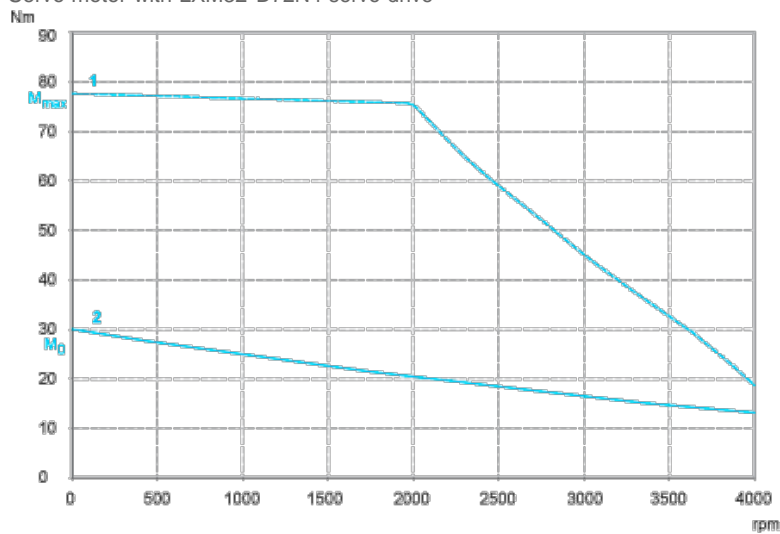

- (1) Peak torque
- (2) Continuous torque

480 V 3-Phase Supply Voltage

Servo motor with LXM32•D72N4 servo drive

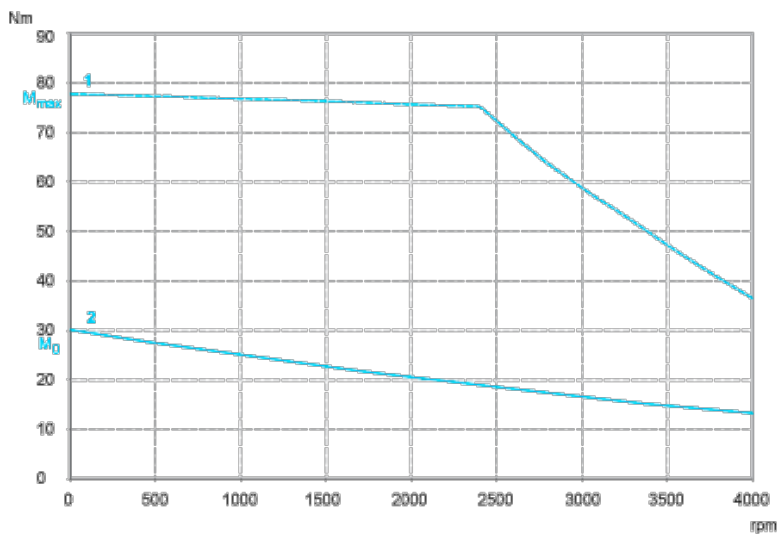

- (1) Peak torque
- (2) Continuous torque