Product datasheet

Specifications





analog non isolated high level output module, Modicon X80, 8 outputs, 0 to 20mA, 4 to 20mA

BMXAMO0802

Main

Range of product	Modicon X80	
Product or component type	Analog output module	
Electrical connection	20 ways 1 connector	
Isolation between channels	Non isolated	

Complementary

Complementary	
Analogue input resolution	16 bits
Measurement error	<= 0.25 % of full scale 060 °C 0.1 % of full scale 25 °C
Temperature drift	45 ppm/°C 020 mA 45 ppm/°C 420 mA
Minimum crosstalk attenuation	80 dB
Common mode rejection	80 dB
Isolation voltage	1400 V DC between channels and ground 1400 V DC between channels and bus
Detection type	Open circuit 420 mA Short circuit 020 mA
Load impedance ohmic	<= 350 Ohm 020 mA <= 350 Ohm 420 mA
Output level	High level
Analogue output number	8
Analogue output type	Current: 020 mA Current: 420 mA
Analogue output resolution	16 bits
Supply	Internal power supply via rack
Conversion time	<= 4 ms
Maximum conversion value	021 mA 020 mA 021 mA 420 mA
Fallback mode	Configurable Predefined
MTBF reliability	1500000 H
Operating altitude	02000 m 20005000 m with derating factor
Status LED	1 LED (green) RUN 1 LED per channel (green) channel diagnostic 1 LED (red) ERR 1 LED (red) I/O

Net weight	0.15 kg
Power consumption in W	3.6 W 24 V DC typical 3.9 W 24 V DC maximum 0.35 W 3.3 V DC typical 0.48 W 3.3 V DC maximum
Current consumption	150 mA at 3.3 V DC 135 mA at 24 V DC

Environment

Vibration resistance	3 gn
Shock resistance	30 gn
ambient air temperature for storage	-4085 °C
Ambient air temperature for operation	060 °C
Relative humidity	595 % at 55 °C without condensation
IP degree of protection	IP20
Directives	2014/35/EU - low voltage directive 2014/30/EU - electromagnetic compatibility
Product certifications	CE RCM CSA EAC Merchant Navy UL
Standards	EN/IEC 61010-2-201 EN/IEC 61131-2 UL 61010-2-201 CSA C22.2 No 61010-2-201

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.300 cm
Package 1 Width	11.000 cm
Package 1 Length	11.600 cm
Package 1 Weight	169.000 g
Unit Type of Package 2	S02
Number of Units in Package 2	15
Package 2 Height	15.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	2.650 kg

Contractual warranty

Warranty 18 months



Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance



Mercury Free



Rohs Exemption Information

Yes


Certifications & Standards

Reach Regulation	REACh Declaration		
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)		
China Rohs Regulation	China RoHS declaration		
Environmental Disclosure	Product Environmental Profile		
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins		
Circularity Profile	End of Life Information		

Dimensions Drawings

Modules Mounted on Racks

Dimensions

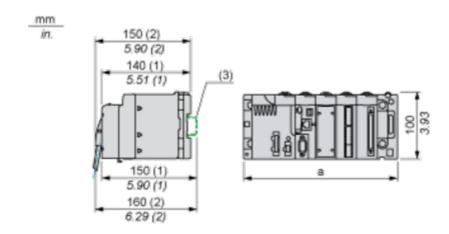


- (1) With removable terminal block (cage, screw or spring).
- (2) With FCN connector.
- (3) On AM1 ED rail: 35 mm wide, 15 mm deep. Only possible with BMXXBP0400/0400H/0600/0600H/0800/0800H rack.

Rack references	a in mm	a in in.
BMXXBP0400 and BMXXBP0400H	242.4	09.54
BMXXBP0600 and BMXXBP0600H	307.6	12.11
BMXXBP0800 and BMXXBP0800H	372.8	14.68
BMXXBP1200 and BMXXBP1200H	503.2	19.81

BMXAMO0802

Connections and Schema

Wiring Diagram

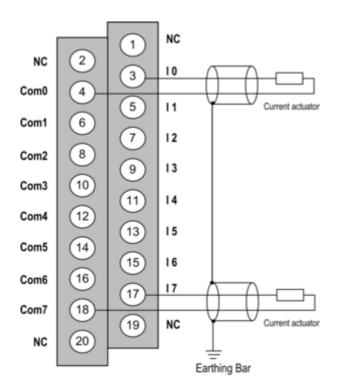

Ix + pole input for channel x.

COMx - pole input for channel x, COMx are connected together internally.

The current loop is self-powered by the output and does not request any external supply.