

# Product datasheet

Specifications



network module, Modicon M340, Modbus/TCP, 1 x RJ45, flash memory card, for severe environments

BMXNOE0100H

## Main

Range of product	Modicon M340 automation platform
Product or component type	Ethernet TCP/IP network module
Product specific application	For severe environments
Concept	Transparent Ready
Integrated connection type	Ethernet TCP/IP RJ45 10/100 Mbit/s 1 twisted pair transparent ready class B30
protective treatment	Conformal coating

## Complementary

Communication service	Bandwidth management Data Editor (via PC terminal) FDR server Rack Viewer SNMP network administrator Global Data I/O scanning Modbus TCP messaging Web server configurable
Port Ethernet	10BASE-T/100BASE-TX
Memory description	Supplied Flash memory card (BMXRWSC016M)
Memory usage	Application saving Activating the standard web server
Supply	Internal power supply via rack
Marking	CE
Local signalling	1 LED (green) for activity on Ethernet network (ETH ACT) 1 LED (green) for processor running (RUN) 1 LED (green) for status of Ethernet network (ETH STS) 1 LED (red) for data rate (ETH 100) 1 LED (red) for memory card fault (CARD ERR) 1 LED (red) for processor or system fault (ERR)
Control type	RESET push-button cold restart
Current consumption	90 mA at 24 V DC
Module format	Standard
Net weight	0.2 kg

## Environment

Ambient air temperature for operation	-25...70 °C
Relative humidity	10...95 % without condensation
IP degree of protection	IP20

<b>Directives</b>	2014/35/EU - low voltage directive 2014/30/EU - electromagnetic compatibility 2014/34/EU - ATEX directive
<b>Product certifications</b>	CE UL CSA RCM EAC Merchant Navy ATEX zone 2/22 IECEx zone 2/22
<b>Standards</b>	IEC 61131-2 IEC 61010-2-201 UL 61010-2-201 CSA C22.2 No 61010-2-201 IACS E10 IEC 61000-6-5, interface type 1 and type 2 IEC 61850-3, location G IEC 60079-0
<b>Environmental characteristic</b>	Gas resistant class Gx conforming to ISA S71.04 Gas resistant class 3C4 conforming to IEC 60721-3-3 Dust resistant class 3S4 conforming to IEC 60721-3-3 Sand resistant class 3S4 conforming to IEC 60721-3-3 Salt resistant level 2 conforming to IEC 68252 Mold growth resistant class 3B2 conforming to IEC 60721-3-3 Fungal spore resistant class 3B2 conforming to IEC 60721-3-3 Hazardous location class I division 2

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Height</b>	5.500 cm
<b>Package 1 Width</b>	11.000 cm
<b>Package 1 Length</b>	12.000 cm
<b>Package 1 Weight</b>	246.000 g
<b>Unit Type of Package 2</b>	S02
<b>Number of Units in Package 2</b>	15
<b>Package 2 Height</b>	15.000 cm
<b>Package 2 Width</b>	30.000 cm
<b>Package 2 Length</b>	40.000 cm
<b>Package 2 Weight</b>	3.705 kg

## Contractual warranty

<b>Warranty</b>	18 months
-----------------	-----------

## Sustainability

**Green Premium™ label** is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

## Well-being performance

Mercury Free

RoHS Exemption Information Yes

## Certifications & Standards

Reach Regulation [REACH Declaration](#)

Eu RoHS Directive Pro-active compliance (Product out of EU RoHS legal scope)

China RoHS Regulation [China RoHS declaration](#)

Environmental Disclosure [Product Environmental Profile](#)


Weee The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Circularity Profile [End of Life Information](#)

Dimensions Drawings

Modules Mounted on Racks

Dimensions

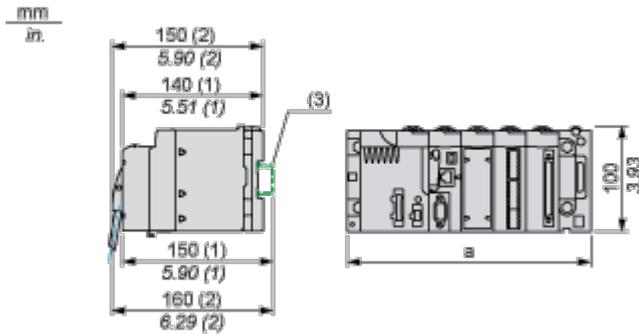

- (1) With removable terminal block (cage, screw or spring).
- (2) With FCN connector.
- (3) On AM1 ED rail: 35 mm wide, 15 mm deep. Only possible with BMXXBP0400/0400H/0600/0600H/0800/0800H rack.

Rack references	a in mm	a in in.
BMXXBP0400 and BMXXBP0400H	242.4	09.54
BMXXBP0600 and BMXXBP0600H	307.6	12.11
BMXXBP0800 and BMXXBP0800H	372.8	14.68
BMXXBP1200 and BMXXBP1200H	503.2	19.81