# **Product datasheet**





# AC servo motor BSH, Lexium 05, 2.7N.m, 3000rpm, keyed shaft, with brake, IP65

BSH1001P32F1A

! Discontinued on: 01-Nov-2020

! Discontinued

| Main                      |  |  |  |  |  |  |  |
|---------------------------|--|--|--|--|--|--|--|
| Device short name         | BSH  |  |  |  |  |  |  |
| Product or component type | Servo motor  |  |  |  |  |  |  |
| Maximum mechanical speed  | 6000 rpm   |  |  |  |  |  |  |
| Continuous stall torque   | 3.39 N.m for LXM15LD21M3, 230 V, single phase 2.7 N.m for LXM15LD10N4, 230 V, three phase 3.39 N.m for LXM15LD10N4, 400 V, three phase 3.39 N.m for LXM15LD10N4, 480 V, three phase  |  |  |  |  |  |  |
|                           | 3.39 N.m for LXM15LD21M3, 230 V, three phase<br>3.39 N.m for LXM15LD17N4, 230 V, three phase<br>3.39 N.m for LXM15LD17N4, 400 V, three phase<br>3.39 N.m for LXM15LD17N4, 480 V, three phase   |  |  |  |  |  |  |
|                           | 3.4 N.m for LXM05AD17M3X, 200240 V, three phase<br>3.4 N.m for LXM05AD22N4, 380480 V, three phase<br>3.4 N.m for LXM05BD17M3X, 200240 V, three phase<br>3.4 N.m for LXM05BD22N4, 380480 V, three phase   |  |  |  |  |  |  |
|                           | 3.4 N.m for LXM05CD17M3X, 200240 V, three phase<br>3.4 N.m for LXM05CD22N4, 380480 V, three phase<br>3.3 N.m for LXM32.D18N4 at 6 A, 400 V, three phase<br>3.3 N.m for LXM32.D18N4 at 6 A, 480 V, three phase  |  |  |  |  |  |  |
| Peak stall torque         | 7.08 N.m for LXM15LD21M3, 230 V, single phase 6.19 N.m for LXM15LD10N4, 230 V, three phase 6.19 N.m for LXM15LD10N4, 400 V, three phase 6.19 N.m for LXM15LD10N4, 480 V, three phase 7.08 N.m for LXM15LD21M3, 230 V, three phase 7.08 N.m for LXM15LD17N4, 230 V, three phase 7.08 N.m for LXM15LD17N4, 400 V, three phase  |  |  |  |  |  |  |
|                           | 7.08 N.m for LXM15LD17N4, 480 V, three phase 7.1 N.m for LXM05AD17M3X, 200240 V, three phase 7.1 N.m for LXM05AD22N4, 380480 V, three phase 7.1 N.m for LXM05BD17M3X, 200240 V, three phase 7.1 N.m for LXM05BD22N4, 380480 V, three phase 7.1 N.m for LXM05BD22N4, 380480 V, three phase 7.1 N.m for LXM05CD17M3X, 200240 V, three phase 7.1 N.m for LXM05CD22N4, 380480 V, three phase 9.6 N.m for LXM32.D18N4 at 6 A, 400 V, three phase 9.6 N.m for LXM32.D18N4 at 6 A, 480 V, three phase   |  |  |  |  |  |  |
| Nominal output power      | 1300 W for LXM15LD17N4, 400 V, three phase 1500 W for LXM15LD10N4, 480 V, three phase 950 W for LXM15LD21M3, 230 V, single phase 1300 W for LXM15LD10N4, 400 V, three phase 1500 W for LXM15LD10N4, 480 V, three phase 1500 W for LXM05AD17N4, 480 V, three phase 500 W for LXM05AD17M3X, 200240 V, three phase 500 W for LXM05BD17M3X, 200240 V, three phase 500 W for LXM05CD17M3X, 200240 V, three phase 850 W for LXM05CD17M3X, 20V, three phase 900 W for LXM05AD22N4, 380480 V, three phase 900 W for LXM05BD22N4, 380480 V, three phase 900 W for LXM05CD22N4, 380480 V, three phase 950 W for LXM15LD17N4, 230 V, three phase 950 W for LXM15LD21M3, 230 V, three phase 1100 W for LXM3LD18N4 at 6 A, 400 V, three phase |  |  |  |  |  |  |

1100 W for LXM32.D18N4 at 6 A, 480 V, three phase

Life Is On Schneider 04-Sept-2024

| Nominal torque            | 3 N.m for LXM15LD21M3, 230 V, single phase  |
|---------------------------|---|
|                           | 2.5 N.m for LXM15LD10N4, 480 V, three phase   |
|                           | 2.5 N.m for LXM15LD17N4, 480 V, three phase 2.7 N.m for LXM15LD10N4, 230 V, three phase         |
|                           | 2.7 N.m for LXM15LD10N4, 400 V, three phase   |
|                           | 2.7 N.m for LXM15LD17N4, 400 V, three phase   |
|                           | 2.92 N.m for LXM05AD22N4, 380480 V, three phase   |
|                           | 2.92 N.m for LXM05BD22N4, 380480 V, three phase   |
|                           | 2.92 N.m for LXM05CD22N4, 380480 V, three phase   |
|                           | 3 N.m for LXM15LD17N4, 230 V, three phase 3 N.m for LXM15LD21M3, 230 V, three phase             |
|                           | 3.16 N.m for LXM05AD17M3X, 200240 V, three phase  |
|                           | 3.16 N.m for LXM05BD17M3X, 200240 V, three phase  |
|                           | 3.16 N.m for LXM05CD17M3X, 200240 V, three phase  |
|                           | 2.7 N.m for LXM32.D18N4 at 6 A, 400 V, three phase  |
|                           | 2.7 N.m for LXM32.D18N4 at 6 A, 480 V, three phase  |
| Nominal speed             | 3000 rpm for LXM15LD10N4, 230 V, three phase  |
|                           | 3000 rpm for LXM15LD21M3, 230 V, single phase   |
|                           | 3000 rpm for LXM05AD22N4, 380480 V, three phase   |
|                           | 3000 rpm for LXM05BD22N4, 380480 V, three phase   |
|                           | 3000 rpm for LXM05CD22N4, 380480 V, three phase<br>3000 rpm for LXM15LD17N4, 230 V, three phase |
|                           | 3000 rpm for LXM15LD21M3, 230 V, three phase  |
|                           | 1500 rpm for LXM05AD17M3X, 200240 V, three phase  |
|                           | 1500 rpm for LXM05BD17M3X, 200240 V, three phase  |
|                           | 1500 rpm for LXM05CD17M3X, 200240 V, three phase  |
|                           | 4500 rpm for LXM15LD10N4, 400 V, three phase  |
|                           | 4500 rpm for LXM15LD17N4, 400 V, three phase  |
|                           | 6000 rpm for LXM15LD10N4, 480 V, three phase  |
|                           | 6000 rpm for LXM15LD17N4, 480 V, three phase  |
|                           | 4000 rpm for LXM32.D18N4 at 6 A, 400 V, three phase   |
|                           | 4000 rpm for LXM32.D18N4 at 6 A, 480 V, three phase   |
| Product compatibility     | LXM15LD21M3 at 230 V single phase   |
|                           | LXM15LD10N4 at 400 V three phase  |
|                           | LXM05AD17M3X at 200240 V three phase  |
|                           | LXM05BD17M3X at 200240 V three phase  |
|                           | LXM05CD17M3X at 200240 V three phase<br>LXM15LD10N4 at 230 V three phase                        |
|                           | LXM15LD10N4 at 480 V three phase  |
|                           | LXM15LD21M3 at 230 V three phase  |
|                           | LXM15LD17N4 at 230 V three phase  |
|                           | LXM05AD22N4 at 380480 V three phase   |
|                           | LXM05BD22N4 at 380480 V three phase   |
|                           | LXM05CD22N4 at 380480 V three phase   |
|                           | LXM15LD17N4 at 400 V three phase  |
|                           | LXM15LD17N4 at 480 V three phase  |
|                           | LXM32.D18N4 at 400 V three phase<br>LXM32.D18N4 at 480 V three phase                            |
| Shaft end                 | Keyed   |
| ID dograp of protection   | , IDDE ( ) I I  |
| IP degree of protection   | IP65 standard IP67 with IP67 kit  |
| Speed feedback resolution | 131072 points/turn x 4096 turns   |
| Holding brake             | With  |
|                           | ·   |
| mounting support          | International standard flange   |
| Electrical connection     | Straight connectors   |
|                           |   |
| Complementary             |   |
| Range compatibility       | Lexium 15   |
|                           | Lexium 32   |
|                           | Lexium 05   |
| supply voltage max        | 480 V   |
| Network number of phases  | Three phase   |
| Continuous stall current  | 3.5 A   |
| maximum continuous nower  | 1.6 W   |
| maximum continuous power  |   |

| Maximum current Irms                  | 12 A for LXM15LD21M3 12 A for LXM15LD10N4 12 A for LXM05AD17N4 12 A for LXM05AD17M3X 12 A for LXM05AD22N4 12 A for LXM05BD17M3X 12 A for LXM05BD22N4 12 A for LXM05BD22N4 12 A for LXM05CD17M3X 12 A for LXM05CD17M3X 12 A for LXM05CD17M3X 14 A for LXM05CD17M3X 15 A for LXM05CD17M3X |
|---------------------------------------|---|
| Maximum permanent current             | 12 A  |
| Switching frequency                   | 8 kHz   |
| Second shaft                          | Without second shaft end  |
| Shaft diameter                        | 19 mm   |
| Shaft length                          | 40 mm   |
| Key width                             | 30 mm   |
| Feedback type                         | Multiturn SinCos Hiperface  |
| Holding torque                        | 9 N.m holding brake   |
| Motor flange size                     | 100 mm  |
| Number of motor stacks                | 1   |
| Torque constant                       | 0.89 N.m/A at 120 °C  |
| Back emf constant                     | 60 V/krpm at 120 °C   |
| Number of motor poles                 | 8   |
| Rotor inertia                         | 2.018 kg.cm <sup>2</sup>  |
| Stator resistance                     | 3.8 Ohm at 20 °C  |
| Stator inductance                     | 17.6 mH at 20 °C  |
| Stator electrical time constant       | 4.63 ms at 20 °C  |
| Maximum radial force Fr               | 530 N at 5000 rpm<br>570 N at 4000 rpm<br>630 N at 3000 rpm<br>720 N at 2000 rpm<br>900 N at 1000 rpm   |
| Maximum axial force Fa                | 0.2 x Fr  |
| Brake pull-in power                   | 18 W  |
| Type of cooling                       | Natural convection  |
| Length                                | 199.5 mm  |
| Centring collar diameter              | 95 mm   |
| Centring collar depth                 | 3.5 mm  |
| Number of mounting holes              | 4   |
| Mounting holes diameter               | 9 mm  |
| Circle diameter of the mounting holes | 115 mm  |
| Net weight                            | 4.8 kg  |
| Packing Units                         |   |
| Unit Type of Package 1                | PCE   |
| Number of Units in Package 1          | 1   |

15.4 cm

Package 1 Height

| Package 1 Width  | 16.3 cm |  |
|------------------|---------|--|
| Package 1 Length | 40.7 cm |  |
| Package 1 Weight | 4 95 kg |  |

# **Contractual warranty**

Warranty 18 months



**Green Premium**<sup>TM</sup> **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

## Well-being performance

|          | Mercury Free               |     |
|----------|----------------------------|-----|
| <b>⊘</b> | Rohs Exemption Information | Yes |
|          | Pvc Free                   |     |

### **Certifications & Standards**


| Eu Rohs Directive               | Pro-active compliance (Product out of EU RoHS legal scope)  |
|---------------------------------|---|
| China Rohs Regulation           | China RoHS declaration  |
| <b>Environmental Disclosure</b> | Product Environmental Profile   |
| Weee                            | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |
| Circularity Profile             | No need of specific recycling operations  |

# BSH1001P32F1A

### **Dimensions Drawings**

#### **Servo Motors Dimensions**

### **Example with Straight Connectors**

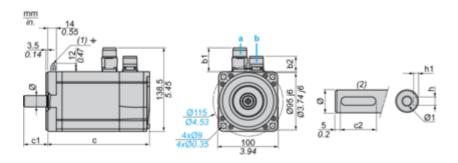

- a: Power supply for servo motor brake
- **b**: Power supply for servo motor encoder
- (1) M4 screw
- (2) Shaft end, keyed slot (optional)

Dimensions in mm

| Straight connectors |      | Rotatable angled connectors |      | c (without | c (with | c1 | c2 | h       | h1                               | Ø        | Ø1 for  |
|---------------------|------|-----------------------------|------|------------|---------|----|----|---------|----------------------------------|----------|---------|
| b1                  | b2   | b1                          | b2   | brake)     | brake)  |    |    |         |                                  |          | screws  |
| 39.5                | 25.5 | 39.5                        | 39.5 | 169        | 200     | 40 | 30 | 6<br>N9 | 3.5 <sup>+0.1</sup> <sub>0</sub> | 19<br>k6 | M6 x 16 |

Dimensions in in.

| Straight Rotatable angled connectors connectors |      | c (without c (with brake) | c1 ( | c2     | h      | h1   | Ø    | Ø1 for     |                        |            |              |
|---|------|---------------------------|------|--------|--------|------|------|------------|------------------------|------------|--------------|
| b1  | b2   | b1                        | b2   | brake) | brake) |      |      |            |                        |            | screws       |
| 1.55  | 1.00 | 1.55                      | 1.55 | 6.65   | 7.87   | 1.57 | 1.18 | 0.24<br>N9 | 0.14 <sup>+0.1</sup> 0 | 0.75<br>k6 | M6 x<br>0.63 |

# **Product datasheet**


# BSH1001P32F1A

#### Performance Curves

# 400 V 3-Phase Supply Voltage

### **Torque/Speed Curves**

Servo motor with LXM32•D18N4 servo drive




- **X** Speed in rpm
- Y Torque in Nm
- 1 Peak torque
- 2 Continuous torque

### 480 V 3-Phase Supply Voltage

#### **Torque/Speed Curves**

Servo motor with LXM32•D18N4 servo drive



- X Speed in rpm
- ${\bf Y}$  Torque in Nm
- 1 Peak torque
- 2 Continuous torque