



Magnetically latched lighting contactor
60 Amp
10NO / 0NC Poles
Maximum voltage rating 600VAC
Control voltage 220/240VAC 50/60Hz
Open device (no enclosure)




Image is representative and may not depict the actual product.

General technical data:	
Weight	10 lb
Height x Width x Depth	5.87 x 11.75 x 5.19 in.
Finger-safe (main circuit / control circuit)	No / No
Maximum altitude	6560 ft
Ambient storage temperature	(no data)
Ambient operating temperature	(no data)
Humidity (% non-condensing)	(no data)
Country of origin	USA
Contactors:	
Number of poles	10NO / 0NC
Mechanical operating cycles	10,000,000
Current ratings:	
Tungsten (poles per phase)	60A @277V 1p 1ph 60A @480V 2p 1ph 60A @480V 3p 3ph
Ballast (poles per phase)	60A @347V 1p 1ph 60A @600V 2p 1ph 60A @600V 3p 3ph
General & resistive (poles per phase)	60A @347V 1p 1ph 60A @600V 2p 1ph 60A @600V 3p 3ph
Internal/standard auxiliary contact:	
Number of NC / NO auxiliary contacts	0NC / 0NO
Rating	NA
Optional auxiliary contact:	
Max number of NC / NO auxiliary contacts	4 max NC/NO combination
Rating	10A@600VAC (A600), 1A@300VDC (R300)
Coil:	
Voltage	220/240V 50/60Hz Coil
Sealed watts	(no data)
Inrush / sealed power	1200 / 80 VA
Normal coil operating limits (% of rated voltage)	85% - 110%
Typical drop-out volts (% of rated voltage)	(no data)
Pick-up time / Drop-out time	(no data)
Disconnect type (none):	
Rating	NA
Fuse type accepted	NA

Enclosure:	
Type	Open device (no enclosure)
Rating	NA
Mounting/wiring:	
Mounting orientation	Vertical
Mounting type	Surface
Line side connection type / torque	Box lug / 45 - 50 lb-in.
Line side solid & stranded conductors	14 - 4 AWG 75°C AL or CU
Load side connection type / torque	Box lug / 45 - 50 lb-in.
Load side solid & stranded conductors	14 - 4 AWG 75°C AL or CU
Coil connection type / torque	Screw / 8 - 12 lb in.
Coil solid & stranded conductors	2 x (16 - 12 AWG) CU 75°C
Main auxiliary contact connection type / torque	NA
Main auxiliary contact solid & stranded conductors	NA
Short circuit current rating:	
Fuses	none
Thermal magnetic circuit breaker	5kA@600V (60A max CB)
Additional information:	
	Brochure

Open Plate Mounted CLM 60A 10 Pole

E87010-A0443-T006-A1-CLM

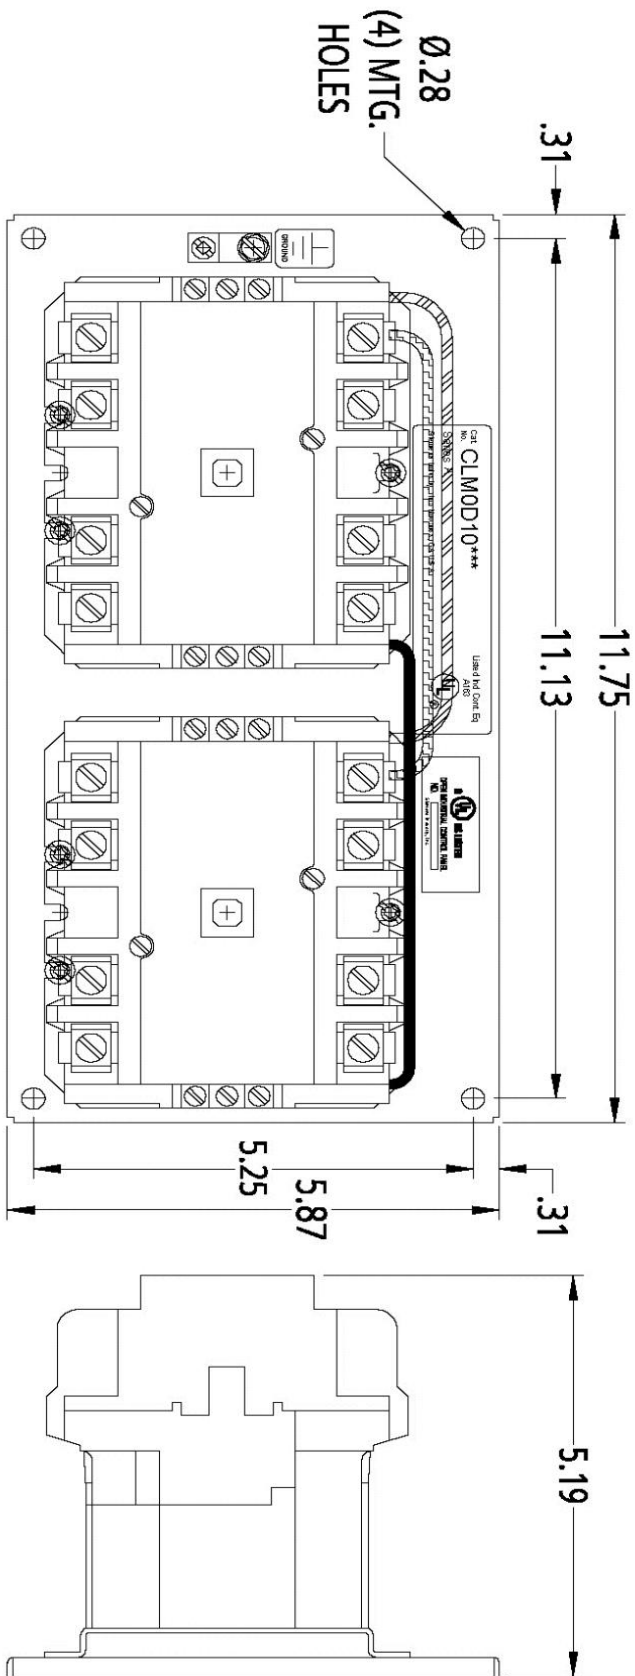

DIMENSIONS ARE IN INCHES.

REF: D70695, Fig. 15

Wiring Diagram Class CLM 30-60 Amp 10 Pole

