


E2E-S05S12-WC-C1 5M

Product description	M5 1.2MM PW NPN NO
RoHs Status	Lead free / RoHS Compliant
Stock Condition	983 pcs stock
Ship From	Hong Kong
Shipment Way	DHL/Fedex/TNT/UPS/EMS

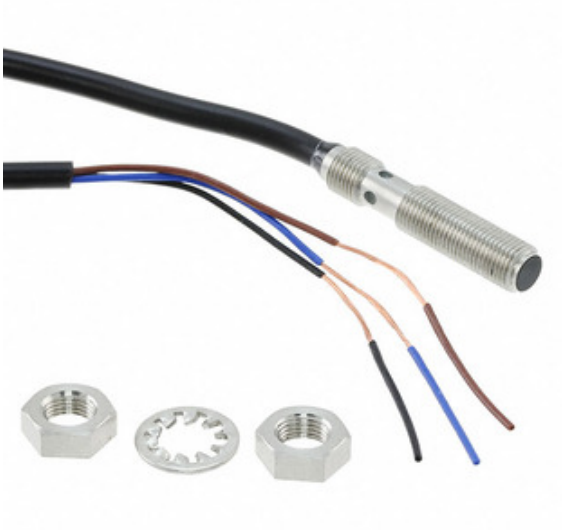

Specifications E2E-S05S12-WC-C1 5M

PART NUMBER	E2E-S05S12-WC-C1 5M
MANUFACTURER	Omron Automation & Safety
DESCRIPTION	M5 1.2MM PW NPN NO
LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
QUANTITY AVAILABLE	983 pcs
DATA SHEET	
VOLTAGE - SUPPLY	10 V ~ 30 V
TERMINATION STYLE	Cable Leads
SHIELDING	Shielded
SERIES	E2E
SENSOR TYPE	Inductive
SENSING DISTANCE	0.047" (1.2mm)
RESPONSE FREQUENCY	4kHz
PACKAGE / CASE	Cylinder, Threaded - M5
OUTPUT TYPE	NPN-NO, 3-Wire
OTHER NAMES	E2E-S05S12-WC-C1 5M-ND E2E-S05S12-WC-C15M E2E-S05S12-WC-C15M-ND E2ES05S12WCC15M Z9176
OPERATING TEMPERATURE	-25°C ~ 70°C
MOISTURE SENSITIVITY LEVEL (MSL)	1 (Unlimited)
MATERIAL - BODY	Stainless Steel
LEAD FREE STATUS / ROHS STATUS	Contains lead / RoHS non-compliant
INGRESS PROTECTION	IP67
INDICATOR	LED
DETAILED DESCRIPTION	Inductive Proximity Sensor 0.047" (1.2mm) IP67 Cylinder, Threaded - M5