


Super-compact Proximity Sensor

E2S-W21B 5M

Unshielded, Square type, DC 2-wire models, Sensing distance 2.5 mm ±15%, NO, Different frequency, Pre-wired models, Sensing surface Top panel

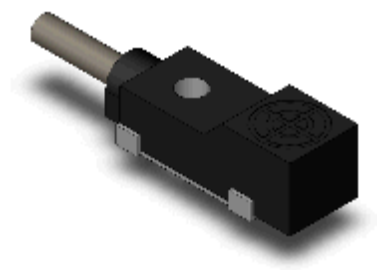

Image

Ratings/Performance

As of July 16, 2020

Sensing head size	8 mm x 7.4 mm x 20 mm
Type	Square type, Unshielded, Different frequency type
Power source	DC 2-wire models
Sensing distance	2.5 mm ±15%
Setting distance	0 to 1.9 mm
Differential distance	10% max. of sensing distance
Sensing object	Ferrous metal (Sensitivity lowers with non-ferrous metals.)
Standard sensing object	Iron 15 x 15 x 1 mm
Response frequency	1 kHz (Average value)
Power supply voltage	12 to 24 VDC ripple (p-p) 10% max.
Operating voltage range	10 to 30 VDC
Leakage current	0.8 mA max.
Control output (Switching capacity)	3 to 50 mA
Indicator	Operation indicator (red), Operation setting indicator (green)
Operation mode	NO
Protective circuit	Power supply reverse polarity protection Surge suppressor
Ambient temperature (Operating)	-25 to 70 °C
Ambient temperature (Storage)	-40 to 85 °C
Ambient humidity (Operating)	35 to 90% RH
Ambient humidity (Storage)	35 to 95% RH
Temperature influence	±15% max. of sensing distance at 23 °C in the temperature range of -25 to 70 °C
Voltage influence	±2.5% max. of sensing distance at rated voltage in the rated voltage ±10% range
Insulation resistance	Between charged parts and the case: 5 MΩ min. at 500 VDC


Dielectric strength	Between charged parts and the case: 1,000 VAC 50/60 Hz 1 min
Vibration resistance	Destruction: 10 to 55 Hz, 1.5 mm double amplitude each in X, Y, and Z directions for 2 h
Shock resistance	Destruction: 500 m/s ² 3 times each in X, Y and Z directions
Degree of protection	IEC: IP67
Connection method	Pre-wired models (5 m)
Material	Case: Polyarylate
Accessories	Mounting Bracket

As of July 16, 2020

Dimensions

As of July 16, 2020

Dimensions

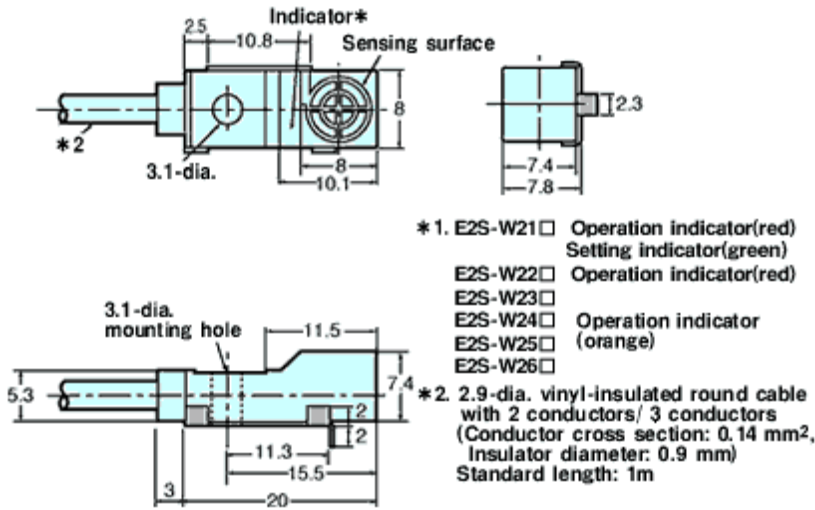


As of July 16, 2020

Output circuit


As of July 16, 2020

Output circuit

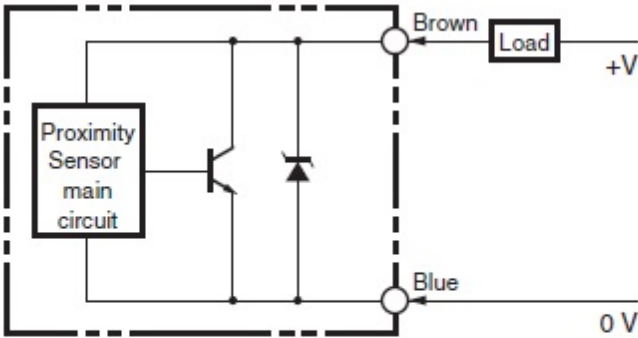

Note: The load can be connected to either the +V or 0 V side.

Timing chart

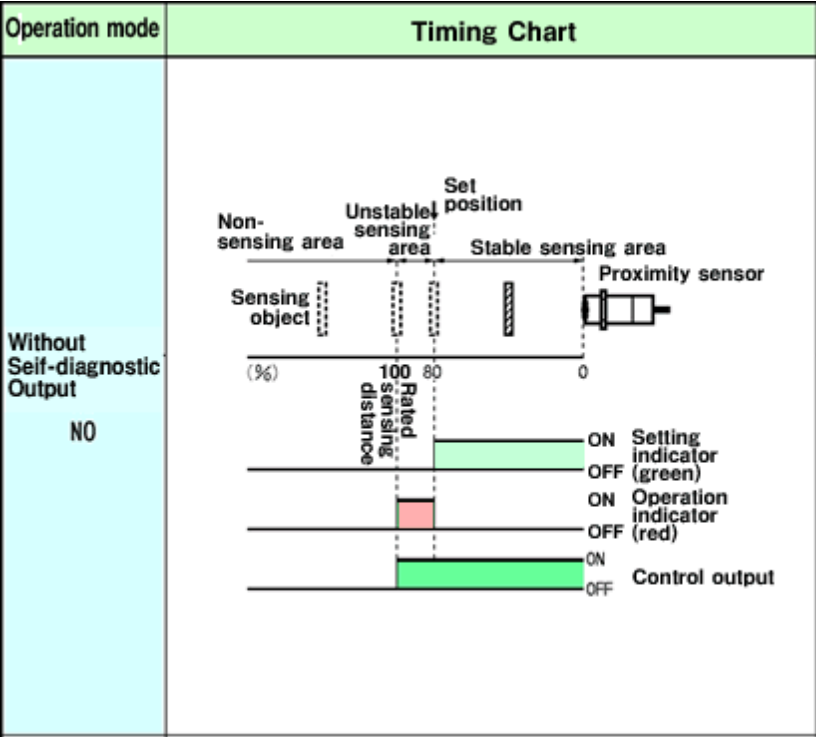


As of July 16, 2020

Mutual interference

As of July 16, 2020

Mutual interference

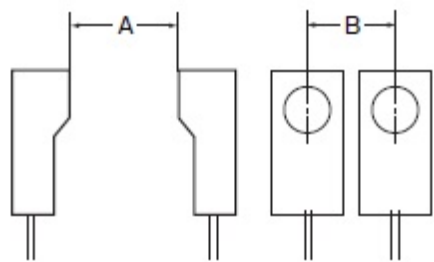

Different frequency


A: 50 mm min., B: 8 mm min.

As of July 16, 2020

Effects of surrounding metals

As of July 16, 2020

Effects of surrounding metals

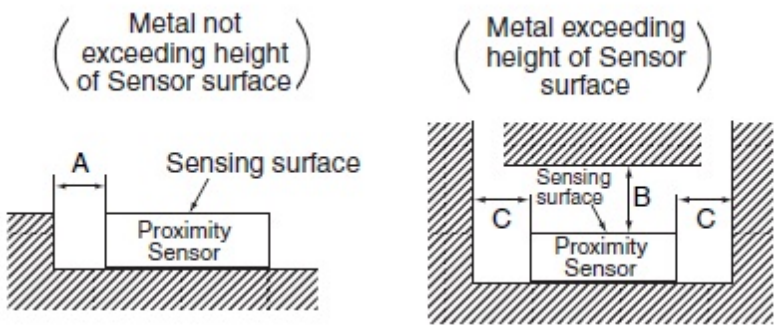

A: 0 mm min., B: 15 mm min., C: 10 mm min.


As of July 16, 2020

Characteristic chart


As of July 16, 2020

Sensing distance vs. size and material of sensing object

E2S-W2□/-Q2□

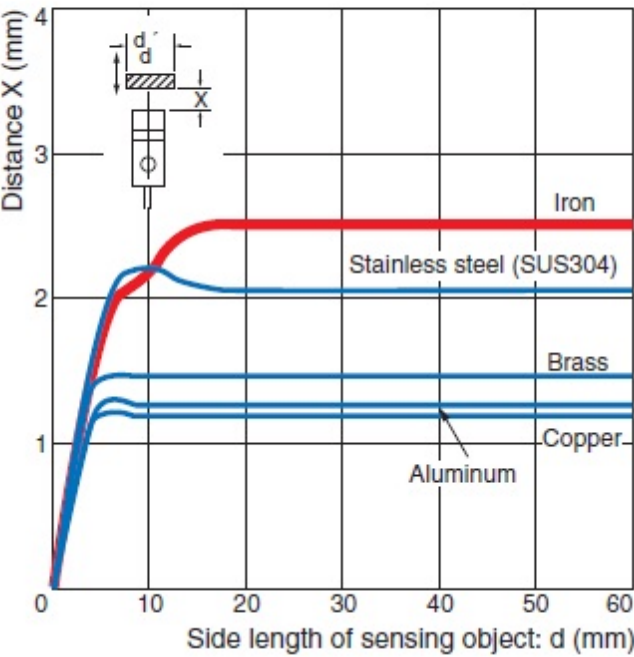

Sensing range

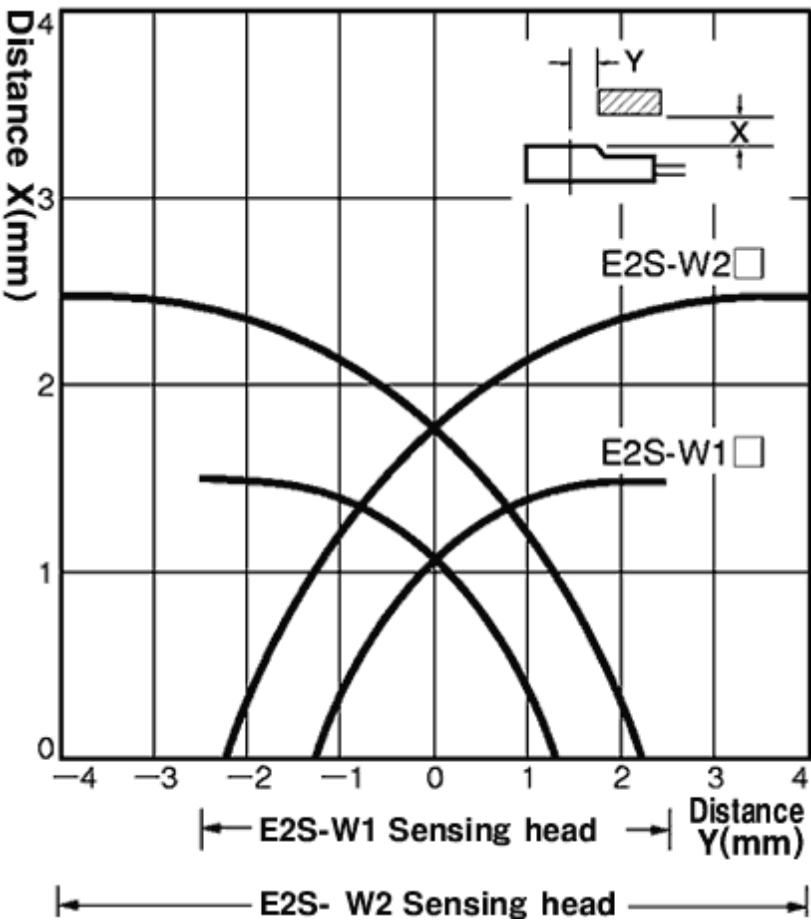

As of July 16, 2020