

Rotary Encoder Accessories

E69

Accessories

Couplings

Coupling Materials and Characteristics

OMRON provides two types of couplings for different application conditions: Resin and metal. Select the best type for the application.

As a general rule, use metal couplings for high resolution and resin couplings for low resolution. (As a rough guide, a high resolution is one that exceeds 3,600 ppr.) Even for applications requiring relatively low resolution, a metal coupling will provide more reliability in applications involving rapid acceleration/deceleration or for Encoders with high starting torque.

Comparison of Specifications for 6-mm Shafts

Machine specification	Material	Resin (standard type)	Metal (aluminum, helical)
Eccentricity (mm)		0.5	0.15
Eccentricity (degrees)		6	3
Deviation in shaft direction (mm)		±0.4	±0.15
Allowable torque (N·m)		0.8	1.6
Torsion rigidity (Nm/rad)		7	28
Moment of inertia (kg·m ²)		1.2 × 10 ⁻⁷	6 × 10 ⁻⁷
Weight (g)		4	12

Characteristics

Material	Advantages	Disadvantages
Resin (standard type)	- Low cost. - Easy shaft alignment when mounting. - Lightweight and low moment of inertia, placing a smaller load on the drive system.	- Low torsion rigidity and thus not suitable for high resolution. - Mounting is possible even if the shafts are greatly misaligned, which can cause damage from fatigue over long periods of application.
Metal (aluminum, helical)	- High torsion rigidity and thus suitable for high resolution. - Transmitted allowable torque is large.	- High cost. - Heavy and thus place a large load on the drive system. - The allowable shaft misalignment is small, so accurate positioning is required when mounting.

Coupling Suitability Table

○ : Suitable and provided with product, Δ: Suitable and sold separately, ---: Not suitable.

Couplings	Specification	Resin, standard type					Resin, different end diameter		Metal	
		2 dia. (Height: 8), 9 dia.	4 dia. (Height: 8), 13 dia.	6 dia. (Height: 8), 15 dia.	8 dia. (Height: 8), 19 dia.	10 dia. (Height: 8), 22 dia.	6 dia., 8 dia., (Height: 8), 19 dia.	6 dia., 10 dia., (Height: 8), 22 dia.	6 dia. (Height: 8), 19.1 dia.	10 dia. (Height: 8), 25.4 dia.
Rotary Encoder Model/shaft dia.	Model	E69-C02B	E69-C04B	E69-C06B	E69-C08B	E69-C10B	E69-C68B	E69-C610B	E69-C06M	E69-C10M
E6A2-C 4 dia.		---	○	---	---	---	---	---	---	---
E6B2-C 6 dia.		---	---	○	---	---	Δ	Δ	Δ	---
E6C2-C 6 dia.		---	---	Δ	---	---	Δ	Δ	Δ	---
E6C3-C 8 dia.		---	---	---	Δ	---	Δ	---	---	---
E6D-C 6 dia.		---	---	○	---	---	Δ	Δ	Δ	---
E6F-C 10 dia.		---	---	---	---	Δ	---	Δ	---	Δ
E6H-C Hollow shaft interior dia.: 8 mm		Hollow-shaft Model; Coupling not required.								
E6J-C 2 dia.		○	---	---	---	---	---	---	---	---
E6CP-A 6 dia.		---	---	○ Sold separately only for E6CP-AG5C-C.	---	---	Δ	Δ	Δ	---
E6C3-A 8 dia.		---	---	---	Δ	---	Δ	---	---	---
E6F-A 10 dia.		---	---	---	---	○ Only Pre-wired Models	---	Δ	---	Δ
E6J-A 4 dia.		---	○	---	---	---	---	---	---	---


*Tolerance conforms to JIS standard: JIS B 0401. →Refer to page 2.

(Unit: mm)

Coupling Dimensions

Tolerance class IT16 applies to dimensions in this datasheet unless otherwise specified.


E69-C02B



Material: Glass-reinforced PBT

Applicable model: E6J-C


E69-C04B



Material: Glass-reinforced PBT


Applicable model: E6A2-C, E6J-A

E69-C06B



Material: Glass-reinforced PBT


E69-C06M



Material: Extra-super duralumin


Applicable model: E6B2-C, E6C2-C, E6D-C, E6CP-A

E69-C10B

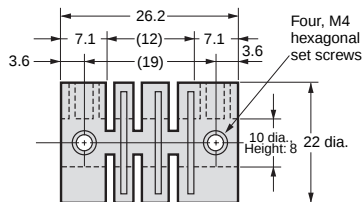

Material: Glass-reinforced PBT


E69-C10M



Material: Extra-super duralumin

Applicable model: E6F-C, E6F-A

E69-C08B

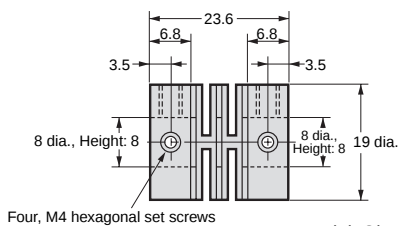


Material: Glass-reinforced PBT

Applicable model: E6C3-A, E6C3-C

E69-C68B

Model with Different End Diameter

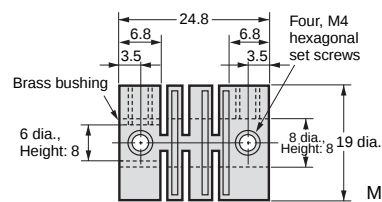


Material: Glass-reinforced PBT

Applicable model: E6B2-C, E6C2-C, E6C3-C, E6D-C, E6CP-A, E6C3-A

E69-C610B

Model with Different End Diameter

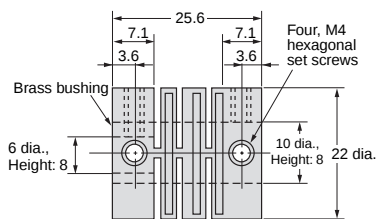

Material: Glass-reinforced PBT

Applicable model: E6B2-C, E6C2-C, E6D-C, E6F-C, E6CP-A, E6F-A

Standard hole dimensions (mm)		Tolerance (m)
Min.	Max.	Height: 8
---	3	+14 0
3	6	+18 0
6	10	+22 0

Flanges and Servo Mounting Brackets

Flange and Servo Mounting Bracket Suitability Table

○: Suitable and provided with product, Δ: Suitable and sold separately, ---: Not suitable.


Rotary Encoder Model	Type Model Remarks	Flange						Servo Mounting Bracket	
		E69-FBA	E69-FCA	E69-FCA03	E69-FBA02	E69-FCA02	E69-FCA04	E69-1	E69-2
					E69-2 Servo Mounting Bracket provided.				
E6A2-C		---	---	---	---	---	---	○ Provided with the E6A2-CWZ.	---
E6B2-C		Δ	---	---	Δ	---	---	---	Δ
E6C2-C		---	Δ	---	---	Δ	---	---	Δ
E6C3-C		---	---	Δ	---	---	Δ	---	Δ
E6D-C		---	---	---	---	---	---	---	○
E6F-C		---	---	---	---	---	---	---	Δ
E6H-C		Hollow-shaft Model; Flange not required.							
E6CP-A		---	---	---	---	---	---	---	○
E6C3-A		---	---	Δ	---	---	Δ	---	Δ
E6F-A		---	---	---	---	---	---	---	○

Flange Dimensions

(Unit: mm)


Tolerance class IT16 applies to dimensions in this datasheet unless otherwise specified.

E69-FBA

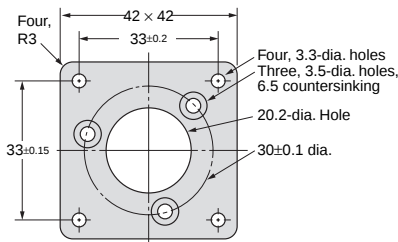


Material: SPCC
Thickness: 3.2
Applicable model: E6B2-C
Note: Three phillips screws M3 × 6 provided

E69-FCA

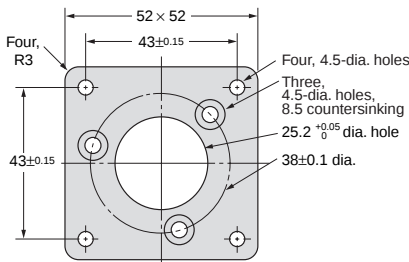


Material: SPCC
Thickness: 3.2
Applicable model: E6C2-C
Note: Three phillips screws M4 × 8 provided

E69-FCA03

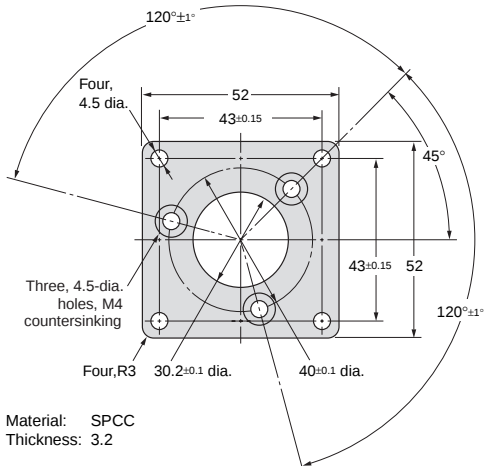


Material: SPCC
Thickness: 3.2
Applicable model: E6C3-A, E6C3-C
Note: Three phillips screws M4 × 8 provided

E69-FBA02




Material: SPCC
Thickness: 3.2
Applicable model: E6B2-C
Note: Three phillips screws M3 × 10 provided, E69-2 Servo Mounting Bracket provided

Mounting Diagram For the E6B2-C

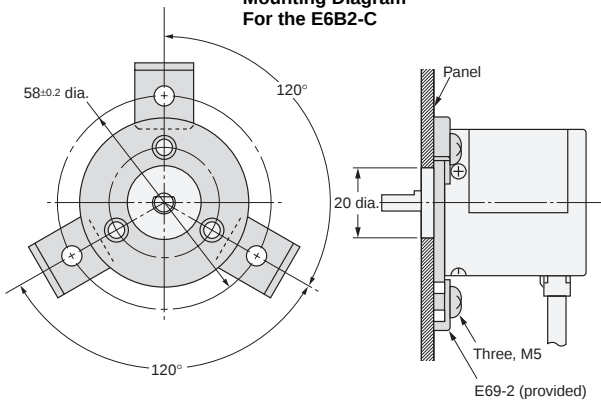

E69-FCA02

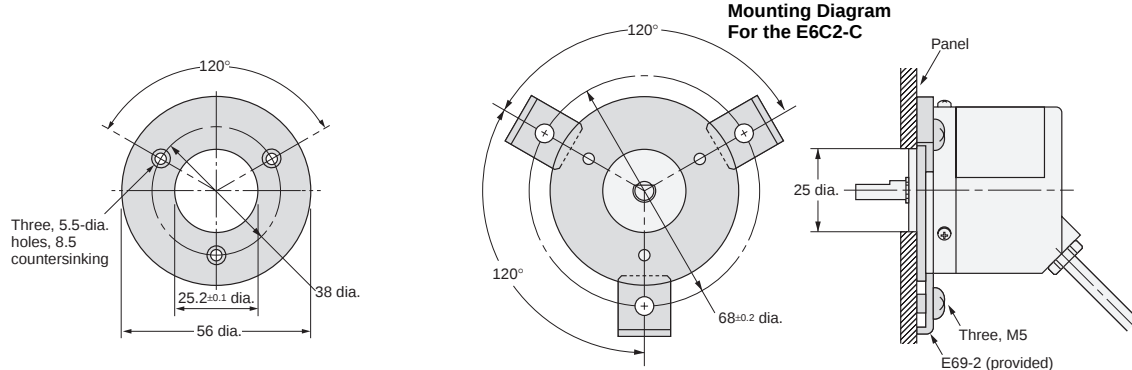


Material: SPCC
Thickness: 3.2

Applicable model: E6C2-C

Note: Three phillips screws M4 × 10 provided, E69-2 Servo Mounting Bracket provided

E69-FCA04

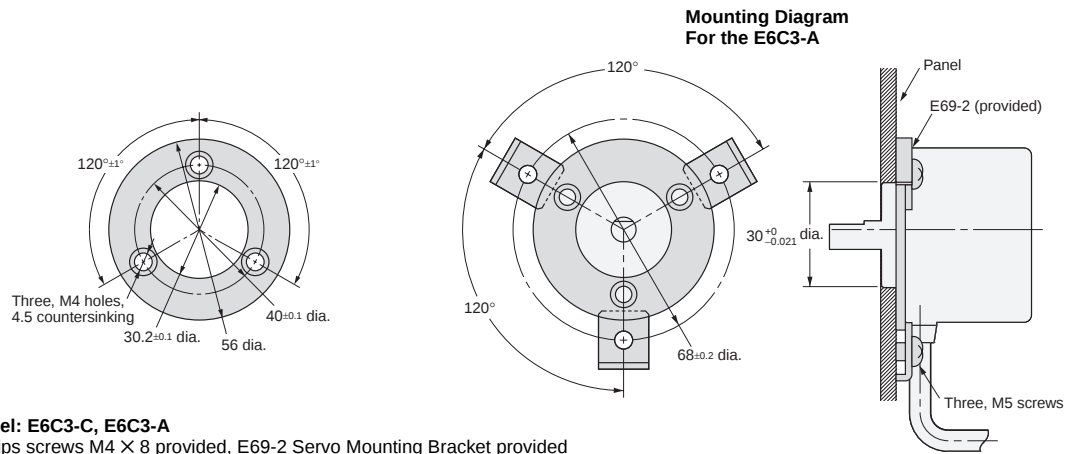

Material: SPCC
Thickness: 3.2

Applicable model: E6C3-C, E6C3-A


Note: Three phillips screws M4 × 8 provided, E69-2 Servo Mounting Bracket provided

Servo Mounting Bracket Dimensions

(Unit: mm)


Tolerance class IT16 applies to dimensions in this datasheet unless otherwise specified.

E69-1 (Three brackets in a set.)

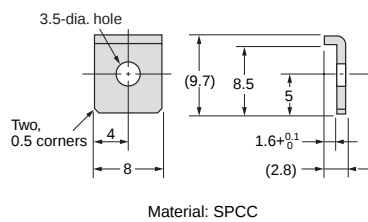

Applicable model: E6A2-C

E69-2 (Three brackets in a set.)

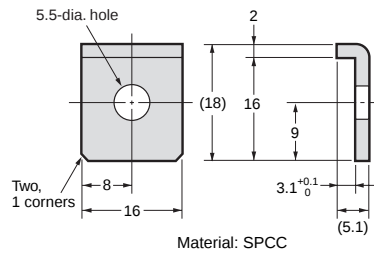

Applicable model:
E6B2-C, E6C2-C,
E6C3-CWZ□H, E6D-C,
E6F-C, E6CP-A,
E6C3-A, E6F-A