




LTR	ECCO No.	REVISION	DR	CK	AP	AP	DATE
A	NONE	ENGINEERING RELEASE	JK				10/29/07
B	8705	UPDATE BORDER & LOGO	J.O				1 JUNE 09



**NOTES:**

- RACK MOUNTED STEEL CHASSIS, BLACK MEDIUM TEXTURE  
19.00" WIDE  
1.72" HIGH  
7.00" DEEP  
CHASSIS SUPPORT BRACKETS ARE REQUIRED
- INPUT: 100 - 240 VAC 12A SINGLE PHASE 50/60HZ.  
INLET: IEC 60320 C14 INLET  
POWER CORD: NOT INCLUDED
- CONTROL SWITCHES:  
1 GREEN BUTTON (ON)  
1 BLACK BUTTON (OFF)  
1 BLACK BUTTON (EPO TEST)  
(OPERATES ALARM HORN AND EPO LIGHT ONLY)  
1 YELLOW BUTTON (ALARM SILENT)
- INDICATOR LIGHTS: FIVE  
1 GREEN, FOR CIRCUIT BREAKER STATUS OF REMOTE PDU  
(ON WHEN UNIT IS CONNECTED TO 100 - 240VAC)  
1 GREEN, ON WHEN REMOTE UNIT IS SWITCHED ON.  
1 RED, ON WHEN EMERGENCY POWER OFF IS ACTIVATED.  
1 GREEN, ON WHEN EPO IS IN RESET CONDITION (EPO OFF).  
1 RED, ON WHEN ALARM SILENT IS ACTIVATED.
- REMOTE I/O SWITCHING CONNECTORS: 6  
MATE WITH AMP # 1-480305-0 CONNECTOR, WITH AMP # 60620-1 PINS  
J1 & J2: REMOTE ON/OFF AND EPO OUTPUT COMMAND TO REMOTE POWER CONTROLLER (PIN 1 TO 3 FOR REMOTE ON/OFF AND PIN 2 TO 3 FOR EMERGENCY POWER OFF).  
J3: CONNECT PINS 1 AND 2 FOR EPO (12VDC CIRCUIT)  
J4: CONNECT PINS 1 AND 2 TO SILENCE EPO ALARM (12VDC CIRCUIT)  
J5-J6: SPDT CONTACTS TO CONTROL AUXILIARY EQUIPMENT.  
  

1		NORMALLY CLOSED
2		COMMON
3		NORMALLY OPEN
- HOUR METER: 6 DIGIT; ON WHEN REMOTE UNIT IS ON  
RESOLUTION: 1/10TH OF AN HOUR
- ALARM HORN: 90dB AT 4IN. ON WHEN EPO IS ACTIVATED.
- EMERGENCY OFF SWITCH: RED MUSHROOM PUSHBUTTON SWITCH.  
PUSH TO ACTIVATE EMERGENCY POWER OFF.  
TURN KNOB TO RESET EPO, RESET INDICATOR AND REMOTES J5 AND J6.
- EACH UNIT SUPPLIED WITH 8-FOOT CABLE WITH CONNECTOR FOR J2 ON ONE END AND 3-PIN MALE AMP CONNECTOR ON THE OTHER END
- U.L. RECOGNIZED COMPONENTS WHERE APPLICABLE
- RoHS COMPLIANT PER DIRECTIVE 2002/95/EC WITH APPLICABLE EXEMPTIONS

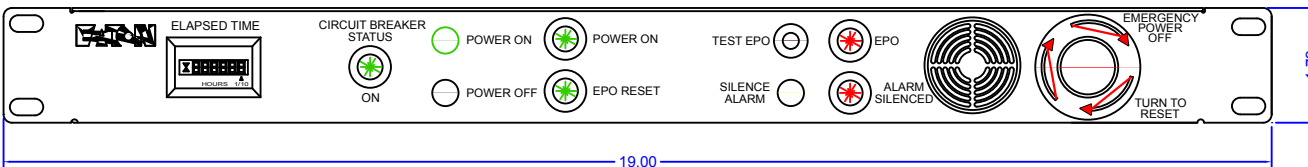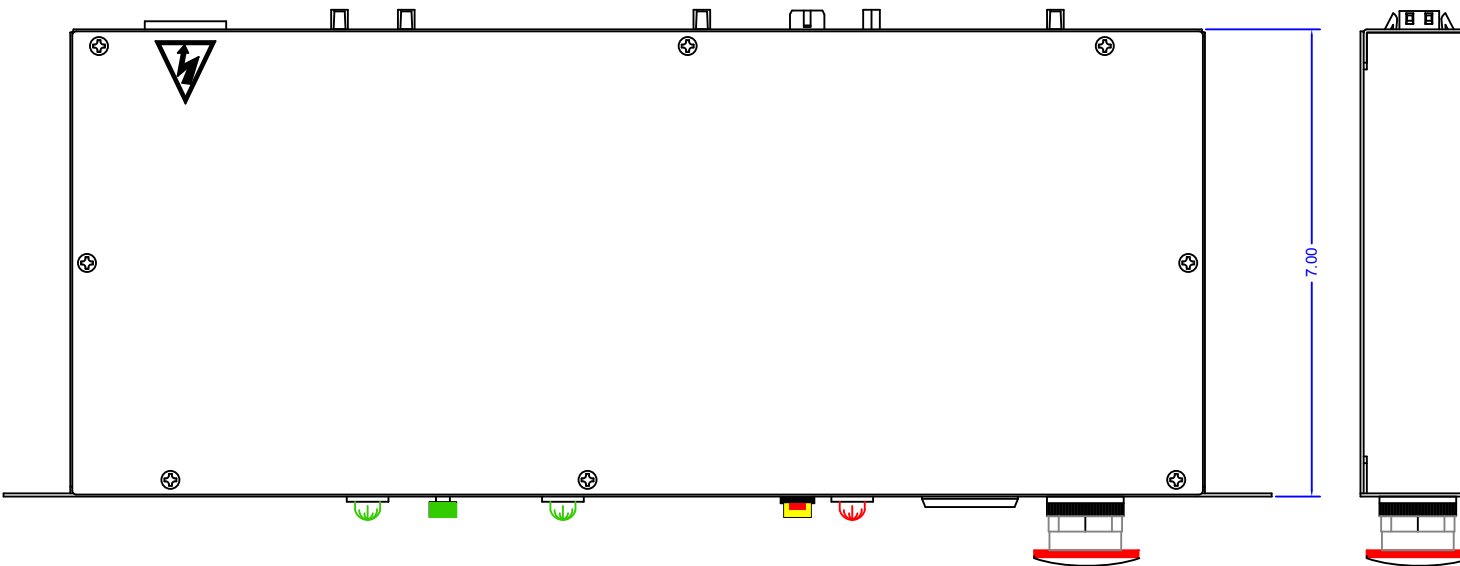

HONEYWELL APPROVAL DATE

		3200 S. Susan Street, Santa Ana, CA 92704 Phone (714) 540-4229 Fax (714) 641-9062 www.epdu.com	
THE INFORMATION AND DESIGN DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF EATON CORPORATION. EATON CORPORATION RESERVES ALL PATENT, PROPRIETARY DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALE RIGHTS THEREIN AND TO ANY ARTICLE DISCLOSED THEREIN, EXCEPT TO THE EXTENT RIGHTS ARE EXPRESSLY GRANTED TO OTHERS. THE FOREGOING DOES NOT APPLY TO VENDOR PROPRIETARY PARTS. COPYRIGHT © 2009 EATON CORPORATION			
DIMENSIONS IN INCHES TOLERANCES: DECIMALS .0005 FRACTIONS 1/32 UNLESS OTHERWISE SPECIFIED		TITLE <b>ENGINEERING DRAWING</b> <b>RCP2500-3609 ASSY 3609</b>	
DRAWN BY: JK SCALE: 1:1 SHEET: 1 OF 1 CAGE CODE: 70512	UNLESS OTHERWISE SPECIFIED SCALE: 1:1 SHEET: 1 OF 1 CAGE CODE: 70512	DRAWING NO.: RCP_2500_3609B_ME.DWG SHEET: 1 OF 1 CAGE CODE: 70512	REV: B