

ESB24 installation contactors

24 A AC-1 / AC-7a

AC / DC operated



ESB24

2CDC221005F0010

Description

The ESB24 installation contactors are used for the control of single and three-phases loads up to 24 A. Due to their DC solenoid actuator, the ESB24 can be connected to AC or DC voltages. This provides the following benefits:


Hum-free operation, low power consumption, integrated high overvoltage protection. Various N.O. and N.C. contacts combinations available.

Main accessories: Auxiliary contact blocks EH04.

Ordering details

Main contacts	Width in number of modular spacings	Rated control circuit voltage	Type	Order code	Pkg qty	Weight (1 pc)
		V AC/DC			pcs	kg
	2	12	ESB24-40-12AC/DC	GHE3291102R1004	5	0.245
		24	ESB24-40-24AC/DC	GHE3291102R0001	5	0.245
		42	ESB24-40-42AC/DC	GHE3291102R0002	5	0.245
		48	ESB24-40-48AC/DC	GHE3291102R0003	5	0.245
		110	ESB24-40-110AC/DC	GHE3291102R0004	5	0.240
		230	ESB24-40-230AC/DC	GHE3291102R0006	5	0.235
	2	400	ESB24-40-400AC/DC	GHE3291102R0007	5	0.235
		12	ESB24-04-12AC/DC	GHE3291202R1004	5	0.245
		24	ESB24-04-24AC/DC	GHE3291202R0001	5	0.245
		42	ESB24-04-42AC/DC	GHE3291202R0002	5	0.245
		48	ESB24-04-48AC/DC	GHE3291202R0003	5	0.245
		110	ESB24-04-110AC/DC	GHE3291202R0004	5	0.240
	2	230	ESB24-04-230AC/DC	GHE3291202R0006	5	0.235
		400	ESB24-04-400AC/DC	GHE3291202R0007	5	0.235
		12	ESB24-22-12AC/DC	GHE3291302R1004	5	0.245
		24	ESB24-22-24AC/DC	GHE3291302R0001	5	0.245
		42	ESB24-22-42AC/DC	GHE3291302R0002	5	0.245
		48	ESB24-22-48AC/DC	GHE3291302R0003	5	0.245
	2	110	ESB24-22-110AC/DC	GHE3291302R0004	5	0.240
		230	ESB24-22-230AC/DC	GHE3291302R0006	5	0.235
		400	ESB24-22-400AC/DC	GHE3291302R0007	5	0.235
		12	ESB24-31-12AC/DC	GHE3291602R1004	5	0.245
		24	ESB24-31-24AC/DC	GHE3291602R0001	5	0.245
		42	ESB24-31-42AC/DC	GHE3291602R0002	5	0.245
	2	48	ESB24-31-48AC/DC	GHE3291602R0003	5	0.245
		110	ESB24-31-110AC/DC	GHE3291602R0004	5	0.240
		230	ESB24-31-230AC/DC	GHE3291602R0006	5	0.235
		400	ESB24-31-400AC/DC	GHE3291602R0007	5	0.235
		12	ESB24-13-12AC/DC	GHE3291702R1004	5	0.245
		24	ESB24-13-24AC/DC	GHE3291702R0001	5	0.245
	2	42	ESB24-13-42AC/DC	GHE3291702R0002	5	0.245
		48	ESB24-13-48AC/DC	GHE3291702R0003	5	0.245
		110	ESB24-13-110AC/DC	GHE3291702R0004	5	0.240
		230	ESB24-13-230AC/DC	GHE3291702R0006	5	0.235
		400	ESB24-13-400AC/DC	GHE3291702R0007	5	0.235

Main dimensions mm, inches

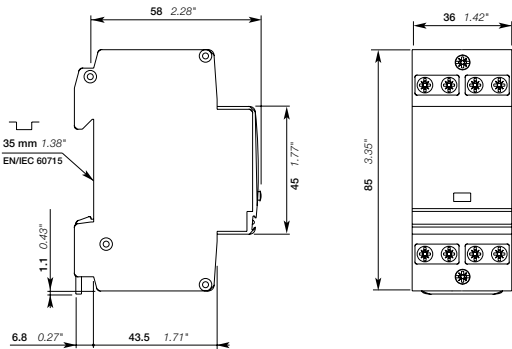

ESB24

2CDC22005F0014