

R contactors for AC circuit switching

3

Rated operational voltage

Ue from 500 up to **1000 V AC**



Contactor type			IORR63..MT	IORR125..MT	IORR200..MT	IORR400..MT	IORR500..MT	IORR800..MT
Categories	Ue							
AC-1	at 40 °C	Ie	85 A	170 A	260 A	400 A	550 A	800 A
AC-3	690 V AC	Ie	85 A	160 A	260 A	400 A	550 A	800 A
	1000 V AC max.	Ie	56 A	105 A	180 A	280 A	380 A	580 A
AC-3	690 V AC	Power	80 kW	150 kW	240 kW	400 kW	540 kW	780 kW

*120 V 60Hz coil and 2 N.O. + 2 N.C. auxiliary contacts as standard




Rated operational voltage

Ue up to **500 V AC**



Contactor type		- IORR800	
Categories	Ue		
AC-1 at 40 °C		Ie	From 85 A to 550 A, select above IOR...-MT 900 A
AC-3	380-415-440 V AC	Ie	- 800 A
	500 V AC max.	Ie	- 800 A
AC-3	400 V AC	Power	- 450 kW

*120 V 60Hz coil and 2 N.O. + 2 N.C. auxiliary contacts as standard

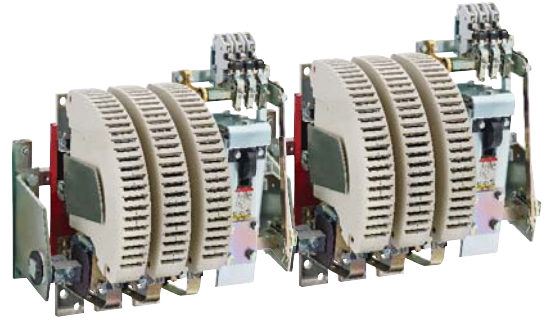

IORR1400..MT

IORR1700..MT

IORR2100..MT

IORR2500..MT

IORR3200..MT

IORR3800..MT

IORR4500..MT

IORR5100..MT

1250 A

1650 A

1850 A

2200 A

3000 A

3500 A

4000 A

4500 A

970 A

1170 A

1270 A

–

–

–

–

–

610 A

680 A

810 A

–

–

–

–

–

1000 kW

1200 kW

1300 kW




–

–

–

–

–

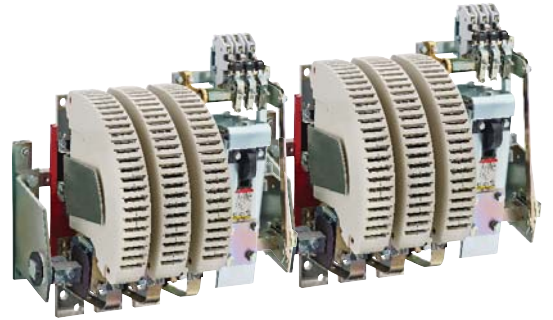

IORR1000

IORR1400

IORR1700

IORR2100

IORR2500

IORR3200

IORR3800

IORR4500

IORR5100

1000 A

1350 A

1650 A

2000 A

2400 A

3200 A

3800 A

4500 A

5000 A

800 A

1080 A

1260 A

1520 A

–

–

–

–

–

800 A

1080 A

1220 A

1340 A

–

–

–

–

–

450 kW

630 kW

750 kW

900 kW

–

–

–

–

–

15BC10403 8F0000

IORR800-30

IORR contactors are used for controlling AC power circuits up to 500 V AC.

- variable number of poles according to the application
- control circuit: AC operated
- 2 NO + 2 NC auxiliary contacts available, as standard

AC-3					Number of poles	Rated control circuit voltage U _c (1)	Auxiliary contacts fitted (2)	Type	Order code	Weight Pkg (1 pce) kg
Rated operational power										
380 V	440 V	500 V	current ≤ 440 V	θ ≤ 40 °C						
400 V										
415 V										
kW	kW	kW	A	A		V 50/60 Hz				
450	500	560	800	900	2	120V	2 2	IORR800-20	FPL8615215R2113	38
					3		2 2	IORR800-30	FPL8615315R2113	48
					4		2 2	IORR800-40	FPL8615415R2113	58
-	-	-	-	1000	2	120V	2 2	IORR1000-20	FPL8715215R2113	38
					3		2 2	IORR1000-30	FPL8715315R2113	48
					4		2 2	IORR1000-40	FPL8715415R2113	58
630	710	800	1080	1350	2	120V	2 2	IORR1400-20	FPL6115215R2113	40
					3		2 2	IORR1400-30	FPL6115315R2113	50
					4		2 2	IORR1400-40	FPL6115415R2113	63
750	800	900	1260	1650	2	120V	2 2	IORR1700-20	FPL6215215R2113	44
					3		2 2	IORR1700-30	FPL6215315R2113	56
					4		2 2	IORR1700-40	FPL6215415R2113	72
900	1000	1000	1520	2000	2	120V	2 2	IORR2100-20	FPL6315215R2113	48
					3		2 2	IORR2100-30	FPL6315315R2113	62
					4		2 2	IORR2100-40	FPL6315415R2113	78
-	-	-	-	2400	2	120V	2 2	IORR2500-20	FPL6715215R2113	On request
					3		2 2	IORR2500-30	FPL6715315R2113	
-	-	-	-	3200	2	120V	2 2	IORR3200-20	FPL6515215R2113	On request
					3		2 2	IORR3200-30	FPL6515315R2113	
-	-	-	-	3800	2	120V	2 2	IORR3800-20	FPL6615215R2113	On request
					3		2 2	IORR3800-30	FPL6615001R2113	
-	-	-	-	4500	2	120V	2 2	IORR4500-20	FPL6815215R2113	On request
					3		2 2	IORR4500-30	FPL6815001R2113	
-	-	-	-	5000	2	120V	2 2	IORR5100-20	FPL6915001R2113	On request
					3		2 2	IORR5100-30	FPL6915002R2113	

(2) Other auxiliary contact arrangements, please contact us.