Product data sheet

Specifications





① Discontinued - Service only

gearbox with straight teeth GBX- Ø 160 mm- reduction 32:1- < 10arcmin- 800 N.m

GBX1600321402F

() Discontinued on: Jun 15, 2023

() To be end-of-service on: Mar 31, 2028

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Range Compatibility	Lexium 52
	Lexium 15
	Lexium 32
	Lexium 62 ILM
	Lexium 62
Product or Component Type	Planetary gearbox
Gear box type	Straight teeth
Device short name	GBX
Gearbox external diameter	6.3 in (160 mm)
Product compatibility	SH3
	MH3
	ILM
Reduction ratio	32:1

Complementary

Maximum torsional backlash	10 arc.min
Torsional rigidity	41 N.m/arcmin
Housing Colour	Black
Housing material	Black anodized aluminium
Shaft material	C 45
Additional information	Lubricated for life
Service life in hours	30000 h 100 rpm 86.0000000000 °F (30 °C)
Efficiency	94 %
Mounting position	Any position
Maximum radial force Fr	4200 N 100 rpm, force applied at mid-distance from output shaft during 30000 hour
	at 30 °C 6000 N 100 rpm, force applied at mid-distance from output shaft during 10000 hour
	at 30 °C
Maximum axial force Fa	6000 N 100 rpm, during 30000 hour at 30°C
	8000 N 100 rpm, during 10000 hour at 30°C
moment of inertia	0.002 lb.in² (6.36 g.cm²)
Continuous output torque	7080.6 lbf.in (800 N.m) 100 rpm 86.0000000000 °F (30 °C)
Maximum output torque	11328.9 lbf.in (1280 N.m) 100 rpm 86.0000000000 °F (30 °C)

Price is "List Price" and may be subject to a trade discount - check with your local distributor or retailer for actual price.

Net Weight

48.5 lb(US) (22 kg)

Environment

Noise level	70 dB 1 m, no-load
IP Degree of Protection	Shaft output IP54
ambient temperature for operation	-13.000000000194.000000000 °F (-2590 °C)

Ordering and shipping details

Category	US1PC5318283
Discount Schedule	PC53
GTIN	3389118144958
Returnability	No
Country of origin	DE

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	10.2 in (26.0 cm)
Package 1 Width	17.7 in (45.0 cm)
Package 1 Length	10.2 in (26.0 cm)
Package 1 Weight	50.7 lb(US) (23.0 kg)

Contractual warranty

Warranty

18 months

Sustainability Screen Premium

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



Transparency RoHS/REACh

Well-being performance


Mercury Free
Rohs Exemption Information Yes
Pvc Free

Certifications & Standards

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information.
Environmental Disclosure	Product Environmental Profile
Circularity Profile	No need of specific recycling operations
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Dimensions Drawings

Dimensions

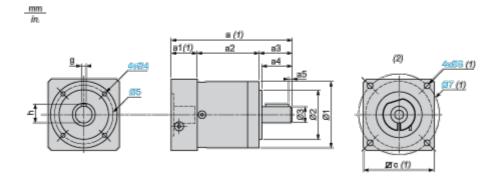

(1) Dimensions a, a1, c, Ø6 and Ø7 depend on the planetary gearbox/servo motor combination

(2) Servo motor assembly

Dimensions in mm

a2	a3	a4	a5	h	g	Ø1	Ø2	Ø3	Ø4 (oblong)	Ø5
153.5	87	80	8	43	12	160	130 h7	40 h7	M12 x 20	145

Dimensions in mm

а	a1	С	Ø6	Ø7
305	64.5	140 x 140	M10	165

Dimensions in in.

a2	a3	a4	a5	h	g	Ø1	Ø2	Ø3	Ø4 oblong	Ø5
6.04	3.42	3.14	0.31	1.69	0.47	6.29	5.12 h7	1.57 h7	M12 x 0.79	5.70

Dimensions in in.

а	a1	С	Ø6	Ø7
12.00	2.53	0.21 x 0.21	M10	6.49